


### SYMBOLS

▲ The **WARNING** symbol indicates a potentially hazardous condition/situation. The safety warnings throughout this manual, and on your equipment, if any, are for the protection of people and property. Failure by any operator to abide by safety warnings will result in a waiver of all liabilities, loss of your warranty, and could result in equipment damage and or failure, property damage, risk of serious bodily injury, and or death. The symbol may appear in various colors and in conjunction with other symbols and with or without the written word "WARNING".

### SETUP AND USE

1. Read and follow all labels, instructions, and warnings prior to use. For additional safety information, or to obtain a copy of labels, instructions, and warnings, call 1-800-451-1903, or visit [www.ezaccess.com](http://www.ezaccess.com).
2. The ramp is shipped fully assembled. To unfold for use, position the folded ramp so that the top lip transition plate (located on the end of the ramp that is labeled TOP) fully overlaps a secure, unobstructed, level landing and is securely supporting the ramp (FIG. 1).
3. Unfold the ramp, then center the ramp on the upper landing (FIG. 1).
4. Ensure that the surface area of the top lip transition plate fully overlaps a secure, unobstructed, level landing enough to safely ensure the ramp is securely fixed before each use (FIG. 2).
  - a. **SEMI-PERMANENTLY:** To attach semi-permanently using non-provided anchoring hardware, position the ramp securely and use the hole in the top lip transition.
5. To prevent the ramp halves from swinging open when carrying the ramp, be sure ramp handle halves are joined.

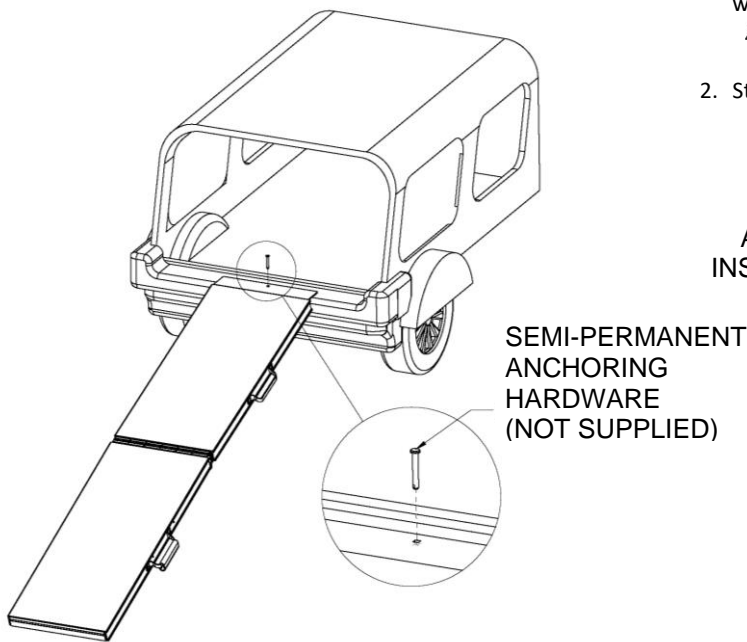

**FIG. 1**

### WARNINGS


- ▲ Maximum weight capacity is 150 lbs.; never exceed weight capacity.
- ▲ Ensure that the landings the ramp will be placed on are substantial and of sound construction.
- ▲ Ensure that the surface area of the top lip transition plate fully overlaps a secure, unobstructed, level landing enough to safely ensure that the ramp is securely fixed before each use.
- ▲ Use only if the secure, unobstructed level landings can support, at minimum, the same weight capacity as the ramp (150 lbs.).
- ▲ Always exercise caution when handling, installing, and or using the ramp. Improper use of the ramp could result in serious injury.
- ▲ Before each use, check the ramps for worn, loose, or damaged parts. If any part of the ramp is unstable, damaged, or defective, do not use.
- ▲ Do not tamper with, attempt to repair, or modify any portion of the ramp.
- ▲ Use caution when folding and unfolding the ramp to avoid all potential pinch points.
- ▲ The ramp surface may be slippery in wet conditions; use caution if the surface is wet as traction may be reduced.
- ▲ Do not use the ramp if its surface is covered with ice, snow, dirt, leaves, or other debris. Remove all accumulations and sweep the surface clean before use.

### STORAGE

To prevent damage and injury, always store the ramp securely.

### MAINTENANCE

1. Keep all ramp surfaces clear of ice, snow, dirt, leaves, and other debris. For ice and or snow, remove all accumulations and sweep surface clean. For dirt, leaves, and other debris, sweep surface or wash with a soft bristle brush and non-alkaline detergent; rinse well.
  - ▲ The ramp surface may be slippery in wet conditions. Use caution if surface is wet as traction may be reduced.
2. Store the ramp in a cool, dry place when not in use.

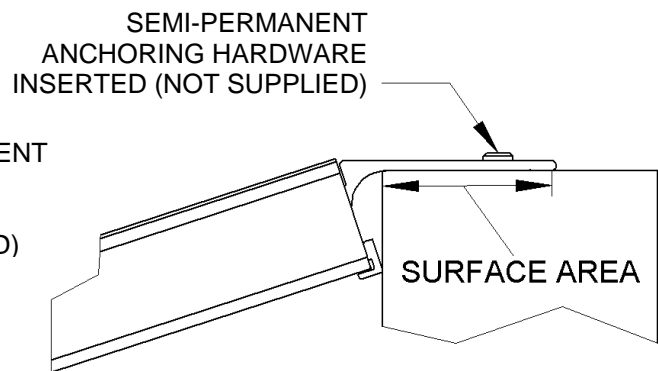

**FIG. 2**