


CONFIDENTIAL

SUPPORT ASSEMBLIES ARE DESIGNED TO AISC SPECIFICATIONS. IF NO MOVEMENT OF SUPPORT ASSEMBLIES IS REQUIRED, THEN BRACING TO BUILDING STEEL IS RECOMMENDED (NOT INCLUDED).

BRIDGE TROLLEY TRAVEL IS 20'-3 9/16". ENDTRUCK TRAVEL IS 20'-3 1/2".

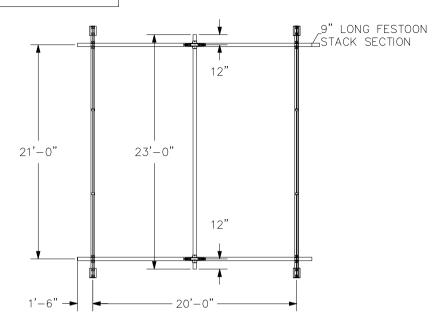


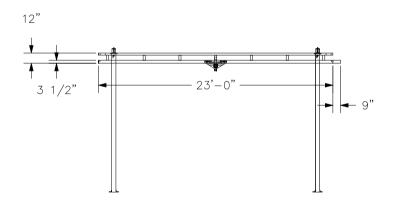

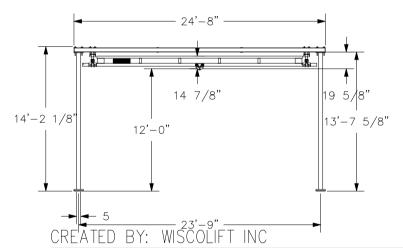

HANGERS ARE ON 20' CENTERS MAXIMUM WITH A 48" CANTILEVER ON EACH END MAXIMUM. HANGERS MUST BE WITHIN 48" OF SPLICE JOINT

DO NOT SCALE FROM DRAWING. DIMENSIONS ARE STEEL TO STEEL AND MAY VARY. HANGER POSITION TOLERANCE $=\pm 2.1/2$ "



CRANE INFORMATION		
CAPACITY: 2000LBS/BR		
BRIDGE OAL: 23'-0"		FISHERS RUN P.O. BOX 593
BRIDGE SERIES: 2000		RS, NY 14453-0593
RUNWAY OAL: 23'-0"	GLCS-FS-2000-23-23-12	
RUNWAY SERIES: 2000	GENERAL	ARRANGEMENT
TOLERANCE: ±1/8	BY: bilcon	DATE: AUG 5, 2015
QUANTITY: 1	LINE #: 3	P/N: DEMO2000FS.3A
I.D. #: DEMO2000FS.3A		