

COMMERCIAL

Refrigeration Equipment 1-Door Glass Froster Slide Top 24" +33/+41°F BLACK-R600a

ITEM #		
MODEL #		
NAME #		
-		
SIS #		
AIA #		



738327 (KCHGF24)

1-Door Glass Froster Slide Top 24" +33/+41°F BLACK-R600a

Short Form Specification

Item No.

24° wide glass/mug/plate froster with slide top. Exterior back and side panels in painted steel, exterior bottom panel in galvanized steel, top panel in 304 stainless steel; interior back and side panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and electronic temperature control. Vinyl-coated steel adjustable dividers and locking lids. R600a gas in refrigeration circuit. ETL Safety and Sanitation certified. 3/5 Years warranty.

Main Features

- ADA Height Compliant
- External temperature display.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worryfree performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Vinyl-coated steel adjustable dividers to customize storage effortlessly


Construction

- CFC and HCFC free (ecological refrigerant type: R600a).
- Pre-wired heavy duty power cord.
- Electronic control to select temperatures.

APPROVAL:



Refrigeration Equipment 1-Door Glass Froster Slide Top 24" +33/+41°F BLACK-R600a

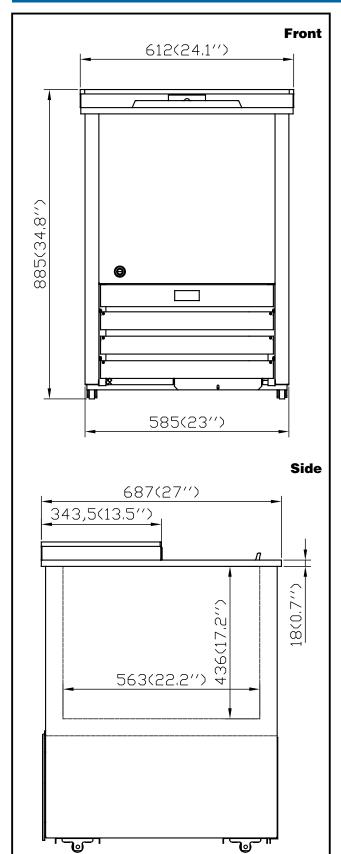

Electric

Supply voltage:

738327 (KCHGF24) 120 V/1 ph/60 Hz

Electrical power, max: 0.7 kW
Plug type: NEMA 5-15

Key Information:

Capacity:3.53148 cu.ft.External dimensions, Width:26 3/4" (680 mm)External dimensions, Depth:25 9/16" (650 mm)External dimensions, Height:41 5/16" (1050 mm)

Internal Dimensions (depth): 14 3/4" Internal Dimensions (height): 13 3/4" Internal Dimensions (width): 16 7/8"

Shipping volume: 18.48 ft³ (0.52 m³)

Refrigeration Data

Operating temperature min.: -11 °F Operating temperature max.: -0.8 °F

Sustainability

Current consumption:

Refrigerant type: R290



EI = Electrical connection

