

COMMERCIAL

Refrigeration Equipment 1-Door Glass Froster Slide Top 36" +33/+41°F Black (R600A)



738328 (KCHGF36)

1-Door Glass Froster Slide Top 36" +33/+41°F BLACK-R600a

Short Form Specification

Item No.

36" wide glass/mug/plate froster with slide top. Exterior back and side panels in painted steel, exterior bottom panel in galvanized steel, top panel in 304 stainless steel; interior back and side panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and electronic temperature control. Vinyl-coated steel adjustable dividers and locking lids. R600a gas in refrigeration circuit. ETL Safety and Sanitation certified. 3/5 Years warranty.

| ITEM # | | |
|---------|------|------|
| MODEL # | | |
| NAME # | | |
| SIS # | | |
| AIA # | | |
| | | |

Main Features

- ADA Height Compliant
- External temperature display.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worryfree performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Vinyl-coated steel adjustable dividers to customize storage effortlessly

Construction

- CFC and HCFC free (ecological refrigerant type: R600a).
- Pre-wired heavy duty power cord.
- Electronic control to select temperatures.

APPROVAL:



Refrigeration Equipment 1-Door Glass Froster Slide Top 36" +33/+41°F Black (R600A)



Front

| Supply voltage: | | |
|--|------------------|--|
| 738328 (KCHGF36) | 120 V/1 ph/60 Hz | |
| Electrical power, max: | 0.2 kW | |
| Defrost Power | | |
| Plug type: | NEMA 5-15 | |
| Maximum Over-Current Protection (MOP): | 0A | |
| | | |

Key Information:

| Capacity: | 6.35666 cu.ft. | |
|-------------------------------|---|--|
| External dimensions, Width: | 38 3/16" (970 mm) | |
| External dimensions, Depth: | 28 3/4" (730 mm) | |
| External dimensions, Height: | 39 3/8" (1000 mm) | |
| Internal Dimensions (depth): | 14 3/4" | |
| Internal Dimensions (height): | 13 3/4" | |
| Internal Dimensions (width): | 29 11/16" | |
| Shipping height: | 277 15/16" (7060 mm) | |
| Shipping weight: | 238 lbs (108 kg) | |
| Shipping volume: | 186.04 ft ³ (5.27 m ³) | |
| Type of external material: | Black Prepainted Steel | |
| Type of internal material: | 304 AISI | |
| Approvals | ;ETL C&USETL SANITATION | |
| | | |

Refrigeration Data


| Operating temperature min.: | -14.4 °F |
|-----------------------------|----------|
| Operating temperature max.: | -3.5 °F |
| Refrigerant type: | |

Sustainability

Current consumption: Refrigerant type:

R290

°F

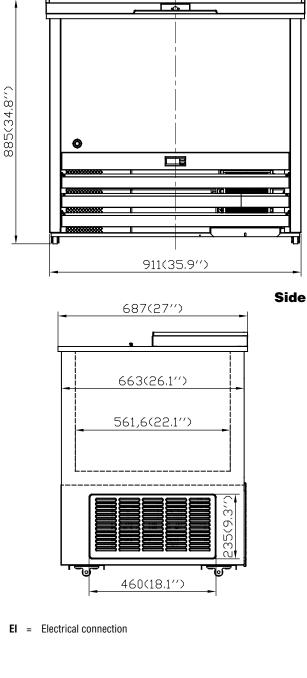



Refrigeration Equipment 1-Door Glass Froster Slide Top 36" +33/+41°F Black (R600A)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.