

CATALOG 2023 EDITION ADHESIVE TAPE

FOR WIDE VARIETY OF APPLICATIONS

Thai KK Industry Company Limited

with 40 years of experience in manufacturing **high-quality adhesive tapes**, we are able to innovate new products that fits **all types of applications**















T. 02 338 4900 F. 02 338 4905 FB. thaikk.co.th Line. @thaikk Tiktok. @thaikk_lifestyle





CONTENTS

Company Profile	3
Technology Overview	4
Quality Overview & Systems	5
Best Sell	6
New Products	8
What does micron mean in tape?	10

INDUSTRIAL PACKAGING & PRINTING

OPP Tape (OPT)	12
OPP-BR Tape (OPT-BR)	13
OPP-Color Tape (OPT-C)	14
OPP-Custom Printed Tape (OPT-P)	15
OPP-Hotmelt Tape (OPTHM)	16
OPP-Hotmelt Printed Tape (OPTHM-P)	17
OPP-Hybrid Tape (OPT-HB)	18
Bag Sealing Tape (OST-C)	19
Kraft Tape (KTE)	20

ELECTRICAL INSULATION

PVC Electrical Tape (VTB)	21
PVC Electrical Color Tape (VTC)	22
PVC Electrical TIS Tape (VTB -TIS)	23

CONSTUCTION REPAIRING

Masking Tape - Stationery (MCT-KK Blue)	24
Masking Tape - Packaging (MCT-KK Orange)	25
Masking Tape - Painting (MCT-KK Grey)	26
Masking Tape - Car Spray (MCT-KK Green)	27
Masking Tape - High-Temp (MCT-KK Yellow)	28
Washi Tape (WST)	29
Filament Tape (FLT)	30
Aluminum Foil Tape (FOL)	31

MOUNTING & JOINING

Double Side Tissue Tape-Solvent Base (DT-S)	32
Double Side Tissue Tape-Water Base (DT-W)	33
Double Side Tissue Tape-Hotmelt Base (DT-H)	34
Double Side EVA Foam Tape (FDT-WS-GREEN)	35
Double Side PE Foam Tape (EFDT-RED)	36

SECURITY AND SAFETY

Warning Tape (FMT-Color)	37
Warning Tape (FMT-Y#B)	38
Warning Tape (FMT-W#R)	38

PROTECTION

Surface Protection Tape (PT-CL , PTH-CL)	39
Surface Protection Tape (PT-BL, PTH-BL)	39

LINT REMOVE

Lint Remover Tape (KTE-BL)	40
Lint Remover Tape (KTE-UW)	40

ENVIRONMENT CARE

41

NEW PRODUCTS

Bio Tape (KTBIO)

Cloth Tape (CT)	42
OPP No Noise (OPTNS)	43
OPP Economic Grade (OPT-36MIC)	44
Washi Tape (Cute Masking Tape)	45
PET Clear Printed Tape (Cartoon Printed Tape)	51
Nano Magic Tape (Clear Double Side Tape)	55
Screen Repair Tape	56
Self Fusion Tape (ERPT)	57

COMPANY PROFILE



ABOUT THAI KK

Our Mission is to deliver a WOW product & customer experience by creating walking innovations, sustainable, lifestyle products that fits your everyday needs. Thai KK Group focuses on proactive approach to product high-quality products, with global certifications, to serve the global demands in all industries.

Thai KK Industry Company Limited - with 40 years of experience in manufacturing high-quality adhesive tapes, we are able to innovate new products that fits all types of applications.



Thai KK Industry Co., Ltd. was established in 1978. It originally started to operate in the domestic market. With the adoption of conglomerate strategies and new market shares from export sales, Thai KK has transformed to a multinational company in recent times.

VIDEO

2012

Thai KK is a market leader in Label Industry, Adhesive Tapes, Melamine and Urea moulding compounds. The plant is situated on 60 rai of land (88,000 M2), with about 500 employees in year 2015.

2019

Thai KK is a market leader in Label Industry, Adhesive Tapes, Melamine and Urea Moulding compounds.



TECHNOLOGY OVERVIEW



MACHINE

was established in 1978. It originally stransformed to a multinational company in recent times.



ADHESIVE

Emulsion/Solvent/Hotmelt We can formulate various pressure sensitive adhesive technologies that enable converters and end-users to easily meet those customer demands.

AROMATIC SOLVENT RECOVERY

Our systems use the process of distillation which separates volatile and nonvolatile solutions in solvent adhesive.

SEMI-AUTOMATIC SLITTING

To convert and package the widest possible range of materials of any single machine available on the market today.



QUALITY OVERVIEW & SYSTEMS



ISO 9001:2015

International quality assurance system assures its products and services are at a high quality standard for our customers.



RoHS

Restrictions of Hazardous Substances, The original RoHS, restricts the use of ten hazardous materials found in electrical and all tape products.



TIS STANDARDS

JON. 386-2531Certified pressure-sensitive adhesive tapes for electrical purposes, operating temperature between **0 to 80 degree celcius.**



UL CERTIFICATIONS

At Thai KK, we offer a complete product range for UL certified adhesive tapes. Our adhesive tapes have high technical and quality performances for electrical Insulation safety.









PVC Insulation Tape

- Page 22



PVC Insulation Tape (TIS) - Page 23








OPP Printed Tape - Page 15





OPP Hybrid Tape

- Page 18

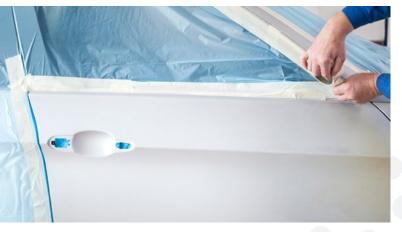





Masking Tape - Page 24-28





- Page 31



NEW PRODUCTS







Cloth Tape

For the general usings such as sealing, documenting and multipurpose applications that require extra strength. - Page 42



OPP No Noise

Suitable for Multi purpose carton sealing, it can be used for removals, shipping and storage, shipping box and suitable for work at night or when others is resting. - Page 43



OPP 36 Micron

Suitable for general carton sealing, suitable for low weight~1kg, Use in stationary, household, office, and light shipping in factory.

- Page 44







Washi Tape **Cute Masking Tape**

- Page 45



Clear Printed Tape

- Page 51



Nano Magic Tape - Page 55




Screen Repair Tape - Page 56



Self Fusion Tape - Page 57



What does micron mean in tape? How is it related to the packing tape's business?



Each type of adhesive tape, including OPP tape is related to "micron," which tells us the thickness and the application that it is suitable for **Tape's thickness** is usually measured in microns or " μ m," and there are sometime two measurements of thickness – both of the adhesive and the backing.

The adhesive thickness will give you an idea, based on the quality and tack of the adhesive, of how much adhesion force the tape will exert on the box. Below are the weight and applications in which our tape is suitable for.



MICRON FOR OPP TAPE

KK Pink



TAPE OPP 36 micron

can hold **up to 1 kg** (for application such as envelope sealing purposes).

KK Red



TAPE OPP 38 micron

this is a standard grade for OPP tape and can be used for carton sealing boxes **from 1–3 kgs (for applications such as face mask delivery boxes, shoe boxes, courier envelopes).**

KK Blue



TAPE OPP 40 micron

can be used for carton sealing boxes **from 3–5 kgs** (for applications such as cups and bakery boxes).

KK Violet



TAPE OPP 43 micron

can be used for carton sealing boxes **from 5–8 kgs** (for applications such as cartons for plants, electronics, or other small electronic parts).

KK Orange



TAPE OPP 45 micron this is a preferred grade of OPP tape and can be

used for carton sealing boxes **from 5–10 kgs** (for applications such fruit delivery boxes, vitamin and supplements delivery boxes).

Maximum weight



KK Gray



TAPE OPP 48 micron

can be used for carton sealing boxes **from 10–15 kgs** (for applications such as medium sized electronics, heavy beverage cans and bottles).

KK Yellow



TAPE OPP 50 micron

this is a premium grade of OPP tape and is suitable for more industrial uses and can be used for carton sealing boxes **from 30 kgs** (for applications such as large electronics, coffee machines, or any heavy duty purposes).

KK Black



TAPE OPP 65 micron

suitable for larger industrial uses and can be used for carton sealing boxes **from 35–40 kgs** (for applications such as large electronics, heavy alcohol or beverage bottles, or any heavy duty purposes). **OPP Tape (OPT)**

ОРР Таре

Color



General Property

- ✓ Surface: Bi Oriented Polypropylene Film
- Adhesive: Acrylic Emulsion Base

Clear

- ✓ Suitable for use in Room Temperature and Low Temp (-5°C)
- ✓ More film options and adhesive thickness available for different weight requirements

Product Details


Туре	Thickness (Microns)	Product Image Width (mm)	Length (Yd)	Core ID (Inch)	Box (Rolls)	Capacity Load (kgs)		
KK Red	38 ±2	12 mm. 18 mm. 24 mm.	20	1.5", 3.0"				< 3 kgs.
KK Blue	40 ±2	12 mm. 18 mm. 24 mm.	20, 30, 45, 50		144 Rolls	< 3-5 kgs.		
KK Violet	43 ±2	12 mm. 18 mm. 24 mm.	50			< 5-8 kgs.		
KK Orange	45 ±2	Image: Second system Image: Se	45, 50,			< 5-10 kgs.		
KK Gray	48 ±2	36 mm. 48 mm. 60 mm. 72 mm.	100, 500, 1000,	3.0"	72 Rolls	< 10-15 kgs.		
KK Yellow	50 ±2	36 mm. 48 mm. 60 mm. 72 mm.	1500, 1500			< 30 kgs.		

- Jumbo size: 1280mm x 4000M, 1610mm x 6000M, 1610mm x 8000M
- OEM : Available on request
- OPP Tape is also available in custom width and lenght in option



Applications

Carton sealing - suitable for packing and sealing boxes that are light, medium, and heavy weight uses. Choosing the right packaging tape for the corrugated carton is key for securing the contents property.





OPP-BR TAPE (OPT-BR)

OPP-BR Tape

OPT-BR

Color


- Brown



General Property

- ✓ Surface: Bi Oriented Polypropylene Film
- ✓ Adhesive: Acrylic Emulsion Based with Brown pigment
- ✓ Suitable for use in Room Temperature and Low Temp (-5°C)
- ✓ More film options and adhesive thickness available for different weight requirements

Product Details

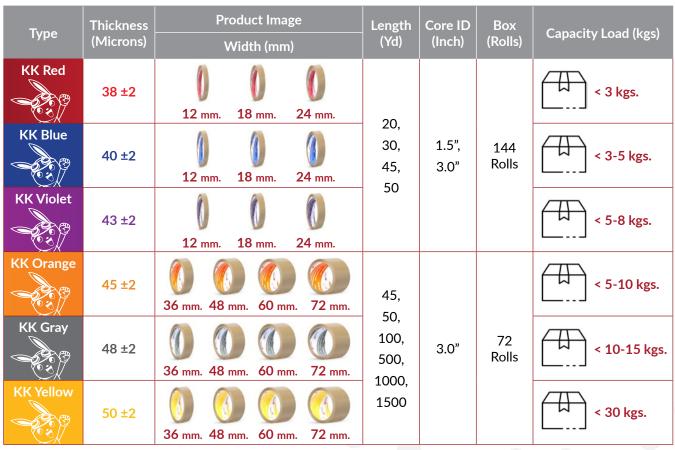

• Jumbo size: 1280mm x 4000M, 1610mm x 6000M, 1610mm x 8000M

• OEM : Available on request




Applications

Carton sealing - suitable for packing and sealing boxes that are light, medium, and heavy weight uses. Choosing the right packaging tape for the corrugated carton is key for securing the contents property.



OPP-Color Tape



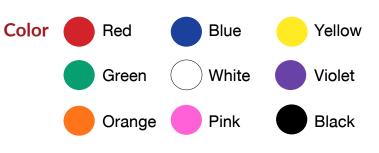



General Property

- ✓ Surface: Bi Oriented Polypropylene Film
- Adhesive: Acrylic Emulsion Based with several pigments
- ✓ Suitable for use in Room Temperature and Low Temp (-5°C)
- ✓ Great adhesion and seal strength, available in 9 colors

Product Details

Туре	Thickness (Microns)	Product Image Width (mm)		Length (Yd)	Core ID (Inch)	Box (Rolls)	Capacity Load (kgs)	
KK Green	50 ±2	0 18 mm. 0 48 mm.	24 mm.	36 mm. 72 mm.	45, 50, 100, 500, 1000	1.5", 3.0"	72 Rolls	< 15 kgs.

- Jumbo size: 1280mm x 4000M
- Thickness (Microns) 45 ±2 : Available on request
- OEM : Available on request



Applications For color coding packages, identifying cartons and boxes (FIFO process). Suitable for inventory organization and product categorization.





OPP-Custom Printed Tape

OPTP



General Properties

✓ BOPP Tape with high tensile strength, coated with acrylic water-based adhesive

Standard Design: Fragile / Caution / Do Not Accept / Thank You / For You / Season Greeting Customized Design:


Flexo Printing Tape

MOO 1-10 Box

Customized logo to help increase your brand recognition

- Available in both clear background and opaque color
- ✓ Suitable for use in Room Temperature and Low Temp (-5°C)

Product Details

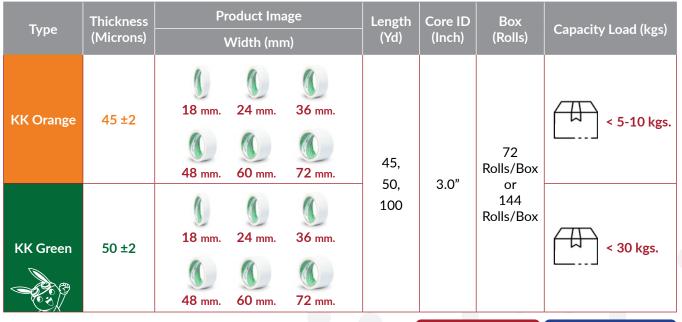

• Jumbo size: 1280mm x 4000M, 990mm x 2000M

• OEM : Logo Available on request



Applications


For advertising corporate or brand identity, logistics, plastic bag sealing, carton sealing, mailer bag, and security purposes.

Suitable for cartons sealing medium to heavy-weight.

Maximum weight

Gravure Printing Tape

MOQ 10+ Boxes



INDUSTRIAL PACKAGING

THAIKK GROUP

OPP-Hotmelt Tape

OPTHM

Color



Dark-Brown

General Property

- ✓ Surface: Bi Oriented Polypropylene Film
- Adhesive: Hotmelt Adhesive
- ✓ Suitable for use in Room Temperature, Chilled and Cold Temp (-40°C)
- ✓ Good water resistance and moisture resistance

Product Details





Туре	Thickness (Microns)	Product Image Width (mm)	Length (Yd)	Core ID (Inch)	Box (Rolls)	Capacity Load (kgs)
KK Orange	45 ±2	24 mm. 36 mm. 28 mm. 60 mm. 72 mm.	45, 50,	01	72,	< 15 kgs.
KK Gray	48 ±2	24 mm. 36 mm. 48 mm. 60 mm. 72 mm.	100, 500, 1000	3"	144 Rolls	< 20 kgs.

- Jumbo size : On request
- OEM : Available on request



Applications High performance tap

High performance tape with high tensile strength film.

Suitable for a variety of surfaces applications involving hard-to stick surfaces (recycled corrugated or polypropylene coating). Applicable for heavy duty shipping, frozen food export, and for sealing product that requires moisture resistance.



OPP HOTMELT PRINTED TAPE (OPTHM-P)

OPP-Hotmelt Printed Tape

OPTHM-P

Color



General Property

- OPP Tape with high tensile strength, coated with hotmelt adhesive based
- Excellent Adhesion and cohesion performance
- ✓ Suitable for use in Room Temperature and Cold Temp (-40°C)
- Printing Colors: 1-3 Colors

Clear



Product Details

Туре	Thickness (Microns)	Product Image Width (mm)			Length (Yd)	Core ID (Inch)	Box (Rolls)	Capacity Load (kgs)
KK Green	50 ±2	48 mm.	60 mm.	72 mm.	45, 50, 100, 300, 1000	3.0"	48, 72 Rolls	< 30 kgs.

• Jumbo size : On request

• OEM : Logo Available on request



Applications

For advertising corporate or brand identity, logistics, plastic bag sealing, carton sealing, mailer bag, and security purposes. Suitable for cartons sealing medium to heavy-weight.







OPP-HYBRID TAPE (OPT-HB)

OPP-Hybrid Tape

OPT-HB







General Property

- ✓ Surface: More thick Bi Oriented Polypropylene Film 0.040mm
- ✓ Adhesive: Hybrid Acrylic Emulsion Base
- ✓ Use Room Temperature and Cold Temp (-20°C)
- ✓ Superior impact resistance and shear resistance

Product Details



Туре	Thickness (Microns)	Product Image Width (mm)	Length (Yd)	Core ID (Inch)	Box (Rolls)	Capacity Load (kgs)
	60 ±3	36 mm. 48 mm.	45, 50,	3"	72 Rolls	< 35 kgs.
KK Black	65 ±3	60 mm. 72 mm.	100, 1000			< 40 kgs.


- Jumbo size : 1610mm x 6000M
- OEM : Available on request



Applications

High performance tape with high tensile strength film.

Suitable for a variety of surfaces applications involving hard-to stick surfaces (recycled corrugated or polypropylene coating). Applicable for heavy duty shipping, frozen food export, and for sealing product that requires moisture resistance.






INDUSTRIAL PACKAGING

BAG SEALING TAPE (OST-C)

Bag Sealing Tape







General Property

- ✓ Surface: Bi Oriented Polypropylene Film
- ✓ Adhesive: Hotmelt Adhesive for Plastic sealing
- ✓ Suitable for room temperature and for Cold Temp with humidity
- ✓ Full range of bag and film sealing solutions (bakery)

Product Details

Туре	Thickness (Microns)	Product Image Width (mm)			Length (Yd)	Core ID (Inch)	Box (Rolls)	Capacity Load (kgs)
KK Gray	48 ±2	9 mm.	0 12 mm.	0 15 mm.	50	3"	384 Rolls	< 1 kgs.

• Small size : On request

• OEM : Available on request



Applications

Suitable for plastic bag sealing for bakery, department stores, shopping malls, or supermarkets, for classifying packaging for customers. Also applicable for handcraft decorations, 5S board, etc.



KRAFT TAPE (KTE)

Kraft	Tape
KTE	-

Color

Natural Brown

General Property

- ✓ Surface: Premium Brown PE Kraft Release Paper
- ✓ Adhesive: Solvent base Rubber Adhesive
- Suitable for use in Room Temperature and Cold Temp (-20°C)
- Excellent moisture resistance, good adhesion and can be easy to tear by handle





Product Details

Туре	Thickness (Microns)	Product Image Width (mm)	Length (Yd)	Core ID (Inch)	Box (Rolls)	Capacity Load (kgs)
KK Yellow	145 ±10	24 mm. 36 mm. 48 mm. 60 mm. 72 mm.	30, 40, 100	3"	36 Rolls	< 30 kgs.

- Jumbo size : 1056mm x 600M, 1056mm x 1000M
- OEM : Available on request



Applications

For general purpose packing that are easy to tear by hand, good for use in normal ambient temperature. Suitable for use in household, office, and many industry. Kraft Paper Tape also gives an environmental-friendly feel for your product.





PVC Electrical Tape

VTB



Black



General Property

- Surface: Black Polyvinyl Chloride (PVC) Insulation Film
- ✓ Adhesive: Rubber Solvent Base
- Can be applied over a wide range of temperature up to 80°C
- High performance, great flexibility and durability
- Water resistant, good abrasion resistance, UV resistant


Product Details



Grade / Series	Thickness (Microns)	Product Image Width (mm)	Length (M)	Core ID (Inch)	Box (Rolls)	Maximum Breakdown (Voltage)
VTB-11 KK Gray	105 ±10	18 mm.	10,	4 5"	100 Rolls,	
VTB-12 KK Green	120 ±10	18 mm.	20	1.5"	200 Rolls	4,800 Volts

• Lead Free

• OEM (Length start at 7 yards) : Available on request



Applications

Electrical tapes can be used to insulate wires that conduct electricity and can cause flames. Generally, it can be used for insulation, protection, bundling, maintenance and many other applications. It is also excellent for preventing weather abrasions, and are resistance to water, moisture and corrosion.


Maximum Breakdown voltage



PVC ELECTRICAL COLOR TAPE (VTC)

VTC

PVC Electrical Color Tape





General Property

- Surface: Color Polyvinyl Chloride (PVC) Insulation Film
- ✓ Adhesive: Rubber Solvent Base
- Can be applied over a wide range of temperature up to 80°C
- High performance, great flexibility and durability
- ✓ Water resistant, good abrasion resistance, UV resistant

Product Details



Grade / Series	Thickness (Microns)	Product Image Width (mm)	Length (M)	Core ID (Inch)	Box (Rolls)	Maximum Breakdown (Voltage)
VTC-11 KK Gray	105 ±10	18 mm.	10,	4 5"	100 Rolls,	
VTC-12 KK Green	120 ±10	18 mm.	20	1.5"	200 Rolls	4,800 Volts

Lead Free

OEM (Length start at 7 yards) : Available on request



Applications

Electrical tapes can be used to insulate wires that conduct electricity and can cause flames. Generally, it can be used for insulation, protection, bundling, maintenance, color coding and many other applications. It is also excellent for preventing weather abrasions, and are resistance to water, moisture and corrosion.

Maximum Breakdown voltage



22 | Leading Tape Manufacturer



PVC ELECTRICAL TAPE TIS - VTB -TIS

PVC Electrical Tape (TIS) VTB-TIS



General Property

- Surface: Flame Retardant grade on PVC InsulationFilm
- Adhesive: Strong Rubber Solvent Based
- Can be applied over a wide range of temperature up to 80°C
- Great for flame retardant, self-distinguishing and durability
- Water resistant, good abrasion resistance, UV resistant

Product Details





Grade / Series	Thickness (Microns)	Product Image Width (mm)	Length (M)	Core ID (Inch)	Box (Rolls)	Maximum Breakdown (Voltage)
VTB-12F (TIS)	125 ±25	19 mm.	10,	1.5"	100 Rolls, 200 Rolls	40KV/mm at Room Temp 35KV/mm after Humidity condition
VTB-18F (TIS)	180 ±25	19 mm.	20	1.5		

• Lead Free

Non-flammable and Self-Extinguishing



Applications

For wrapping of cable connection with flame retardant property, prevent abrasion that resistance to water/moisture and corrosion that suitable for marking safety areas, product wrapping smoothly.

Maximum Breakdown voltage



40KV/mm at Room Temp

35KV/mm after Humidity condition





MASKING TAPE (STATIONERY) - MCT

Masking Tape (Stationery)



) Natural White



Adhesive

Rubber Solvent

Application Temp

60°C

General Property

- ✓ Surface: Natural White Crepe Coating Paper
- ✓ Adhesive: Rubber Solvent Adhesive
- Use indoor masking and writing for smoothness surfaces
- Easy to tear by hand and clean removable on surfaces

Product Details


Туре	Thickness (Microns)		ge I)	Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)	
KK Blue	145 ±15	0 12 mm. 0 36 mm.	0 18 mm. 0 48 mm.	24 mm. 60 mm.	20, 30, 40, 100	3"	36 Rolls, 48 Rolls	€0°C

- Jumbo size : 1250mm x 2000M
- OEM : Available on request



Applications

For stationery general purpose masking tape in economic grade with good enough adhesion for light packaging, bundling, in-door painting and holding and non-critical masking. Ideal for stationery and DIY.





MASKING TAPE (PACKAGING) - MCT

Masking Tape (Packaging)

MCT-KK Orange



Natural Cream



General Property

- ✓ Surface: Natural Cream Crepe Coating Paper
- ✓ Adhesive: Rubber Solvent Adhesive
- Easy written on surface and most use indoor masking
- Easy to tear by hand and clean removable on surfaces





Product Details

Туре	Thickness (Microns)	Product Image Width (mm)			Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
KK Orange	135 ±15	12 mm. 0 36 mm.	0 18 mm. 0 48 mm.	24 mm. 60 mm.	20, 30, 40, 100	3"	36 Rolls, 48 Rolls	80 °C

- Jumbo size : 1540mm x 1500M, 1230mm x 1500M
- OEM : Available on request



Applications

For general purpose masking tape for packaging, bundling, holding, splicing, masking, and labeling that suitable for using in household, office, and industrial clean and residue free removable.






MASKING TAPE (PAINTING) - MCT

Masking Tape (Painting)



Natural Beige



General Property

- ✓ Surface: Natural Beige Crepe Coating Paper
- ✓ Adhesive: Strong Rubber Solvent Adhesive
- Both use interior painting & outdoor painting and automotive car spray water base repairing
- Clean removable with no adhesive surfaces



Product Details


Туре	Thickness (Microns)	Product Image Width (mm)			Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
KK Grey	165 ±15	12 mm. 36 mm.	0 18 mm. 0 48 mm.	24 mm.	20, 30, 40, 100	3"	36 Rolls, 48 Rolls	₩ 100 °C

- Jumbo size : 1250mm x 1600M
- OEM : Available on request



Applications

This masking tape in good strong backing with suitable for painting, indoor painting and splicing. This masking can excellent waterproof crepe for wet sanding application and clean and residue free removal. Ideal used in some automotive collision repair industry.



MASKING TAPE (CAR SPRAY) - MCT

Masking Tape (Car Spray)

MCT-KK Green



Yellow-Brown

General Property

- ✓ Surface: Yellow-Brown Crepe coating Paper
- ✓ Adhesive: Stronger Rubber Solvent Adhesive
- Suitable for automotive car spray repairing and painting
- Waterpoof in wet sanding process



Product Details

Туре	Thickness (Microns)	Product Image Width (mm)	Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
KK Green	135 ±15	12 mm. 18 mm. 24 mm. 36 mm. 48 mm.	20, 30, 40	3"	36 Rolls, 48 Rolls	¥ 120 ℃

- Jumbo size : 1445mm x 1500M
- OEM : Available on request



Applications

Good performance masking tape with suitable for after-market automotive car spray painting, indoor painting and splicing. This masking can excellent waterproof crepe for wet sanding application and cleaner removable with automotive collision repair industry.





MASKING TAPE (HIGH-TEMP) - MCT

Masking Tape (High-Temp)

MCT-Yellow

Color

Yellow-Cream



General Property

- ✓ Surface: Yellow-Cream Crepe coating Paper
- ✓ Adhesive: Stronger Rubber Solvent adhesive
- ✓ Suitable for industrial high heat process masking
- Strong water poof in wet sanding process
- $\checkmark\,$ Smoothness surfaces for writing

Product Details



Туре	Thickness (Microns)	Product Image Width (mm)	Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
KK Yellow	145 ±15	12 mm. 18 mm. 24 mm. 36 mm. 48 mm.	20, 30, 40	3"	36 Rolls, 48 Rolls	₩ 150 °C

- Jumbo size : 1445mm x 1500M
- OEM : Available on request



Applications

Premium grade of with stand high temperature and leave no residue when surface removed for trouble application masking, bundling, holding, splicing, painting, and labeling that suitable for industrial. Strong waterproof properties, suitable for wet sanding applications.



Washi Tape

. .

Color () White





General Property

- ✓ Surface: Flat Thin Crepe Coating Paper
- Adhesive: Acrylic Emulsion Base
- Multi-purpose in decorate paper masking
- Easily removable without leaving residue or damage surface





WASHI TAPE (WST)

Product Details

Туре	Thickness (Microns)	Product Image Width (mm)			Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
KK Grey	120 ±10	0 12 mm.	18 mm.	24 mm.	10, 20, 30	1.5"	36 Rolls, 48 Rolls	80 ℃

• Jumbo size : 1230mm x 1800M



Applications

For a washi tape in this general grade with household, super durable and flexible enough adhesion and doesn't leave a sticky residue behind pull out.





FILAMENT TAPE (FLT)

Filament Tape



Light yellowish



General Property


- ✓ Surface: Fiberglass Filament OPP Film
- Adhesive: Rubber Solvent Base
- ✓ Best tensile strength of strapping from fiberglass
- ✓ Durable hold up under handling. Can support weight well



Product Details

Туре	Thickness (Microns)	Product Image Width (mm)	Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
KK Yellow	155 ±15	0 0 18 mm. 24 mm. 0 0 36 mm. 48 mm.	30, 50	3"	36 Rolls, 48 Rolls	₩ 80 °C

- Jumbo size : 1020mm x 1000M
- OEM : Available on request



Applications

For strapping rods, moldings, tubes, plywood without danger of scratching, staining or damaging, reinforce cartons, protecting contents from pilferage, holding doors, loose parts on stoves, refrigerator while in transit.





ALUMINUM FOIL TAPE (FOL)

Acryl

Aluminum Foil Tape FOL

Color

Silver

General Property

- ✓ Surface: Good Conductive Aluminum Foil
- Adhesive: Both Acrylic Emulsion and Acrylic Solvent
- ✓ Use Low Temperature to High Temp (-10°C to 80°C)
- ✓ Moisture resistance and chemical resistance, thermal conductivity

Adhesive Cold Temp High Tem -10°C 80°C

Product Details

Type	Type Thickness		Product Image			Core ID	Box	Temp. Use (°C)
Type	(Microns)		Width (mm)	(Yd)	(Inch)	(Rolls)		
FOL#25 KK Orange	50 ±3	50 mm.	63.5 mm.	75 mm.				
FOL#30 Valu Green <i>Valu Tape</i>	60 ±5	5 0 mm.	63.5 mm.	5 mm.			20 Rolls, 25 Rolls, 30 Rolls	446
FOL#1 Valu Red <i>Valu Tape</i>	65 ±5	50 mm.	63.5 mm.	75 mm.	50	3"		-10 °C
FOL#35 KK Yellow	77 ±5	50 mm.	63.5 mm.	75 mm.				۲
FOL#45 KK Green	87 ±5	50 mm.	63.5 mm.	75 mm.				

Jumbo size : 1035mm x 1000M

OEM : Available on request



<u>THAIKK</u>

Applications

Aluminum Foil of medium tack pressure sensitive with high holding power. For general purpose of wrapping the joints of surface in normal ambient temperature and non-flammable.

Self-Extinguishing **Flammability**



Double Side Tissue Tape

DT-Solvent Based

Color

() White

General Property

- ✓ Surface: Tissue paper flat base
- ✓ Adhesive: Acrylic Solvent Base
- ✓ Most like substates@ metal, plastic and paper
- ✓ Moisture resistance and water resistance on sticky

Product Details





Туре	Thickness (Microns)	Product Image Width (mm)	Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
DT-S#1 KK Grey	90 ±5	0 12 mm. 18 mm. 24 mm. 0 36 mm. 48 mm.	10, 20,	3"	48 Rolls, 72 Rolls,	€ -10-80 °C
DT-S#2 KK Orange		12 mm. 18 mm. 24 mm. 36 mm. 48 mm.	40		96 Rolls	

- Jumbo size : 1040mm x 1000M, 1260mm x 1000M
- OEM : Available on request



Applications

For superior performance joining of paper, film, and other substrate that suitable for printed matters, plastic goods, clothes, papers, advertising boards, name plates, electric or electronic parts, cooling equipment, and office automation.





External mounting

MOUNTING & JOINING

DOUBLE SIDE TISSUE TAPE (DT-W)

Double Side Tissue Tape

DT-Water Based

Color

White

General Property

- ✓ Surface: Tissue paper flat base
- ✓ Adhesive: Acrylic Emulsion Base
- Most like paper and plastic substates as Poster
- Good aging resistance for mounting

Product Details



(Z)	
Good Aging	Adhesiv
Resistant	Acrylic Emu

/e lsion

Туре	Thickness (Microns)	Product Width		Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
DT-W#1 KK Red	90 ±5	12 mm. 24 mm.	0 18 mm. 0 36 mm.	10,	3"	48 Rolls, 72 Rolls,	<u>∽-5-70 °C</u>
DT-W#2 KK Blue		0 12 mm. 0 24 mm.	0 18 mm. 0 36 mm.	20		96 Rolls	

- Jumbo size : 1040mm x 1000M, 1240mm x 1000M
- OEM : Available on request



Applications

For stationery purpose joining of paper, film, and other substrate that is suitable for printed matters, plastic goods, papers using in the household, office. Slightly soft performance in plastic bag sealing.



Interior mounting

Double Side Tissue Tape

DT-Hotmelt Base

Color

White

General Property

- ✓ Surface: Tissue paper flat base
- ✓ Adhesive: Hotmelt acrylic base
- Most like fiber textile, foam laminate and plastic substates \checkmark
- Good cold weather resistance for mounting

Product Details





Temp. Use (°C)

5-70 °C

Core ID

(Inch)

3"

Box

(Rolls)

48 Rolls,

72 Rolls, 96 Rolls

(H-T	✓ Good co	old weather r	esistance for mounting		
E (C	Product E	Details			
E TAP	Туре	Thickness (Microns)	Product Image Width (mm)	Length (Yd)	C
DOUBLE SIDE TISSUE TAPE (DT-H)	DT-H#1 KK Violet	60 ±5	0 12 mm. 18 mm. 18 mm. 24 mm. 36 mm.	10,	
DOI	DT-H#2 KK Yellow	120 ±5	0 12 mm. 18 mm.	20	

• Jumbo size : 1040mm x 1000M

• OEM : Available on request



Applications

24 mm.

This product, For Cold application high adhesion. It is usually used for textile, garment, a variety of leather wallets and backpacks before sewing. Slightly soft, wet adhesive for planar lamination of foam, sponge, name plates and electric or electronic parts.

36 mm.



Suitable for soften materials



MOUNTING & JOINING

DOUBLE SIDE EVA FOAM TAPE (FDT-WS-GREE)

Double Side EVA Foam Tape

FDT-WS-GREEN



White

General Property

- ✓ Surface: White color EVA Foam
- Adhesive: Acrylic Solvent Base
- ✓ Most like high surface energy substrate as mirror hook
- Good humidity resistance for mounting

Product Details





Adhesive Acrylic Solvent

Туре	Thickness (mm)	Product Image Width (mm)			Length (M)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
FDT-WS- GREEN KK Yellow	1.50 ±0.20	0 12 mm.	20 mm.	24 mm.	5, 10	3.0"	60 Rolls, 120 Rolls	₹ 80 °C

• Jumbo size : 1040mm x 200M

• OEM : Available on request



Applications

For fix sticking preferable performance for both indoor and outdoor apply, holding that suitable for light load hangers using in furniture, decoration, nameplates, all kinds of poster and sign.



Suitable light holding weight



Double Side PE Foam Tape

EFDT-R

Color

General Property

- ✓ Surface: Black color Polyethylene Foam
- Adhesive: Acrylic Solvent Base

Black

- High strength and durable outside mounting
- Oustanding weather and humidity resistance for mounting





Product Details

Туре	Thickness (mm)	Product Image Width (mm)			Length (M)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
EFDT-R KK Yellow	1.0 ±0.20	0 12 mm.	0 20 mm.	24 mm.	5, 10	3.0"	60 Rolls, 120 Rolls	≥ 80 °C

- Jumbo size : 1040mm x 200M
- OEM : Available on request



Applications

For high shear strength superior performance and good climate resistance for outdoor apply, high holding that suitable for high load hangers using in furniture, decoration, nameplates, all kinds of vehicles, car body molds and for holding household.



Suitable for perfect hook standing weight



Warning Tape

Color Light Yellow

Red

White



Rubber Solvent

Strength

General Property

- ✓ Surface: Hardness Polyvinyl Chloride Film
- Adhesive: Rubber Solvent Base
- Easy apply to all substrate and aggressive adhesive
- Durability PVC film and good strength in this film



Туре	Thickness (Microns)	Product Image Width (mm)	Length (M)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
FMT-LY KK Yellow FMT-W KK Yellow FMT-R KK Yellow FMT-BL KK Yellow	150 ±10	Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the system Image: Weight of the	33	3.0"	15 Rolls, 30 Rolls	₹ 70 °C

- Logroll size: 1250mm x 33M
- Size Cutting: Available on request



THAIKK

Applications

High adhesion resists abrasion, weather and chemical. Suitable for industrial and manufacturing facilities for floor marking which identifying behind in parking areas and warehouse. Durable for both indoor and outdoor using

WARNING TAPE (FMT-Y#B, FMT-W#R)

Warning Tape





Yellow with Black

White with Red

General Property

- ✓ Surface: Hazard pattern printing on Polyvinyl Chloride Film
- Adhesive: Rubber Solvent Base
- Easy apply to all substrate and aggressive adhesive
- Durability PVC film and good strength in this film





Туре	Thickness (Microns)	Product Image Width (mm)	Length (M)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
FMT-Y#B	150 ±10	Image: Weight of the second	- 33	3.0"	15 Rolls, 30 Rolls	₹ 70 °C

- Logroll size: 1250mm x 33M
- Size Cutting: Available on request



Applications

Suitable for identify lanes, aisles, hazard areas, marking tools and equipment in manufacturing facilities. High adhesion resists abrasion, weather and chemical.

Durable for both indoor and outdoor using





Surface Protection Tape

PT-CL, PTH-CL, PT-BL, PTH-BL



General Property

- Surface: Low Density Polyethylene Film
- ✓ Adhesive: Removable Acrylic Solvent
- Good scratch resistance, doesn't leave adhesive residue after peeling off
- Prevent scratches on workpieces of all materials



Туре	Thickness (Microns)	Product Image Width (mm)	Length (M)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
PT-CL, PTH-CL PT-BL, PT-BL, PTH-BL	50 ±5	48 mm. 48 mm.	30, 200	3.0"	16 Rolls, 60 Rolls	€ 0-60 °C

- Logroll size: 1250mm x 200M
- Size Cutting: Available on request



Applications

For protection on smooth surface & high surface energy; Glass, Polished Metal, Some plastic; Polyester, ABS, Rigid PVC, Polycarbonate, Acrylic, PMMA

Protection on many surfaces









Lint Remover Tape

KTE-BL, KTE-UW

Color

White (No print) / Blue

ight) White (No print) / White

General Property

- ✓ Surface: Blue or White Glassine Release Paper
- Adhesive: Acrylic Emulsion
- Convenience in a roller shape and strong sticky adhesive
- ✓ Convenient to carry and no noise, Without electricity



Acrylic Emulsion

Electricity

Product Details Product Image Thickness Length Core ID Box Туре Temp. Use (°C) (Microns) (Inch) (Rolls) (M) Width (cm) **KTE-BL** 10 cm. 15.9 cm. 96 Rolls, 5-70 °C 83 ±5 6.5 1.5" 144 Rolls **KTE-UW** 10 cm. 15.9 cm.

- Logroll size: 954mm x 6.5M, 1020mm x 6.5M
- Size Cutting: Available on request



Applications

Removal of dust, powder, tiny foreign substances remaining on clothes, chair, car cushion, carpet etc

Convenience in a roller shape



40 | Leading Tape Manufacturer



BIO TAPE (KT-BIO)

Adhesive

Rubber Solvent

Eco-friendly non-polyethylene

Віо Таре

Color Brown

General Property

- Surface: Brown Kraft Release Paper without PE laminated
- ✓ Adhesive: Rubber solvent base
- Eco-friendly by non-polyethylene laminated on kraft paper and good adhesion
- It is possible to easy tear by hand



Туре	Thickness (Microns)	Product Image Width (mm)	Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
KT-BIO KK Green	150 ±10	48, 60, 72 mm.	30 Yd and others	3"	18 Rolls	-20-70 ℃

- Jumbo size: 1250mm x 100M
- Size Cutting: Available on request



Applications

Eco-Friendly, Suitable for cartons sealing and paper splicing of a variety of materials which a good for use in normal ambient temperature and suitable for use in household, office and industry.


Suitable for use in household, office, and industry





CLOTH TAPE (CT)

Cloth Tape

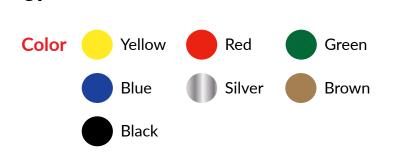



General Property

- ✓ Surface: Color PE Laminated Cloth 70mesh film
- ✓ Adhesive: Synthetic Rubber Base
- Easy to tear Various colors for different working fields
- ✓ Waterproof and durable

Product Details



Туре	Thickness (Microns)	Product Image Width (mm)	Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
KK Orange	270 ±15	24 mm. 36 mm. 48	8 Yd, 9 Yd and others	1.5", 3"	50 Rolls	-5 to 80 °C

- Jumbo size: 1060mm x 600M
- Size Cutting: Available on request



Applications

For the general usings such as sealing, documenting and multipurpose applications that require extra strength.

Extra Strength



OPP No Noise OPTNS

Color

Clear

General Property

- Surface: Biaxial Oriented Polypropylene Film
- Adhesive: Acrylic Emulsion
- ✓ Noiseless silent tape, It is designed to be quiet when unwind it from the roll, will not disturb when packing

Product Details





Adhesive

Acrylic Emulsion

Туре	Thickness (Microns)	Product Image Width (mm)	Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
KK Cream	45 ±2	48 mm.	45,	3"		€ 0-70 °C
KK Brown	48 ±2	48 mm.	50, 100	3	72 Rolls	

- Logroll size: 1280mm x 50YD, 1280mm X 100YD
- Size Cutting: Available on request



Applications

Suitable for Multi purpose carton sealing, it can be used for removals, shipping and storage, shipping box and suitable for work at night or when others is resting.

Suitable for work at night





OPP TAPE 36MIC (OPT-36MIC)

OPP Tape (36MIC)





Color

OPT-36mic

General Property

- Surface: Biaxial Oriented Polypropylene Film
- ✓ Adhesive: Acrylic Emulsion

Clear

- Suitable for use in Room Temperature and Low Temp
- Thin grade, Economic price

Product Details

Туре	Thickness (Microns)	Product Image Width (mm)	Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
OPT-36mic	36 ±2	48 mm.	45, 50, 100	3"	72	0-70 ℃

• Size Cutting: Available on request



Applications

Suitable for general carton sealing, suitable for low weight~1kg, Use in stationary, household, office, and light shipping in factory.

Suitable For Low Weight~1kg







Washi Tape Cute Masking Tape

DISNEP

General Property

- ✓ Adhesive: Acrylic Emulsion
- Strongly sticky
- High quality product
- Cute design, clear pattern
- Easy to tear, no scissors needed
- Easy to take in everywhere

Applications

Decorating your planner or bullet journal, wrapping gifts, seal your envelopes, scrapbooking or arts and crafts



Suitable for Stationery





WASHI TAPE (CUTE MASKING TAPE)

Washi Tape Cute Masking Tape

Disney Series



Trues	Thickness	Product Image		Della (Devr	Boxes/Carton
Туре	(mm)	Model Name	Size/Roll	Rolls/Box	Boxes/Carton
Disney Series	0.080 ±0.010		15mm x 2M	4	100



Product Details

Туре	Thickness (mm)	Product Image Model Name	Size/Roll	Rolls/Box	Boxes/Carton	
Type	(mm)		Size/Roll	Rolls/Box	Boxes/Carton	



NEW PRODUCTS

WASHI TAPE (CUTE MASKING TAPE)

Washi Tape Cute Masking Tape

Mascute Series



Туре	Thickness (mm)	Product Image Model Name	Size/Roll	Rolls/Box	Boxes/Carton
Mascute Series	0.080 ±0.010	Final of the second	15mm x 5M	1	100



Washi Tape Cute Masking Tape

Fancy Series



Туре	Thickness	Product Image	Size/Roll	Rolls/Box	Boxes/Carton
Туре	(mm)	Model Name	Size/ Koli	KUIIS/ DUX	Boxes/Carton
Fansy Series	0.080 ±0.010	With the second sec	15mm x 2M	4	100



Washi Tape Cute Masking Tape

Verticaz Series



Туре	Thickness (mm)	Product Image Model Name	Size/Roll	Rolls/Box	Boxes/Carton
Verticaz Series	0.080 ±0.010	The provide the pro	3 Sizes in 1 Box 5mm x 2M 15mm x 2M 30mm x 2M	5	100



Clear Printed Tape Cute Cartoon Tape

SNEX

General Property

- The high-grade adhesive ensures smooth and strong sealing without bunching
- Printed with characters on the adhesive side for ease of application
- Increasing in customer friendly, brand recognition and awareness

Applications

Created the ideal for packing and shipping and for design decorate packaging. It offers good value for your money and make your storing and packing easier



PET Printed **TAPE**

เทปใสพิมพ์ลาย ติดแน่น ^{ไม่หลุดสอกง่าย}

Suitable for Stationery and Packing





CLEAR PRINTED TAPE

Clear Printed Tape

Cute Cartoon Tape

Disney Series



Туре	Product Image Model Name	Size/Roll	Rolls/Pack	Boxes/Carton
The Aristocats Series	<image/> <section-header></section-header>	24mm x 2M	1	100





Product Details

Туре	Product Image Model Name	Size/Roll	Rolls/Pack	Boxes/Carton
101 Dalmatians Series	<image/> <section-header></section-header>	24mm x 2M	1	100
Emoji Series	<image/> <section-header></section-header>	24mm x 2M	1	100

CLEAR PRINTED TAPE

NEW PRODUCTS

Leading Tape Manufacturer | 53



CLEAR PRINTED TAPE

Clear Printed Tape

Cute Cartoon Tape



Туре	Product Image Model Name	Size/Roll	Rolls/Pack	Boxes/Carton
Sunshine Day Series	<image/>	24mm x 2M	1	120
Animal Gift Series	<image/>	48mm x 3M		



NEW PRODUCTS

Nano Magic Tape Clear Double-Sided Tape

General Property

- Sticky fastener tape
- ✓ Non-toxic, recyclable, washable and Eco-friendly
- Double-sided adhesives with nano hybrid technology design

NON KONTOXIC Non-Toxic

Eco-Friendly

Nano Hybrid Technology

Product Details

Туре	Thickness (mm)	Product Image Model Name	Size/Roll	Unit/Pack	Boxes/Carton
Premium Packaging			21mm x 2M	1	72
Standard Packaging	2.00 ±0.02	INNO MACIO LAPE Indivisiona de la companya de la compan de la companya de la comp	30mm x 3M	1	50



Applications

Applied on any clean smooth surfaces (walls, hard floor, window, wardrobe plastics, glasses and more). It can be used in any area such as home, office, cars, school, arts, crafts, carpets, furniture and other crafting

Suitable for High Adhension Purpose





SCREEN REPAIR TAPE

Screen Repair Tape



General Property

- ✓ Structure : Fiberglass, Solvent adhesive
- Strongly sticky
- Produced from high quality raw material
- Save cost for buy new window screen

Product Details



Туре	Thickness (Microns)	Product Image Model Name	Size/Roll	Unit/Pack	Boxes/Carton
Standa Packag	370 +70		5cm x 2M	1	100

Applications

Specially used to repair the broken window screen, It is a good choice for preventing mosquitoes, pests from outside external environmental.

Suitable for repair the broken window screen



NANO MAGIC TAPE

Self Fusion Tape High Voltage Self-Fusing Tape EPRT

✓ Structure : EPR (Ethylene Propylene Rubber) based

Prevent moisture resistant in contact area

Resistant to temperatures up to 130°C

General Property

Product Details

Self adhesive insulation tape



Up To 130°C **Resistant To**

Temperatures

Prevent Moisture

Туре	Thickness (mm)	Product Image Width (mm)	Length (Ft)	Flammability	Box (Rolls)	Operating Temp. (°C)
EPRT	0.760 ±0.076	19 mm.	6, 30	Self-fusing	1	90 ℃



Applications

Suitable for wrapping wires inside water pumps, motors, splicing, repair of electrical wire and solid dielectric cables

Maximum **Breakdown voltage**





Note

	Thai KK Gree
	innovatio

One-Stop Solution Provider

SHOP ONLINE

Easy shopping, Anytime Anywhere!

WWW.THAIKK.CO.TH



Quality Over Price

명 1

THAIKK

Delivery In 1 day



Consulting Service



Customized Design Service

ENDLESS VALUE EVERY DAY
EASY ONLINE ORDERING





Thai KK, we are a manufacturer who are produce and supply the high quality adhesive tape recognized by both domestic and international customers

f thaikk.co.th

🖤 @thaikk

(d) @thaikk_lifestyle

THAI KK INDUSTRY Co., Ltd. (Head office)

29/1 Moo.5 Soi Thummasiri, Debaratana Road, Tumbol Bangsaotong, Amphur Bangsaotong, Samutprakarn 10570 Thailand

Tel: +662 338 4900 **Fax:** +662 338 4905

SHOP ONLINE



www.thaikk.co.th