

## 24200 Series


### Multiplex Pushing Eye

This product is designed to be threaded onto the lead end of a group of either triplex or quadplex cables so that they can be pushed through short lengths of ducting. The basic pushing eye comes with only the body and a shoulder bolt. There are several different attachments which can be threaded onto the bolt and these must be purchased separately.

These include some of the accessories used with our duct rodders such as the pulling eye, the clevis end and the roller guide as well as a standard eye nut. Any of these can act as a leader for the pushing eye.

Each size of pushing eye can be used to attach to different groups of cable. Because the cables can be in different quantities and diameters, the range for each pushing eye is determined by the diameter around the group of cables. This information is available on the data supplied by the cable manufacturer or it can be measured using the diagram below as a guide.

The 24200-KT1 is a kit comprising one of each size of pushing eye plus one each of the leaders shown in the photograph.

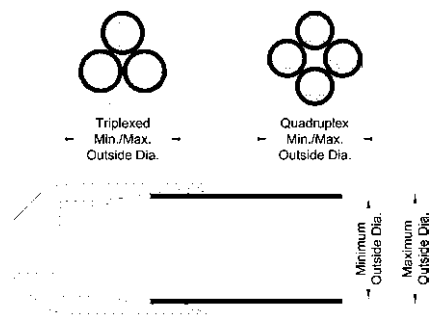

| Part No.  | Minimum Outside Cable Diameter | Maximum Outside Cable Diameter | Weight  |
|-----------|--------------------------------|--------------------------------|---------|
| 24200-KT1 | 1.00"                          | 1.59"                          | 2.20 lb |
| 24200-010 | 1.00"                          | 1.22"                          | 0.63 lb |
| 24200-020 | 1.22"                          | 1.41"                          | 0.67 lb |
| 24200-030 | 1.41"                          | 1.59"                          | 0.73 lb |

| Part No.  | Leader Attachments |
|-----------|--------------------|
| 57150-004 | Roller Guide       |
| 57160-004 | Clevis End         |
| 57120-004 | Pulling Eye        |
| 90024-037 | Eye Nut            |