

Type:

Model:

**MIRAGE Integrated LED Uplight Fixture**

**SPECIFICATIONS**

**VOLTAGE:**  
12V AC/DC.

**HOUSING:**  
Cast aluminum with removable 3" shroud.  
Optional 6" shroud available.

**FINISH:**  
Architectural bronze. Custom powder coated colors available.

**LENS:**  
Tempered glass.

**MOUNTING:**  
Threaded with 1/2" NPT. Heavy-duty composite stake included. May be mounted into threaded hubs in junction boxes or mounting accessories

**WIRING:**  
Pre-wired with a five-foot pigtail of 18/2 cable.

**WARRANTY:**  
Ten years.




Shown with optional 6" shroud




Optional 6" shroud 489849

The Mirage uplight features an integrated LED source available in 3, 6 or 10 watts. 2700K, 3000K or 5000K options. 25, 40 and 60-degree beam spreads.

**DIMENSIONS:**

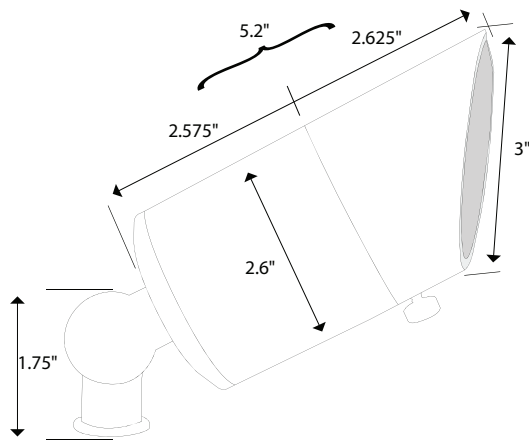

With Standard 3" Shroud

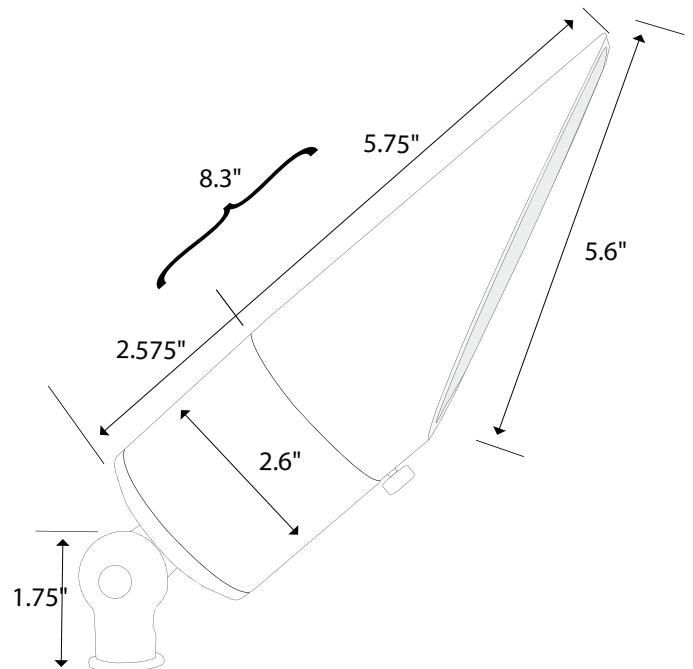

With Optional 6" Shroud

LED LAMP SPECIFICATIONS

**LAMP TYPE:**

Integrated LED.

**OPTICS:**

Integral optics providing available beam spreads from 25° to 60°.

**COLOR TEMPERATURES:**

Color temperature options provide the following qualities: 2700K, 3000K or 5000K.

**FIXTURE ORDERING INFORMATION**

To order a fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 489801-MS



MODEL	WATTAGE	VOLT AMPS	BEAM SPREAD	COLOR TEMP	LUMENS	EFFICACY	CRI	MOUNTING
489801 MIRAGE 6W 25° 2700K	6W	7.47 VA	25°	2700K	516 lm	86 lm/W	80	<b>MS</b> Heavy-duty Slotted Mounting Stake (incl.) - 490034
489802 MIRAGE 6W 40° 2700K	6W	7.47 VA	40°	2700K	516 lm	86 lm/W	80	<b>SH</b> Extended 6" Shroud - 489849
489803 MIRAGE 6W 60° 2700K	6W	7.47 VA	60°	2700K	516 lm	86 lm/W	80	<b>ATM</b> Aluminum Tapered Surface Mount - 490187
489806 MIRAGE 6W 25° 3000K	6W	7.38 VA	25°	3000K	546 lm	91 lm/W	80	<b>AGM</b> Aluminum Gutter Mount - 490188
489807 MIRAGE 6W 40° 3000K	6W	7.38 VA	40°	3000K	546 lm	91 lm/W	80	
489808 MIRAGE 6W 60° 3000K	6W	7.38 VA	60°	3000K	546 lm	91 lm/W	80	
489811 MIRAGE 10W 25° 2700K	10W	11.70 VA	25°	2700K	780 lm	78 lm/W	80	<b>R6</b> Aluminum 6-In Riser - 490181
489812 MIRAGE 10W 40° 2700K	10W	11.70 VA	40°	2700K	780 lm	78 lm/W	80	<b>R12</b> Aluminum 12-In Gutter Mount - 490182
489813 MIRAGE 10W 60° 2700K	10W	11.70 VA	60°	2700K	780 lm	78 lm/W	80	
489816 MIRAGE 10W 25° 3000K	10W	11.51 VA	25°	3000K	800 lm	80 lm/W	80	<b>R24</b> Aluminum 24-In Gutter Mount - 490183
489840 MIRAGE 10W 60° 5000K Uplight	10W	11.51 VA	60°	5000K	900 lm	90 lm/W	80	

LED LAMP SPECIFICATIONS

**LAMP TYPE:**  
Integrated LED.

**OPTICS:**  
Integral optics providing available beam spreads from 25° to 60°.

**COLOR TEMPERATURES:**  
Color temperature options provide the following qualities: 2700K, 3000K or 5000K.

**FIXTURE ORDERING INFORMATION**

To order a fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 489801-MS



MODEL	WATTAGE	VOLT AMPS	BEAM SPREAD	COLOR TEMP	LUMENS	EFFICACY	CRI	MOUNTING
489851 MIRAGE 3W 25° 2700K Uplight	3W	4.58 VA	25°	2700K	294 lm	98 lm/W	80	<b>MS</b> Heavy-duty Slotted Mounting Stake (incl.) - 490034 <b>SH</b> Extended 6" Shroud - 489849 <b>ATM</b> Aluminum Tapered Surface Mount - 490187 <b>AGM</b> Aluminum Gutter Mount - 490188 <b>R6</b> Aluminum 6-In Riser - 490181 <b>R12</b> Aluminum 12-In Gutter Mount - 490182 <b>R24</b> Aluminum 24-In Gutter Mount - 490183
489852 MIRAGE 3W 40° 2700K Uplight	3W	4.58 VA	40°	2700K	294 lm	98 lm/W	80	
489853 MIRAGE 3W 60° 2700K Uplight	3W	4.58 VA	60°	2700K	294 lm	98 lm/W	80	
489856 MIRAGE 3W 25° 3000K Uplight	3W	4.59 VA	25°	3000K	315 lm	105 lm/W	80	
489857 MIRAGE 3W 40° 3000K Uplight	3W	4.59 VA	40°	3000K	315 lm	105 lm/W	80	
489858 MIRAGE 3W 60° 3000K Uplight	3W	4.59 VA	60°	3000K	315 lm	105 lm/W	80	