
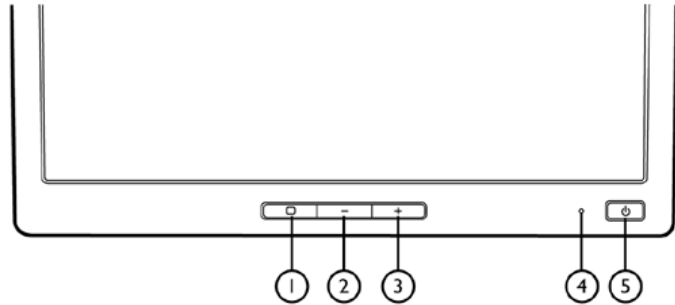


Overview

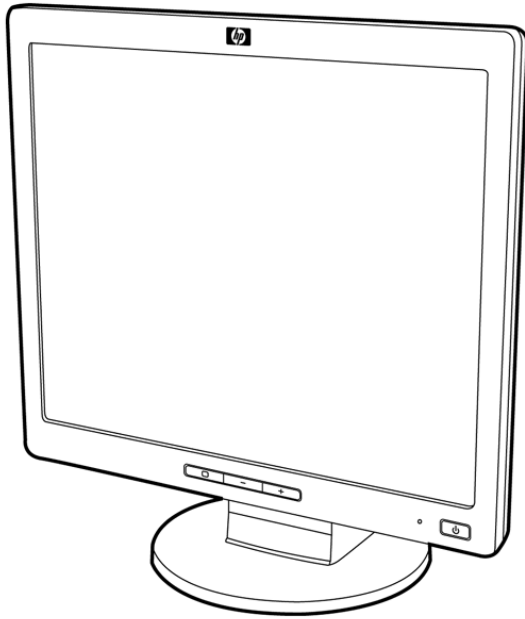

1. Button 1: Menu selection
2. Button 2: Menu "-" selector button
3. Button 3: Menu "+" selector button
4. Button 4: Power LED
5. Button 5: Power button

Models

PX849AA#ABA

HP Care Pack Services

4 Year Next Business Day Warranty Extension

5 Year Next Business Day Warranty Extension

U7934E

U7935E

Technical Specifications

Panel	Type	17-inch Active Matrix TFT (thin film transistor)	
	Viewable Image Area (diagonal)	17 in (43.2 cm)	
	Screen Opening (W x H)	13.3 x 10.6 in (33.8 x 27.0 cm)	
	Viewing Angle (typical)*	140 degrees horizontal/130 degrees vertical (10:1 minimum contrast ratio)	
	Brightness (typical)*	300 nits (cd/m ²)	
	Contrast Ratio (typical)*	500:1	
	Response Rate	5 ms	
	Pixel Pitch	0.264 mm	
	Backlight Lamp Life (to half brightness)	50K hours	
* All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.			
On Screen Display (OSD) Controls	Buttons or Switches	3-button OSD (menu, minus, plus); power on/off	
	Languages	English, French, German, Spanish, Italian, Dutch, Simplified Chinese	
	User Controls		Image Control (auto, horizontal, vertical)
			Positioning (vertical and horizontal)
			Color Temperature (6500k, 9300k, Custom)
			Brightness
			Contrast
	Clock, Clock Phase		
	Monitor Management (power saver, sleep)		
	Factory Reset		
Signal Interface/Performance	Horizontal Frequency	30 to 83 kHz	
	Vertical Frequency	50 to 76 Hz	
	Graphics Controller	Genesis, MStar, Realtec	
	Native Resolution	1280 x 1024 @ 60 Hz (recommended)	
	Maximum Resolution (Digital)	N/A	
	Preset VESA Graphic Modes (non-interlaced)		1280 x 1024 @ 60 Hz and 75 Hz
			1024 x 768 @ 60 Hz, 70 Hz, and 75 Hz
			1152 x 870 @ 75 Hz (Mac)
			1152 x 900 @ 76 Hz (Sun)
			832 x 624 @ 75 Hz (Mac)
			800 x 600 @ 60 Hz, 72 Hz, and 75 Hz
		720 x 400 @ 70 Hz	
	640 x 480 @ 60 Hz, 72 Hz, and 75 Hz		
Maximum Pixel Clock Speed	140 MHz		
User Programmable Modes	Yes, 10		

Technical Specifications

	Anti-Glare	Yes	
	Anti-Static	Yes	
	Default Color Temperature	6500 degrees Kelvin	
Video Input	Plug and Play	Yes	
	Input Signal	15 pin D-sub (Analog VGA)	
	Input Impedance	75 ohms (2 % value change allowed)	
	Sync Input	TTL separate synch	
	Video Cable	Detachable 15-pin D-sub mini connector	
	Video Cable Length	70.8 in (1.8 m)	
Power	Input Power	100 ~ 240 VAC	
	Nominal Current	< 0.50 Ampere	
	Frequency	50 ~ 60 Hz	
	Typical Power Consumption	33 watts	
	Maximum	< 37 watts	
	Power Saving	< 2 watts	
	Power Cable Length	74.8 in (1.9 m); detachable	
Mechanical	Dimensions (H x W x D)	Unpacked with stand	15.6 x 14.8 x 8.0 in (39.5 x 37.5 x 20.3 cm)
		Display Head only	13.0 x 14.8 x 2.5 in (33.0 x 37.5 x 6.4 cm)
		Packaged	17.3 x 18.0 x 6.9 in (44.0 x 45.6 x 17.5 cm)
	Weight	Unpacked	10.1 lb (4.6 kg)
		Packaged	13.4 lb (6.1 kg)
	Tilt Range	-5 to +30 degrees vertical tilt	
	Swivel Range	None	
	Height Adjustable	No	
	Pivot Rotation	No	
	Base and Stand	Detachable	
Environmental	Temperature – Operating	50° to 95° F (10° to 35° C) non-condensing	
	Temperature – Non-operating	-4° to 140° F (-20° to 60° C)	
	Humidity – Operating	20% to 80% non-condensing	
	Humidity – Non-operating	5% to 90%	
	Altitude – Operating	0 to 12,000 ft (0 to 3,658 m)	
	Altitude – Non-operating	0 to 40,000 ft (0 to 12,100 m)	
Environmental Data	Eco-Label Certifications and Declarations	This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:	
		<ul style="list-style-type: none"> ● ENERGY STAR® ● US Federal Energy Management Program (FEMP) ● IT ECO declaration 	

Technical Specifications

- TCO 03
- Taiwan Green Mark
- CECP
- EU Flower (2001/686/EC & 2001/687/EC)
- GEEA

Energy Consumption (in accordance with ENERGY STAR® test method)	AC Input Voltage at 100 VAC +/- 5 VAC, 50 Hz +/- 3 Hz	AC Input Voltage at 115 VAC +/- 5 VAC, 60 Hz +/- 3 Hz	AC Input Voltage at 230 VAC +/- 5 VAC, 50 Hz +/- 3 Hz
	Normal Operation	27.9 watts	28 watts
Sleep	1.83 watts	1.75 watts	1.78 watts
Off	0.67 watts	0.44 watts	0.47 watts
Heat Dissipation*	100 VAC, 50 Hz	115 VAC, 60 Hz	230 VAC, 50 Hz
Normal Operation	95.42 BTU/hr	95.76 BTU/hr	95.08 BTU/hr
Sleep	6.26 BTU/hr	5.99 BTU/hr	6.09 BTU/hr
Off	2.29 BTU/hr	1.51 BTU/hr	1.61 BTU/hr

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Ergonomics The monitor meets the ergonomic requirement of EN-ISO 13406-2 for flat panel displays.

Additional Information This product is in compliance with the Restrictions of Hazardous Substances (RoHS) Directive, 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive, 2002/96/EC.

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

Display meets the requirement for low frequency electromagnetic fields per TCO and prEN50279 A/B/C.

Packaging Materials

- Corrugated Carton – 0.650 kg
- Bag LDPE – 0.030 kg
- Film PP – 0.165 kg

Material Usage This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons

Technical Specifications

- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: www.hp.com/recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment: Global Citizenship Report
www.hp.com/hpinfo/globalcitizenship/gcreport/index.html
Eco-label certifications
www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html
ISO 14001 certificates:
www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html

Technical Specifications

Options	<p>HP LCD Speaker Bar – Part number: EE418AA Powered directly by the monitor or PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP flat panel monitors. Features include dual speakers with full sound range and an external jack for headphones. Sold separately. For more information, refer to the product's QuickSpec.</p> <p>HP Compaq dc7800 Series Integrated Work Center Stand – Part number: GN783AA Allows mounting of a 17- or 19-inch HP LCD monitor and an HP Compaq dc7800 Ultra-slim Desktop PC or HP thin client on a single stand for the convenience of an "all-in-one" form factor. Sold separately. For more information, refer to this product's QuickSpec document.</p> <p>HP LCD Monitor Quick Release – Part number EM870AA* An easy-to-use, VESA-compliant, flat panel monitor mounting solution that allows you to quickly and securely attach a flat panel monitor to a variety of stands, brackets, arms or wall mounts. For more information, refer to this product's QuickSpec document.</p>
----------------	--

* The HP Quick Release has been designed to support a maximum of up to 24 lbs (10.9 kg) depending upon the mounting configuration used. Please note this is a total weight limit for all devices mounted, i.e. the combined weight of the monitor and a second device such as the HP Thin Client cannot exceed 24 pounds. Because mounting surfaces vary widely and the final mounting method and configuration may vary, mounting fasteners are not supplied (other than the VESA-compliant screws). HP recommends that you consult with a qualified engineering, architectural or construction professional to determine the appropriate type and quantity of mounting fasteners required for your application and to ensure that your mounting solution is properly installed to support applied loads.

Other	<p>Accessories Included Detachable VGA cable, detachable AC power cord, documentation kit, and user CD.</p> <p>Software HP Display LiteSaver feature allows you to schedule Sleep mode at preset times to help protect the monitor against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor. HP Display Assistant is a software utility that allows monitor adjustment and color calibration using the Display Data Channel Command Interface (DDC/CI) protocol of the connected PC.</p> <p>User Guide Languages English, Brazilian Portuguese, French, LA Spanish, Korean, Simplified Chinese, Traditional Chinese, Japanese, Danish, Dutch, Finnish, German, Italian, Norwegian, Swedish, Greek, Polish, Russian, Slovenian, Turkish</p> <p>Warranty Languages</p> <table border="0"> <tr> <td>Americas</td> <td>English</td> </tr> <tr> <td>LA</td> <td>Spanish, Brazilian Portuguese</td> </tr> <tr> <td>EMEA</td> <td>English, Danish, Dutch, Finnish, European French, German, Italian, Norwegian, Castilian Spanish, Swedish</td> </tr> <tr> <td>Asia/Pacific</td> <td>English, Bahasa, S. Chinese, T. Chinese, Korean, Japanese, Chinese</td> </tr> </table> <p>Color Carbonite/Silver</p> <p>VESA External Mounting Yes (Standard 4 hole pattern, 100 mm)</p> <p>Kensington Lock-ready Yes</p>	Americas	English	LA	Spanish, Brazilian Portuguese	EMEA	English, Danish, Dutch, Finnish, European French, German, Italian, Norwegian, Castilian Spanish, Swedish	Asia/Pacific	English, Bahasa, S. Chinese, T. Chinese, Korean, Japanese, Chinese
Americas	English								
LA	Spanish, Brazilian Portuguese								
EMEA	English, Danish, Dutch, Finnish, European French, German, Italian, Norwegian, Castilian Spanish, Swedish								
Asia/Pacific	English, Bahasa, S. Chinese, T. Chinese, Korean, Japanese, Chinese								

Certification and Compliance	ISO 13406-2 pixel defect guidelines, CISPR, VCCI, CSA (Canada), ACA (Australia), TUV and GS Mark (German ergonomic), BSMI (Taiwan), CCC (China), MIC (South Korea), NOM (Mexico), Eastern European approvals, CE Marking, FCC approval, ENERGY STAR® qualified, TCO '03 (emissions, ergonomics, environment), Microsoft® Windows® certified (Microsoft® Windows® 2000, Microsoft Windows XP, and Windows Vista®), UL listed, GOST (Russia), SASO (Saudi Arabia)
-------------------------------------	---

Technical Specifications

Compatibility	Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.
Service and Warranty	Three years parts, labor, and on-site service. 24-hour, 90-day, toll-free technical support. Replacement options may include second business day on-site service, or next business day direct replacement, at HP's sole discretion.* With direct replacement, HP will ship a replacement display product directly to you. Using the prepaid shipping labels provided, return your failed display to HP in the same packaging as the replacement. Certain restrictions and exclusions apply. For details see your product warranty or contact HP Customer Support. <i>* Service levels and response times for HP Care Packs may vary depending on your geographic location. Restrictions and limitations apply. For details, visit www.hp.com/go/carepack.</i>

© 2008 Hewlett-Packard Development Company, L.P.

Microsoft and Windows are trademarks or registered trademarks of Microsoft Corporation in the U.S. and other countries. Windows Vista is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries. ENERGY STAR is a registered mark owned by the U.S. government.

HP shall not be liable for technical or editorial errors or omissions contained herein. The information is provided as is without warranty of any kind and is subject to change without notice. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.