


FLANGE KIT INSTALLATION

The flange kit allows seamless installation of the Whynter MIM-14231SS which gives a greater degree of personalized application. This is an optional accessory, sold separately. The flange kit is used for a consistent smooth surface and additional secure fastening by screwing the flange to the cabinet.


CAUTION: The flange must not be used for support the weight of the unit. Adjust the feet to level the unit and make the lower edge of flange not touch the ground.

Model Number: **MIM-FK-14231**

FLUSH TO CABINET:

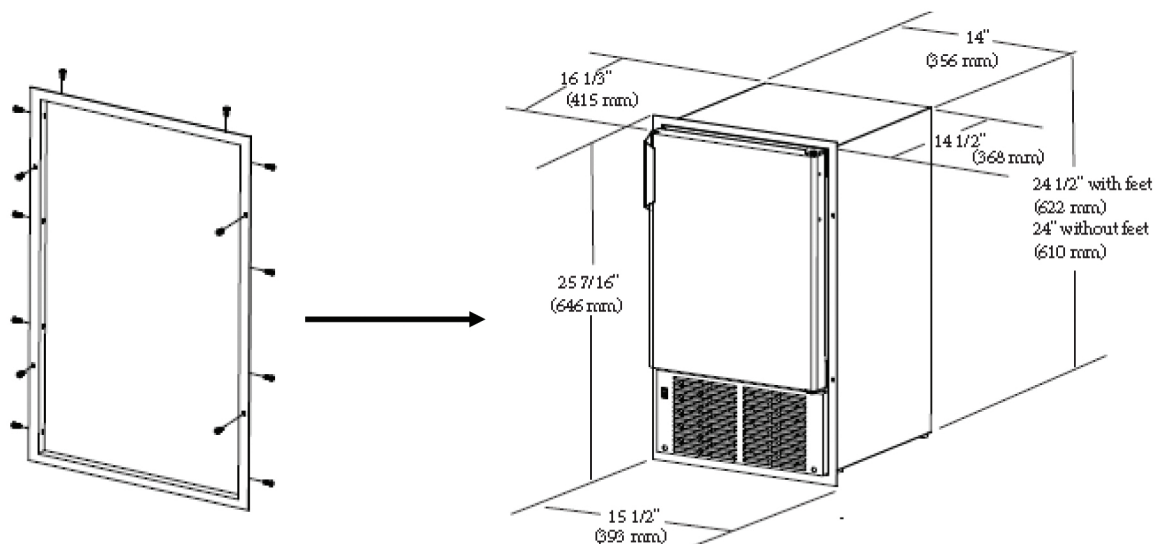

FLUSH TO DOOR:

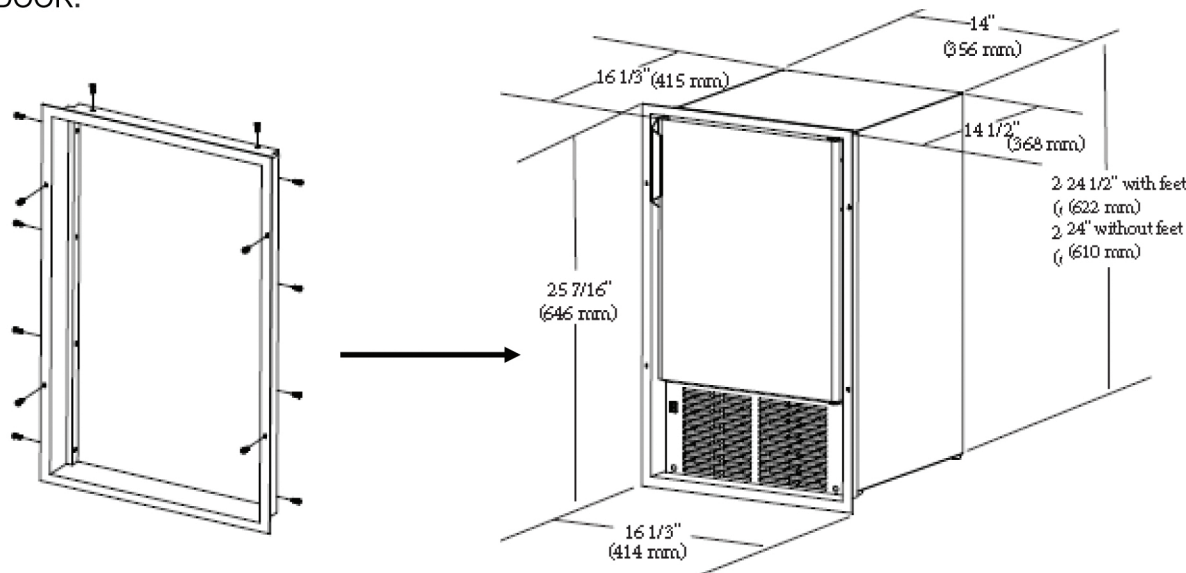

INSTALLATION

1. Remove the flange and screws from the shipping carton.
2. Using a flathead screwdriver, carefully remove the ten pre-installed decorative plugs from screw holes located on top, left and right panels of the ice maker.
3. Put the flange through the front of the icemaker on the cabinet.
4. Adjust the feet to make sure the flange NOT touch the ground.
5. Align the flange squarely with the unit. Screw the flange tight with the cabinet of icemaker.
6. Move the icemaker with flange to the cabinet. Icemaker must sit on a level surface.
7. Screw the flange to the kitchen cabinet if the icemaker is installed in a moving environment for anti-shock installation.