

CITY

22-Mar.-2019

1.6

LED 13W | 220-240VAC | 50-60Hz | AC-PCB 3-step low flicker | incl. PS | phase cut dim

CE P44 0,3m P

white texture

115184W_

LIGHT COLOUR

2700K | >90CRI | 770lm

3

3000K | >90CRI | 840lm

5

2.6

LED 18W | 220-240VAC | 50-60Hz | AC-PCB 3-step low flicker | incl. PS | phase cut dim

CE P44 0,3m P

white texture

115284W_

LIGHT COLOUR

2700K | >90CRI | 1160lm

3

3000K | >90CRI | 1260lm

5

3.5

LED 32W | 220-240VAC | 50-60Hz | AC-PCB 3-step low flicker | incl. PS | phase cut dim

CE P44 0,3m P

white texture

115384W_

LIGHT COLOUR


2700K | >90CRI | 1730lm

3


3000K | >90CRI | 1850lm

5


①



③

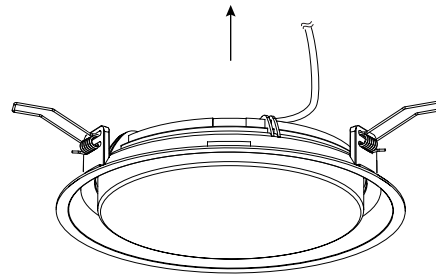

DIMENSIONS

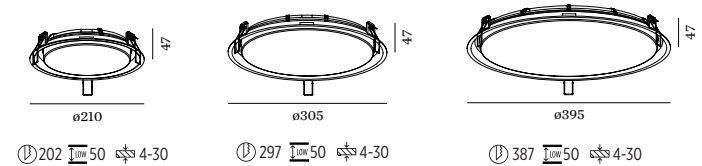

CITY 1.6


CITY 2.6

CITY 3.5

MOUNTING INSTRUCTION


① Make a hole in the ceiling according to the prescribed dimensions.

② **POWER CONNECTION**
integrated power supply
connect directly to 220-240VAC



③ Turn the springs and insert the fixture in the ceiling hole

IP20



IP RATING when installed.
(Fixture is IP20 for the recessed part & IP44 at the visible side)

The light source of the integrated LED is not replaceable;
When the light source reaches its end of life the whole luminaire should be replaced.



Caution, risk of electric shock



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

Wever & Ducré bvba Spinnerijstraat 99/21 8500 Kortrijk

**INSTALLATION
INSTRUCTIONS**