

STAKE

16-Jul.-2019

1.0

LED 8W | 220-240VAC | 50-60Hz | PCB 3-step | incl. PS | phase-cut dim

CE IP54 0.3m 0-90°

3000K | >80CRI | 480lm | 1m cable
dark grey texture

727174D4

OPTIONAL
groundspike
snoot

90013106
90019004

2.0

LED 8W | 220-240VAC | 50-60Hz | PCB 3-step | incl. PS | phase-cut dim

CE IP54 0.3m 0-90°

3000K | >80CRI | 480lm
dark grey texture

727374D4

ALWAYS USE


base 200
base 400

910042D0
910044D0


OPTIONAL
groundspike
snoot

90013107
90019004


OPTIONAL, (ORDER SEPARATELY)
snoot dimensions




OPTIONAL, (ORDER SEPARATELY)
STAKE 1.0 - groundspike dimensions




OPTIONAL, (ORDER SEPARATELY)
STAKE 2.0 - groundspike dimensions




base 400 dimensions




base 200 dimensions




STAKE 1.0



STAKE 2.0

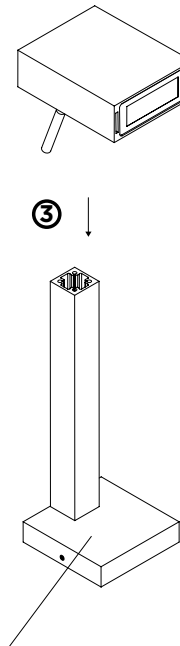

Base plate not
needed when using
a groundspike




* DO NOT COVER BASE (moss, bark, ...).
Permanent moisture & possible chemical processes from eg.
fertilization might lead in some combinations to a corrosive reaction.



① ↓



① ↓



DIMENSIONS




MOUNTING INSTRUCTION

- Fix the base plate or base on the ground by using the screws. In case of use with an optional groundspike or on a base, remove the base plate with the side screws and fix directly on the previewed place on the groundspike or base.

POWER CONNECTION

- Exterior: WATERPROOF Connection



- Attach the STAKE to the base

- OPTIONAL : mount the SNOOT on the STAKE and lock it with two allen screws.



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

Wever & Ducre bvba Spinnerijstraat 99/21 8500 Kortrijk

**INSTALLATION
INSTRUCTIONS**