


100R15

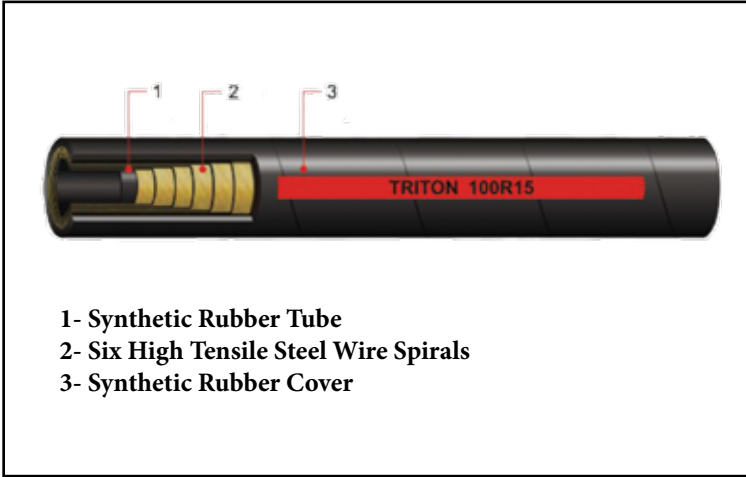

- 1- Synthetic Rubber Tube
- 2- Six High Tensile Steel Wire Spirals
- 3- Synthetic Rubber Cover

Tube: Oil resistant, synthetic rubber

Reinforcement: 3/4" and 1" - four spiral wires; 1" to 1-1/2" - six spiral wires

Cover: Oil and weather resistant synthetic rubber

Temperature: -40° F / +212° F, Intermittent use up to 250° F

Application: Petroleum based hydraulic fluid, gasoline, water, diesel fuels, lubricating oils, glycol, mineral oils, and more

Termination: 400 and 600 series, non skive, 1-piece fitting

Key Note: 6,000 PSI constant pressure, high impulse cycle

Part Number	Hose I.D.	Hose O.D.		Max Working Pressure (psi)	Minimum Burst Pressure (psi)	Minimum Bend Radius		Weight (lbs/ft)	Termination
	(in)	(in)	(mm)			(in)	(mm)		
100R15-12-4W	3/4"	1.28	32.5	6,000	24,000	11	280	1.09	400 series/1-piece
100R15-16-4W	1"	1.54	39.2	6,000	24,000	13.4	340	1.46	400 series/1-piece
100R15-16	1"	1.64	41.7	6,000	24,000	12.99	330	1.74	600 series/1-piece
100R15-20	1-1/4"	1.97	50	6,000	24,000	18.1	460	2.40	600 series/1-piece
100R15-24	1-1/2"	2.30	58.5	6,000	24,000	22.05	560	3.02	600 series/1-piece