


Hydraulic Hoses

ISC

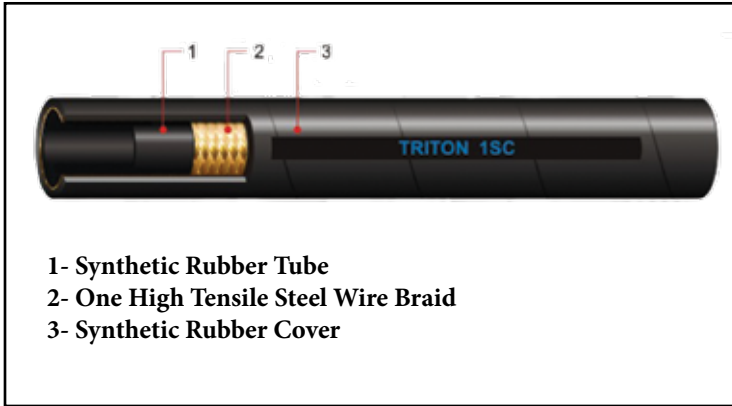

- 1- Synthetic Rubber Tube
- 2- One High Tensile Steel Wire Braid
- 3- Synthetic Rubber Cover

Tube: Oil resistant, synthetic rubber

Reinforcement: one braid of high tensile steel wire

Cover: Oil and weather resistant synthetic rubber

Temperature: -40° F / +212° F, Intermittent use up to 250° F

Application: Petroleum based hydraulic fluid, gasoline, water, diesel fuels, lubricating oils, glycol, mineral oils, and more

Termination: 200 series, bite to wire, 1-piece fitting

Key Note: compact one wire braid, high flexibility and excellent bend radius

Part Number	Hose I.D.	Hose O.D.		Max Working Pressure	Minimum Burst Pressure	Minimum Bend Radius		Weight	Termination
	(in)	(in)	(mm)			(psi)	(psi)		(in)
ISC-12	3/4"	1.05	26	1,520	6,080	3.94	100	0.31	200 series/1-piece
ISC-16	1"	1.31	34.9	1,280	5,120	6.30	160	0.42	200 series/1-piece
ISC-20	1-1/4"	1.61	41	910	3,640	16.54	420	0.57	200 series/1-piece
ISC-24	1-1/2"	1.95	49.6	725	2,900	19.69	500	0.82	200 series/1-piece
ISC-32	2"	2.52	64	580	2,320	24.80	630	1.14	200 series/1-piece