



# BV2-GRS3/GRS6 SERIES

2-Way - Pancake Body Style - Direct Mount - Dual Pattern - Full Port

Carbon Steel & 316 Stainless Steel

Sizes: 1/2" thru 5"

## BV2-GRS3/GRS6

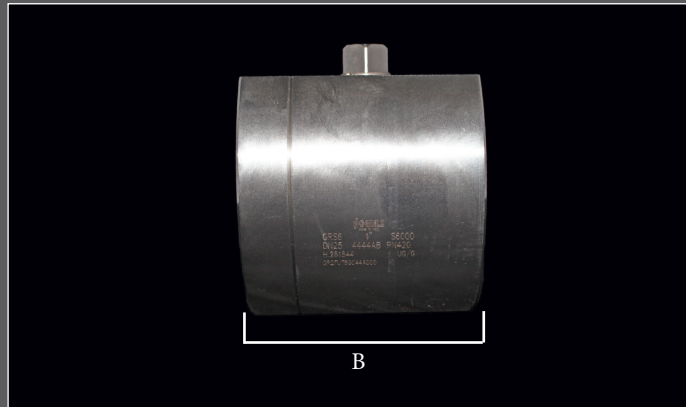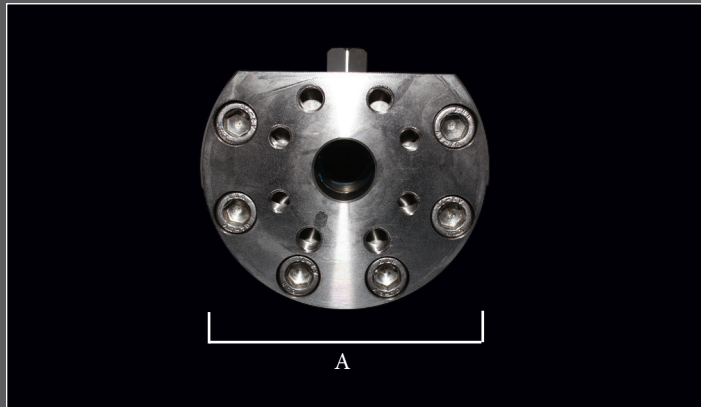

### Features and Benefits

- Carbon steel and 316 Stainless Steel available
- 2 - Way direct mount high pressure ball valve
- Both Code 61 and Code 62 connections on the same side
- Code 61 can be used on one side of the valve and code 62 on the opposite side
- Sizes: Code 61- 1/2" thru 5" Code 62- 1/2" thru 2"
- Standard POM ball seats with buna stem seals

Body Size	A	B	Code 61 Max Working (PSI)	Code 62 Max Working (PSI)
08	2.95	3.07	3,000	6,000
12	3.15	3.86	3,000	6,000
16	3.47	4.65	3,000	6,000
20	3.94	5.71	3,000	6,000
24	4.33	6.50	3,000	6,000
32	4.57	7.80	3,000	6,000
40	5.91	7.80	3,000	N/A
48	5.91	8.27	3,000	N/A
64	6.70	10.16	3,000	N/A
80	8.27	11.61	3,000	N/A



units: inches

### ORDERING INFORMATION

High Pressure Ball Valve Part Numbering System:

**BV-GRS3-GRS6 - SS - 08 - FL61**

BV2-GRS3-GRS6 Series	Material Type		Body Size		Body Size		Connection Type	
2-Way Direct Mount, Dual Pattern (Code 61 and Code 62)	(blank)	Carbon Steel	08	1/2"	32	2"	FL61	Code 61 Flange
	SS	316 Stainless Steel	12	3/4"	40	2-1/2"	FL62	Code 62 Flange
			16	1"	48	3"		
			20	1-1/4"	64	4"		
			24	1-1/2"	80	5"		