


DIN-2SN

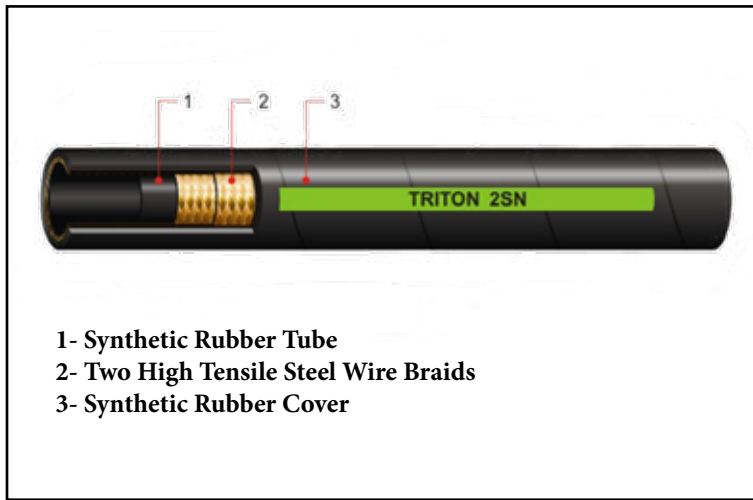

Tube: Oil resistant, synthetic rubber
Reinforcement: Two braids of high tensile wire
Cover: Oil and weather resistant synthetic rubber
Temperature: -40° F / +212° F, Intermittent use up to 250° F
Application: Petroleum based hydraulic fluid, gasoline, water, diesel fuels, lubricating oils, glycol, mineral oils, and more
Termination: 200 series, bite to wire, 1-piece fitting

Key Note: 1/2" 5,000 PSI working pressure with 4 to 1 safety factor

Part Number	Hose I.D.	Hose O.D.		Max Working Pressure	Minimum Burst Pressure	Minimum Bend Radius		Weight	Termination
	(in)	(in)	(mm)	(psi)	(psi)	(in)	(mm)	(lbs/ft)	Fitting Type
2SN-08	1/2"	.87	22	5,000	20,000	7.09	180	.40	200 Series/1-Piece