


FF-HPG SERIES QUICK COUPLINGS (PLT4)

ISO 16028 - Flush Face - High Pressure

Sizes: 1/4" thru 1"

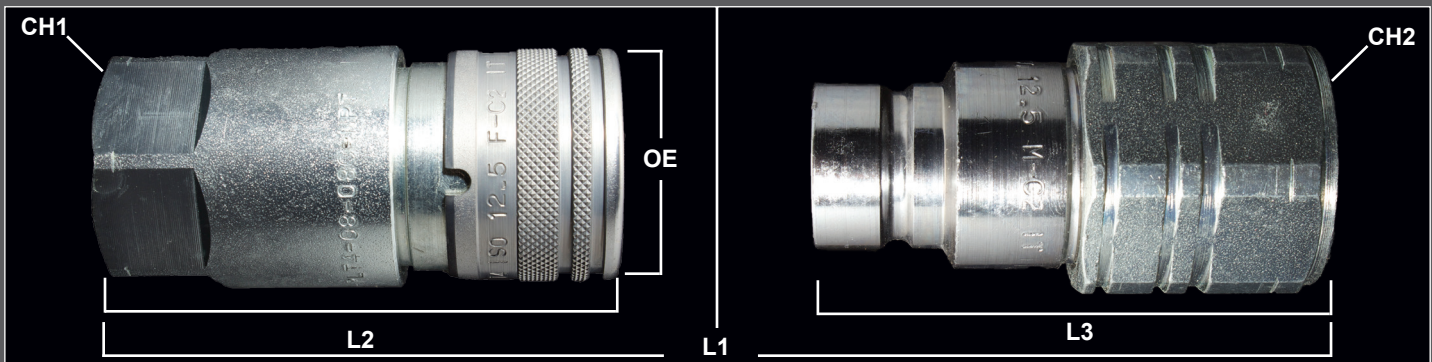

Features and Benefits

- ISO 16028 Standard
- High working pressures to 7,350 PSI
- Sleeve lock device
- Locking radial balls
- Connection under pressure not allowed

Applications

- FF-GP series is ideal for markets where flat face, non-spill couplings are a must.
- High pressure applications
- High impulse applications

MATERIALS

Body: Carbon Steel
 Coating: Gray Nickel Plating
 Seals: NBR standard seals
 Threads: NPT, SAE, JIC, BSPP

MAJOR INTERCHANGES

Parker FE Faster 2FFI
 Tomco FE Aeroquip FD89
 Perfecting HT Snap Tite 74
 Stucchi A & FIRG

DIMENSIONAL & PRESSURE RATING DATA

Body Size	CH1	CH2	OE	L1	L2	L3	Flow Rate @ 14.7 PSI (GPM)	Max Flow Rate (GPM)	Max Working (PSI)
04	.87	.87	1.10	3.94	2.30	2.05	3.17	6.34	7,350
06	1.18	1.18	1.26	4.65	2.89	2.38	6.08	12.15	6,600
08	1.42	1.42	1.50	5.61	3.43	2.87	12	23.78	6,600
10	1.42	1.42	1.65	5.57	3.43	2.87	20	39.63	6,600
12	1.61	1.61	1.89	6.06	3.74	3.19	26.42	52.83	6,100
16	2.17	2.17	2.17	6.97	4.31	3.54	50	73.97	6,100

units: inches

ORDERING INFORMATION

QUICK COUPLING PART NUMBERING SYSTEM:

FF-HPG - 08 - 08 - C - NPT

