


FF-UHP7 SERIES QUICK COUPLINGS (PLT7)

Flush Face - Ultra High Pressure

Sizes: 1/4"

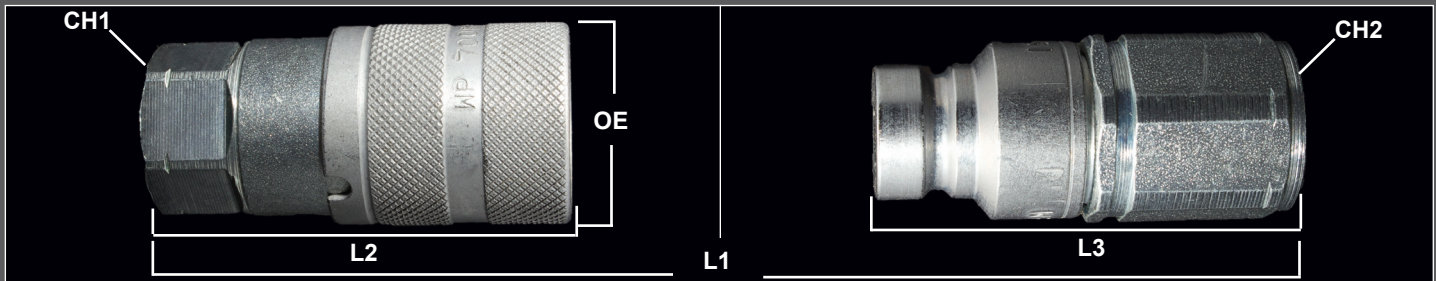

Features and Benefits

- DNP Norm
- 10,000 PSI working pressure
- Will not interchange with ISO 16028 standard
- High resistance steel
- Sleeve locking device
- Locking radial balls
- Connection under pressure not allowed

Applications

- FF-UHP7 series is ideal for markets where flat face, non-spill couplings are a must.
- 10,000 PSI working pressure
- Torque tools
- Emergency systems
- High pressure jacks

MATERIALS

Body: Carbon Steel
 Finishing: Zinc nickel plating
 Seals: NBR standard seals
 Threads: NPT & BSP

MAJOR INTERCHANGES

Stucchi A-HP

DIMENSIONAL & PRESSURE RATING DATA

Body Size	CH1	CH2	OE	L1	L2	L3	Flow Rate @ 14.7 PSI (GPM)	Max Flow Rate (GPM)	Max Working (PSI)
04	.87	.87	1.10	4.0	2.30	2.10	6.35	6.34	10,000

units: inches

ORDERING INFORMATION

QUICK COUPLING PART NUMBERING SYSTEM:

FF-UHP7 - 04 - 04 - N - NPT

