


# Specialty Hoses and Fittings

## GI-Grease Injection Hose-15,000 PSI

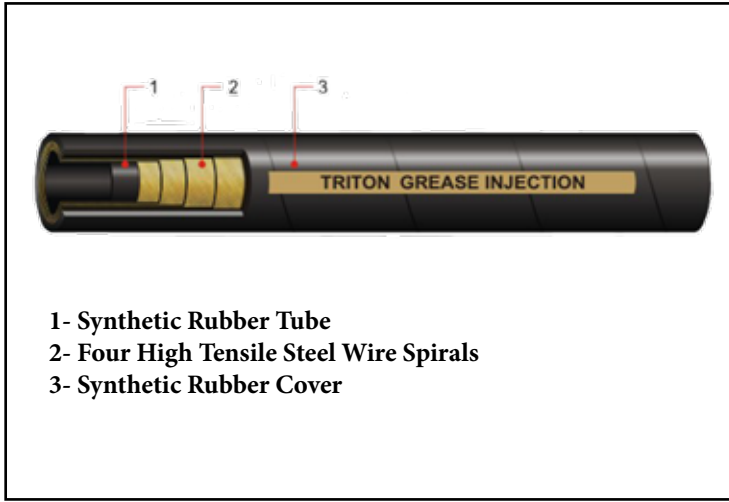

**Tube:** Oil resistant, synthetic rubber

**Reinforcement:** Multiple Spiral Technology

**Cover:** Oil and weather resistant synthetic rubber

**Temperature:** -40° F / +213° F, Intermittent use up to 250° F

**Application:** Grease injection, glycol, methyl alcohol (Methanol) and traces of sour gas

**Termination:** GI series, interlock, external/internal skive, 2-piece fittings

**Key Note:** Used in wireline market for grease injection services. Hose cover must be pin pricked when being used with sour gas

Part Number	Hose I.D.	Hose O.D.		Max Working Pressure	Minimum Burst Pressure	Minimum Bend Radius		Weight	Termination
	(in)	(in)	(mm)			(psi)	(psi)		(in)
GI-08-15K	1/2"	1.02	26	15,000	37,500	9.06	230	1.30	GI/2-piece