


# PVS / PVP SERIES QUICK COUPLINGS

High Pressure - Screw Type

Sizes: 1/4" thru 3/8"

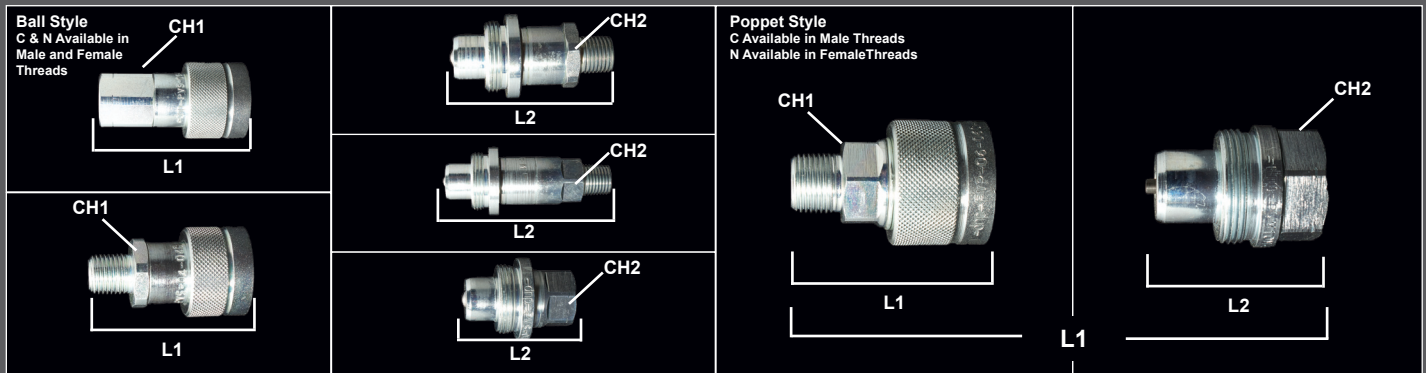

<h3>Features and Benefits</h3> <ul style="list-style-type: none"> <li>• Screw type</li> <li>• 10,000 PSI</li> <li>• Ball style / Poppet style</li> </ul>	<h3>Applications</h3> <ul style="list-style-type: none"> <li>• High Pressure Jacks</li> <li>• Torque Equipment</li> </ul>
--	---

**MATERIALS**

Body: High Resistant Steel  
 Finishing: ZN-Fe (CRIII) Plating  
 Seals: NBR standard seals  
 Threads: NPT & BSPP

**MAJOR INTERCHANGES**

Faster CVV

## DIMENSIONAL & PRESSURE RATING DATA

Male Threads

Body Size	CH1	CH2	OE	L1	L2	L3	Flow Rate @ 14.7 PSI (GPM)	Max Flow Rate (GPM)	Max Working (PSI)
04 (ball)	.866	.75	1.181	2.09	1.54	3.30	1.32	2.64	10,290
04 (poppet)	.866	.75	1.181	2.04	1.60	3.18	1.32	2.64	10,290
06 (ball)	.94	1.26	1.38	2.44	1.60	3.58	2.38	5.28	10,290
06 (poppet)	.94	1.26	1.38	2.19	1.67	2.87	2.38	5.28	10,290

Female Threads

04 (ball)	.87	.75	1.181	2.20	1.54	3.30	1.32	2.64	10,290
06 (ball)	.94	1.26	1.38	2.62	1.60	3.76	2.38	5.28	10,290

units: inches

## ORDERING INFORMATION

QUICK COUPLING PART NUMBERING SYSTEM:

**PVS - 04 - 04 - C - F - NPT**

