


# ST SERIES QUICK COUPLINGS

Straight Thru - Unvalved

Sizes: 1/4" thru 1-1/4"

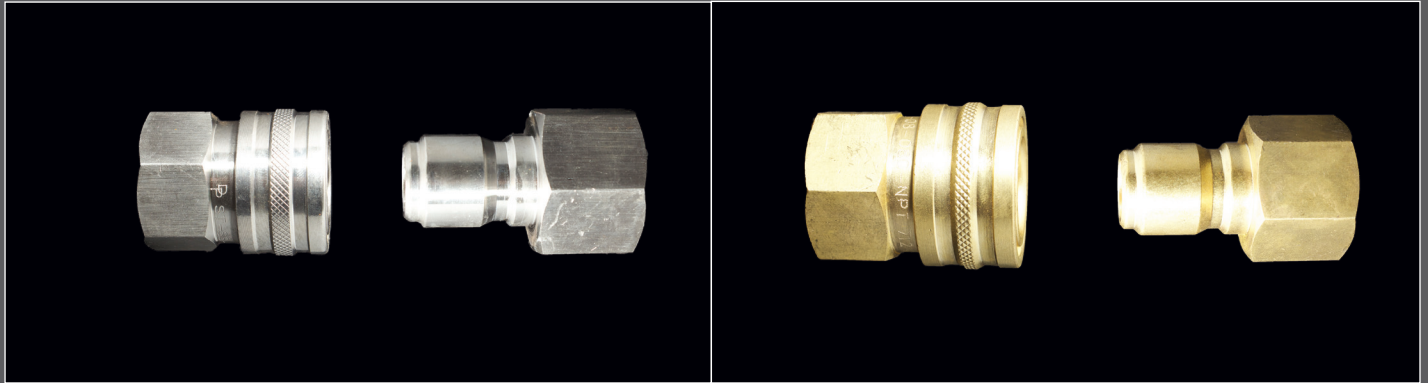

## Features and Benefits

- Brass and Stainless
- Unvalved
- Radial locking balls

## Applications

- Commonly used in pressure washer applications
- Low and medium pressure hydraulic applications

## MATERIALS

Body: Brass and 316 SS  
 Seals: NBR standard seals  
 Threads: NPT

## DIMENSIONAL & PRESSURE RATING DATA

| Body Size | Steel Working PSI | Brass Working PSI | 304 SS Working PSI |
|-----------|-------------------|-------------------|--------------------|
| 04        | 5,500             | 5,200             | 6,700              |
| 06        | 3,500             | 2,700             | 5,500              |
| 08        | 2,700             | 2,200             | 3,000              |
| 12        | 2,000             | 1,700             | 3,000              |
| 16        | 2,000             | 1,200             | 1,700              |
| 20        | -                 | 1,700             | -                  |
| 24        | -                 | 1,400             | -                  |

units: inches

## ORDERING INFORMATION

QUICK COUPLING PART NUMBERING SYSTEM:

**ST - B - 06 - 06 - C - M**

| ST SERIES                                 | Material |                     | Body Size |      | Body Size |        | Thread Size |      | Thread Size |        | Coupler / Nipple |         | Thread Type |            |
|---|----------|---------------------|-----------|------|-----------|--------|-------------|------|-------------|--------|------------------|---------|-------------|------------|
| Straight Through Pressure Washer Coupling | (blank)  | Carbon Steel        | 04        | 1/4" | 16        | 1"     | 04          | 1/4" | 16          | 1"     | C                | Coupler | M           | Male NPT   |
|   | B        | Brass               | 06        | 3/8" | 20        | 1-1/4" | 06          | 3/8" | 20          | 1-1/4" | N                | Nipple  | F           | Female NPT |
|   | SS316    | 316 Stainless Steel | 08        | 1/2" | 24        | 1-1/2" | 08          | 1/2" | 24          | 1-1/2" |                  |         |             |            |
|   |          |                     | 12        | 3/4" | 12        | 3/4"   |             |      |             |        |                  |         |             |            |