


Specialty Hoses and Fittings

WB-Waterblast Hose 15,000 PSI

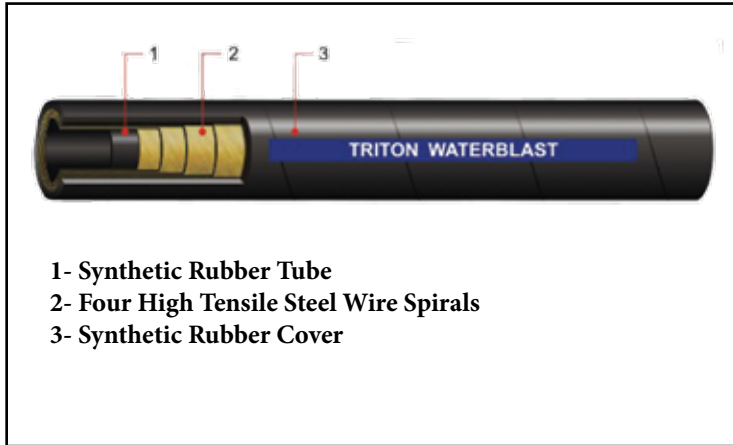

Tube: Oil resistant, synthetic rubber

Reinforcement: Multiple Spiral Technology

Cover: Oil and weather resistant synthetic rubber

Temperature: -40° F / +213° F, Intermittent use up to 250° F

Application: Waterblasting market

Termination: WB series, interlock, external/internal skive, 2-piece fittings

Key Note: Waterblasting market

| Part Number | Hose I.D. | Hose O.D. | | Max Working Pressure | Minimum Burst Pressure | Minimum Bend Radius | | Weight | Termination |
|-------------|-----------|-----------|------|----------------------|------------------------|---------------------|------|--------|-------------|
| | (in) | (in) | (mm) | | | (psi) | (in) | | |
| WB-08-15K | 1/2" | 1.02 | 26 | 15,000 | 37,500 | 9.06 | 230 | 1.30 | WB/2-piece |