
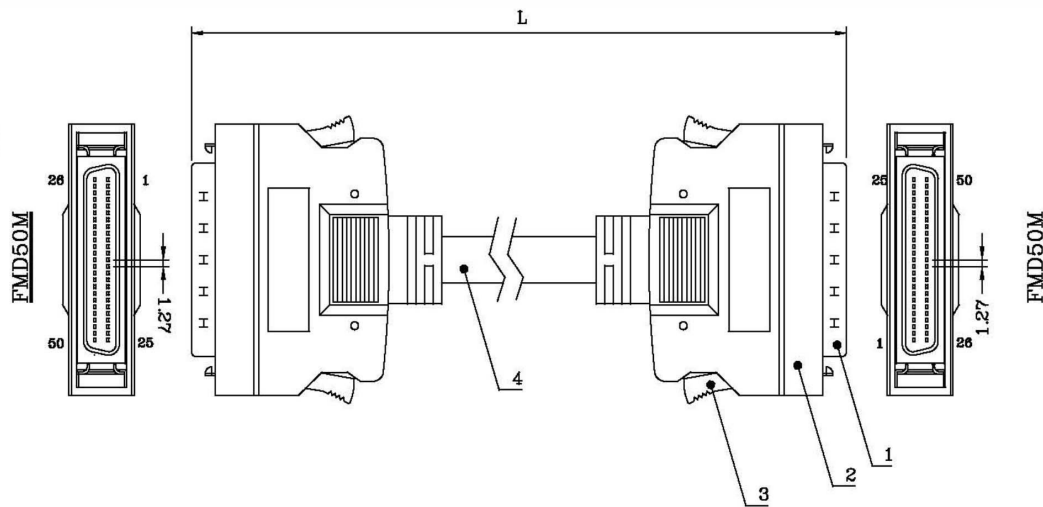


1 2 3 4 5 6 7 8

A

A

FMD 50PIN(M) FMD 50PIN(M) FMD 50PIN(M) FMD 50PIN(M)

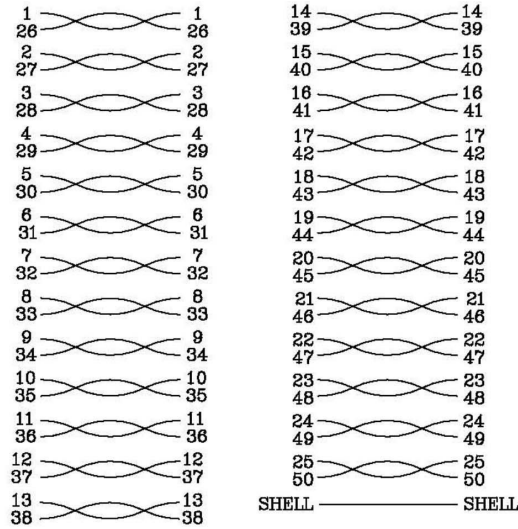

Length Unit:CM	Tolerance
< 50	± 2
50-100	± 3
101-150	± 4
151-300	± 5
301-500	± 6
> 500	± 10

- 100% OPEN / SHORT / INSULATING TEST
- INSULATION TEST: 2MΩ

COMPONENTS	DESCRIPTION	Q'TY	RoHS Compliant		T.M.C. - THE MATE COMPANY	
1	FMD50M Half Pitch D-SUB 50P Male Connector. Shell: Steel Nickel Plated Insulator: Black P.B.T Contact:Phosphor Bronze 5μ" Gold Plated.	2	APPD. 核准 Angel	SCALE 比例 参考	TOLERANCE 容許公差 0.00 ± ANG. ±	PART NAME C3030-xPAM
2	Hood P.V.C Molded Color: Beige Inner Molded With Copper Foil Shielded	2	DWG. 製圖 Yumi			
3	SCOIS/M Spring Latch Stainless steel Hood: ABS Color: Beige	4	DATE 制表日 2010/02/11	UNIT 單位 MM	PART NO. 料號	
4	Cable UL2090 28AWG 25Pairs LD 0.6mm O.D 8mm Impedance: 90Ω ±10Ω Color: Beige L: XXXXmm	1	PAGE 張數 1 OF 1	REV. 版次 A		

1 2 3 4 5 6 7 8

H

H