



1	2	3	4	5	6	7	8	9
REV.	REMARK	DATE	SIGN.					


RoHS

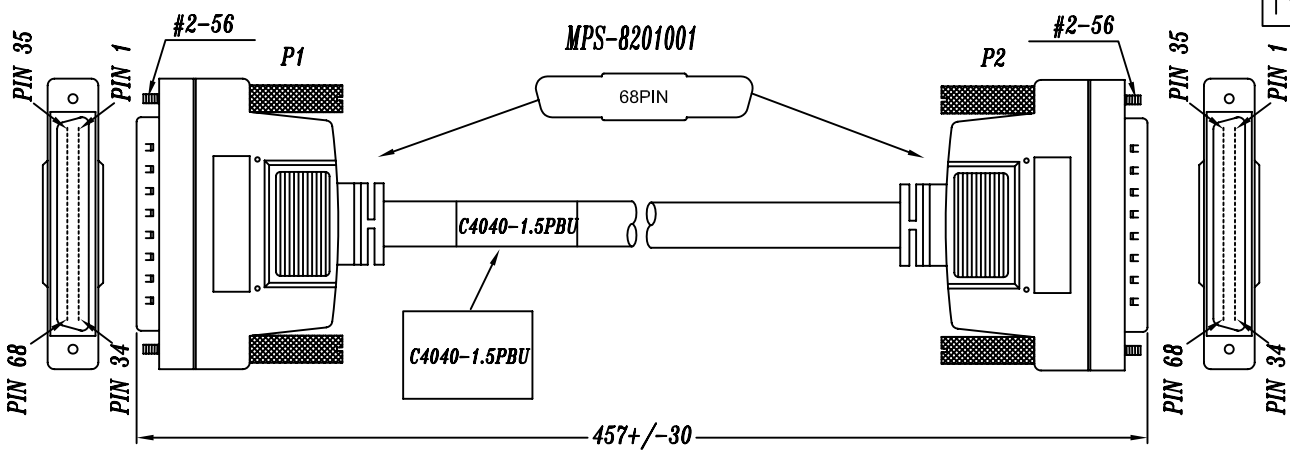

**WIRE LIST**

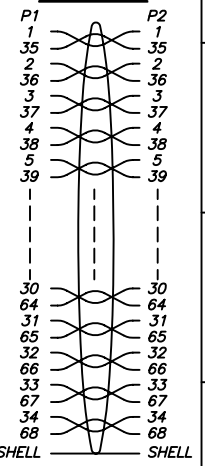

**LABELLING ON BAG:**

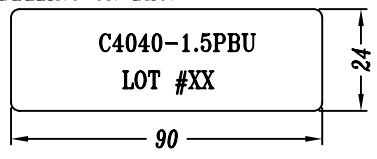

**MATERIAL RoHS COMPLIANT:**

**NOTE:**

- CABLE SPEC.: UL-20276, 30AWG, ALUMINIUM FOIL+BRAIDED(Madison 68KBKLF045), BLACK SHIELDED: ALUMINIUM FOIL & TINNED COPPER BRAIDING  
CONDUCTOR INSULATON MATERIAL: FOAMED POLYETHYLENE+SKIN
- CONNECTORS: P1&P2 SCSI-3 HPDB 68PIN MALE IDC MOLDED TYPE W/THUMB SCREW #2-56

DataStorageCables.com	DESC.	SCSI 68P (M) TO SCSI 68P (M) W/THUMB SCREW	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	1 = 1	UNIT	mm	DWG NO: DWG\RC\2005
	P/N	C4040-1.5PBU	CUSTOMER P/N			Ku.	XX : ±0.1 X.XX : ±0.05 X.XXX : ±0.02	DATE	09/19/06		

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---