
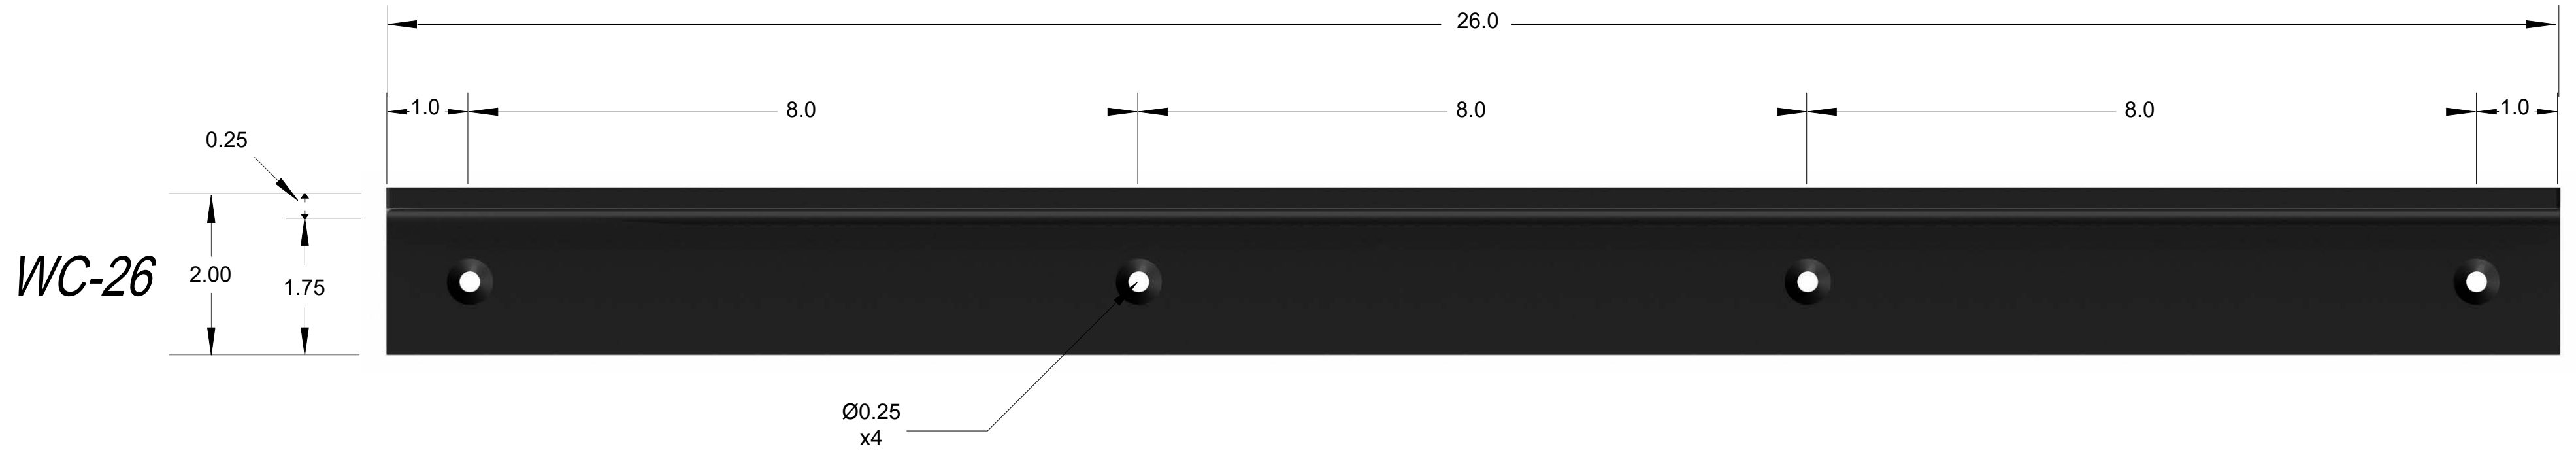
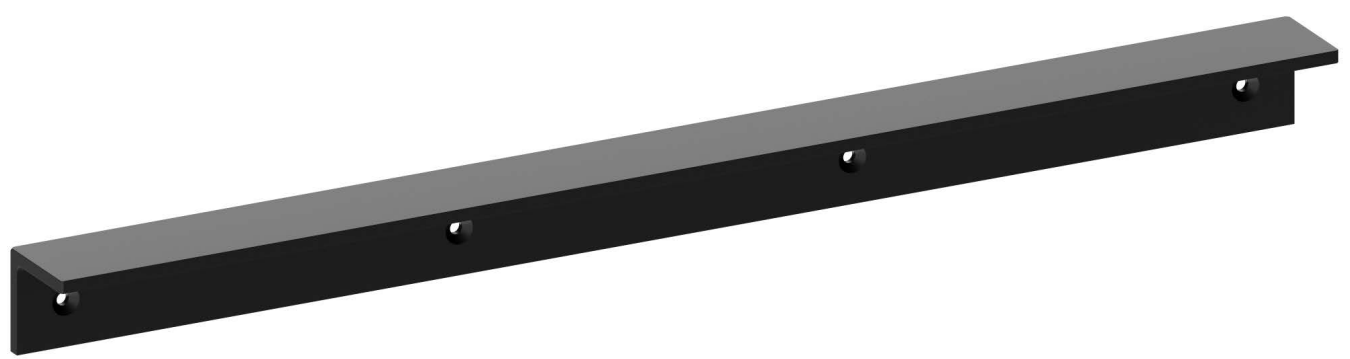
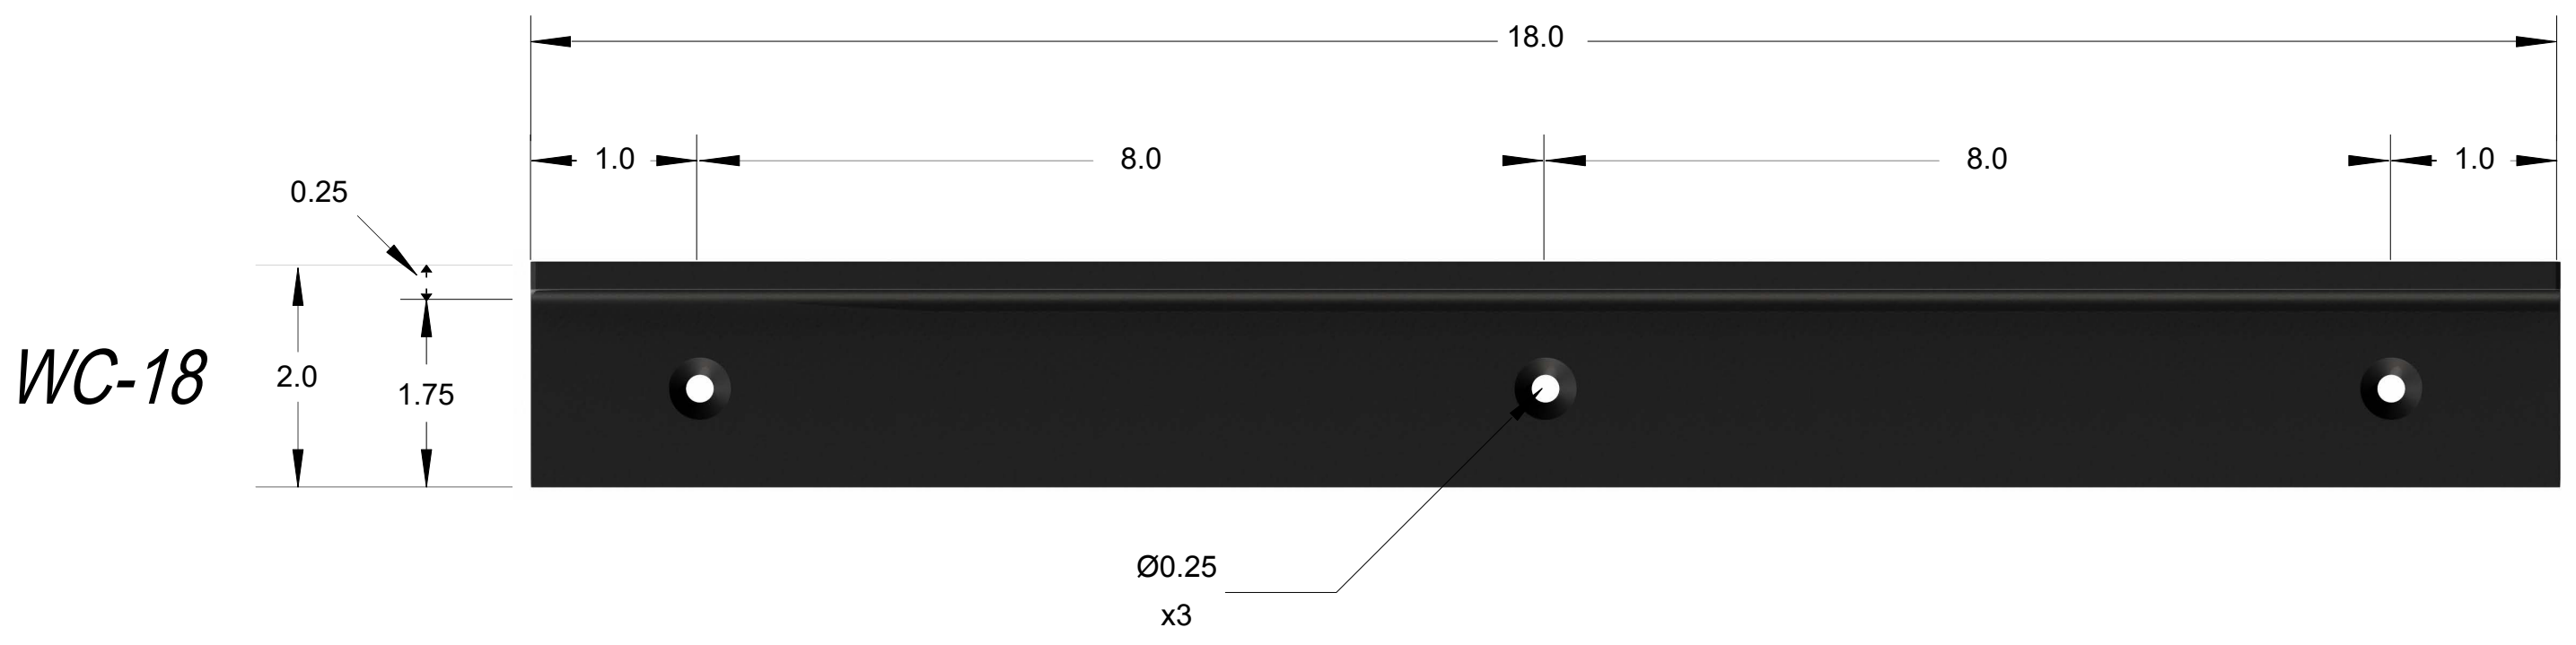
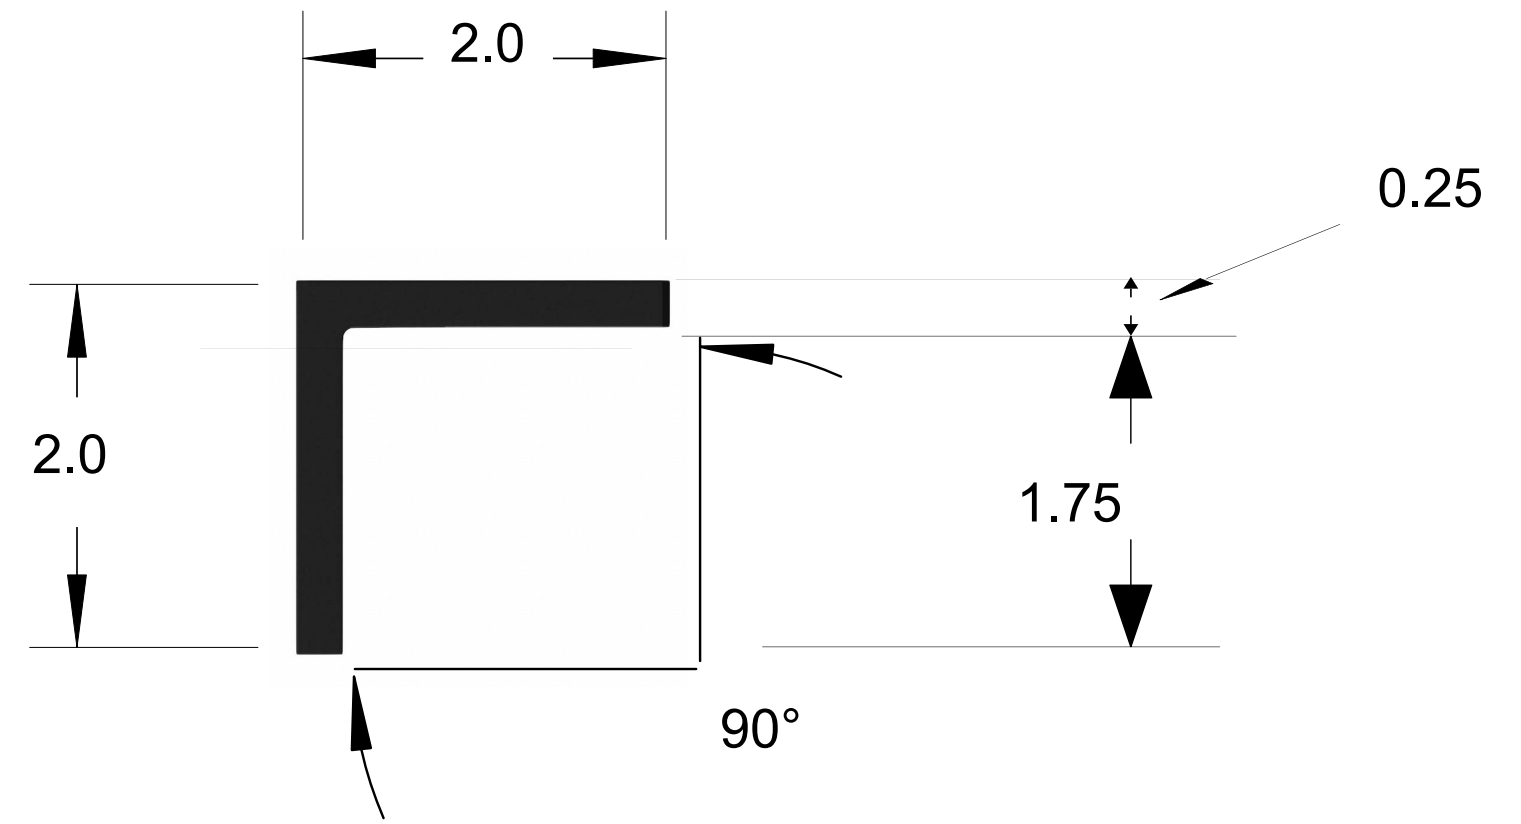


- NOTES: UNLESS OTHERWISE SPECIFIED
1. ALL DIMENSIONS ARE THEORETICALLY SHARP.
 2. REMOVE BURRS AND BREAK ALL SHARP EDGES .03 MAX.
 3. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE STATED.
 4. PARTS SHALL BE FREE OF GREASE AND CUTTING FLUID.
 5. BLACK RUST INHIBITOR TEXTURE FINISH.


Configuration Table	
Model	Length
WC-12	12"
WC-18	18"
WC-26	26"

REVISION STATUS - EACH SHEET IS MARKED WITH ITS REVISION				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE	8/4/20	

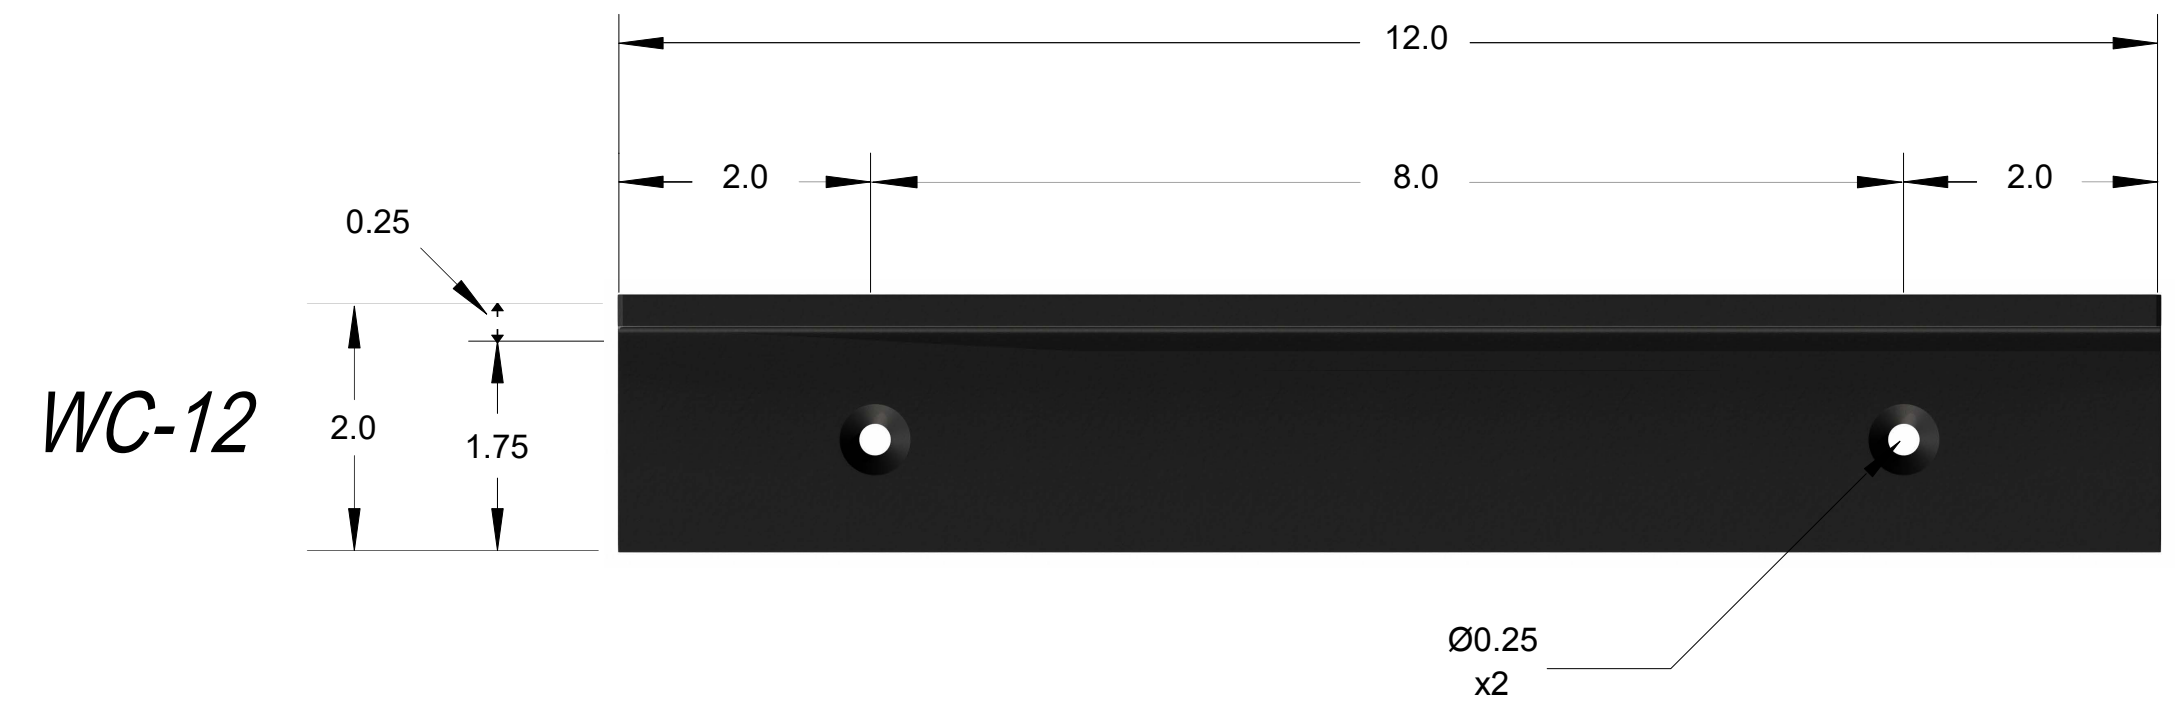

MADE WITH AMERICAN ALUMINUM

APPROVED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		ENGINEER		
TOLERANCES ARE:		ENGINEER		
ANGLES		ENGINEER		
.XX = .01 XX' = 1"		CHECKED		
.XXX = .005		DRAWN	SMR	8/20
INTERPRET DRAWINGS IN ACCORDANCE WITH:		MANAGER APPROVAL		TITLE
ASME Y14.100 ENGINEERING DRAWING PRACTICES				SUPPORT CLEAT, Wall Cleat
ASME Y14.30 ABBREVIATIONS				SIZE
ASME Y14.5 DIMENSIONING AND TOLERANCING				CAGE CODE
ASME Y14.6 SCREW THREAD REPRESENTATION				DWG NO
AWS A2.4 WELDING SYMBOLS				WC-xx
IEEE STD 315 SYMBOLS FOR ELECTRICAL AND ELECTRONIC DIAGRAMS				REV
				A
				SHEET 1 of 1