

Hardware Includes:
2 x Screw taper screw

Tools Required:
Drill Bit
Power Drill
Flat Head Screw Driver



Diffuser Install Honda Civic Sedan

Install shall be done entirely at your own risk. We shall not be liable for any damage which may result from the Installation.

1. Pop Off x 2 Fastener Clips

Self tapper screws are located near the back of underside bumper. Use a flat head screw driver to pop off the self tapper screw.

There will be one on each side where the diffuser will be attached on.



2. Screw off x 2 OEM Nuts

These nuts are located about 5 inches or more inward (towards mid of car). Screw them off counter clock-wise.

There will be one on each side where the diffuser will be attached on.



3. Hold Diffuser Under Holes

Make sure the predrilled holes on the diffuser matches the holes of the clips.
Push the fastener into diffuser/bumper and make sure it is securely in place

There will be one on each side where the diffuser will be attached on.




4. Hold Diffuser Under Holes

Make sure the predrilled holes on the diffuser matches the OEM NUT PLACEMENT. The "RED" SCREW must go through the predrilled hole on diffuser first before screwing back OEM NUT

There will be one on each side where the diffuser will be attached on.

Diffuser is propped up with one hand - where as the free hand attempts to screw OEM nut back on

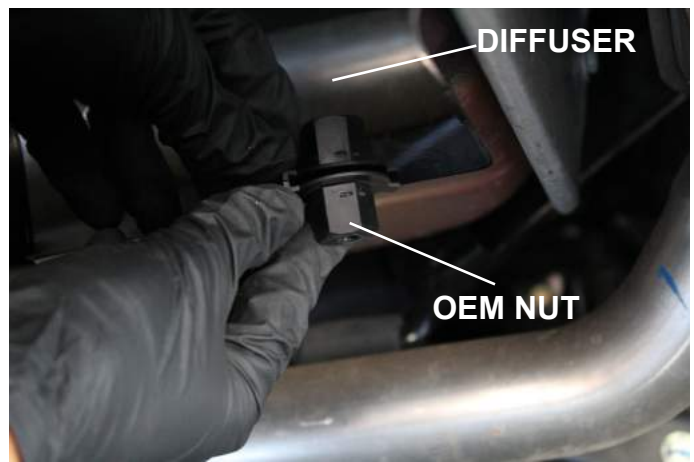

5. Pop off x 2 fastener Clip

There will be 2 fastener Clips located on each side of underside rear bumper behind rear wheel well. Use a FLAT HEAD screw driver to pop off clips



5. Drill 2nd/3rd Piece of Diffuser

Place Diffuser's predrilled hole where the fastener used to be. Push fastener clip into hole until it is securely holding the piece of diffuser.

NOTE - it may be wobbly at first because you have not drilled in the 'Self taper screw' yet

Now firmly align diffuser piece against the **inner line**, while holding diffuser securely on to bumper to avoid any spaces between bumper/diffuser

NOTE - **INNER LINE** is a guide for the diffuser to be side by side with it, will not past it, nor be on top.

