





Installation Guide



**Quadra
SVT2-2**



**Quadra
SVT2-3**

Before Installation



CAUTION

Failure to read these instructions prior to installation may result in personal injury, property damage, or product failure. Manufacturer assumes no responsibility for product failure due to improper installation.



DO NOT RETURN TO STORE

If you have any trouble, contact us before reaching out to the retailer. we'll make it right. Our customer service team will be glad to assist you with any assembly, missing part or questions that you may have about your products.

Contact CASA FIXTURE 📞 **833-888-8223**


PRIOR TO INSTALLATION

- 1- For best results, we recommends that this unit be installed by a licensed, professional plumber.
- 2- Please read over these instructions thoroughly before beginning installation. Make sure that you have all tools and supplies needed to complete the installation.
- 3- Please flush the water system to ensure that no metal swarf, solder, and other impurities can enter the faucet that might damage the cartirdge. (Most of the leakages and water flow issues are from avoinding this very necessary step).
- 4- Turn off the hot and cold water lines at the angle valve and turn on the old faucet to release any built-up pressure.
- 5- Keep this booklet and the receipt (or other proof of date and place of purchase) for this product in a safe place. The receipt is required should it be necessary to request warranty parts.
- 6- Please keep the box and packaging materials until your product is completely installed and functional.


Cleaning and Care

Clean the faucet often with a soft cloth to keep it looking like new. For heavy cleaning you can use mild liquid detergents or non-abrasive liquid polisher. Rinse with water and dry with a soft cloth. Avoid abrasive cleaners, steel wool and harsh chemicals as these will dull the finish and void your warranty.

Trim Installation Instructions

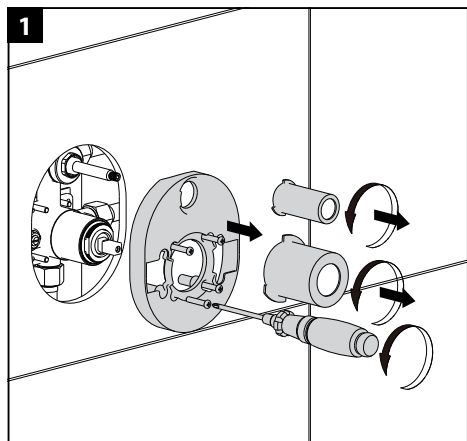

Remove two round mud guards by turning counter-clockwise and discard.
Remove the rough-in box and discard.

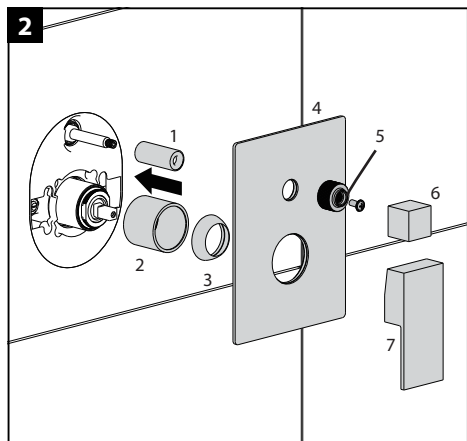


Screw small decorative tube(1) over the diverter valve and slide large decorative tube(2) and cartridge cover(3) onto the pressure balancing valve.

Use water to wet the round rubber gaskets on the cover plate(4) and slide cover plate over(4) two decorative tubes. Gently press cover plate(4) against the finished wall.

Screw the Gear Cipher Adapter(5) on the diverter cartridge.

Install cartridge handle(6) and diverter handle(7). Secure by tightening set screw by using the supplied Allen Wrench. Cover the hole with the supplied plug.

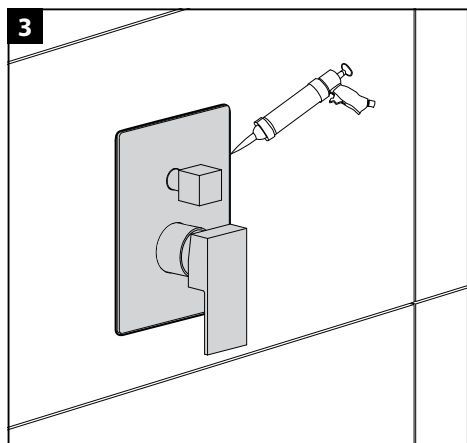


When firmly securing the trim plate onto the wall, apply a thin layer of silicone sealant around its perimeter to prevent water splashes from entering the wall.

Make sure not to apply it to the back of the trim plate, in order to avoid potential issues during future disassembly.

Dimensions

Critical dimensions show in mm

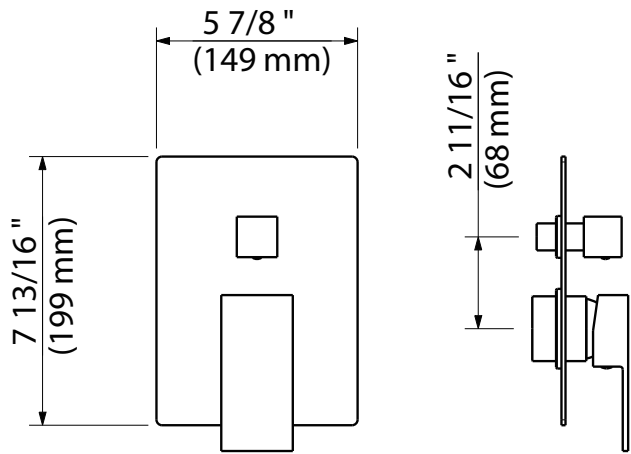

Warranty

Lifetime limited warranty against finish defects to the original consumer purchaser.
1 year warranty if used in commercial installations.