



**Burson Conductor 3 Performance (C3P)
Headphone Amplifier / Pre Amplifier / USB DAC**

User Manual

Register for warranty Ref. page 6 for details

Thank You.

All of us at Burson Audio would like to say thank you, and congratulations for purchasing the Burson Conductor 3. We sincerely believe that your Burson Conductor 3 Performance is an intelligent investment that will bring you many years of musical enjoyment and satisfaction.

We understand how eager you are to begin listening and we want you to become familiar with the full capabilities of the Burson Conductor 3. However, before powering on the device, we encourage you to look through the manual.

Team Burson

The less the equipment tampers with the music, the greater the music becomes. This has been the core design philosophy of Burson Audio since 1996. If the equipment is honest and transparent then the proper tempo, dynamics and tone will materialize as a natural expression of the music and it becomes unnecessary to flavor the original sound. We believe that this ideal can never be achieved through standard circuitry building blocks such as opamps, IC regulators or even standard transformers. Instead we work towards this ideal through the research and development of customized solid-state circuitries that are developed specifically to suit our applications. Only then will each and every component involved be pushed to their performance peak. And only then will the end result be consistent with our idealism.

Team Burson

Unpacking


After carefully unpacking your Burson C3P, inspect for any shipping damage and call your dealer immediately if any is found. Do not plug your Burson C3P into any outlet if you find shipping damage. Please save all packing materials so the unit can be easily and safely shipped if the need arises.

The Accessories

- Conductor 3 Performance Headphone Amp / Pre Amp / DAC
- External Power Supply 24V 3A
- USB Data cable
- Remote control unit
- Hex Key / Spare Fuse / Spare IC opamps for troubleshooting

Stand Alone Setup

Four Easy Steps to Setup Your Burson

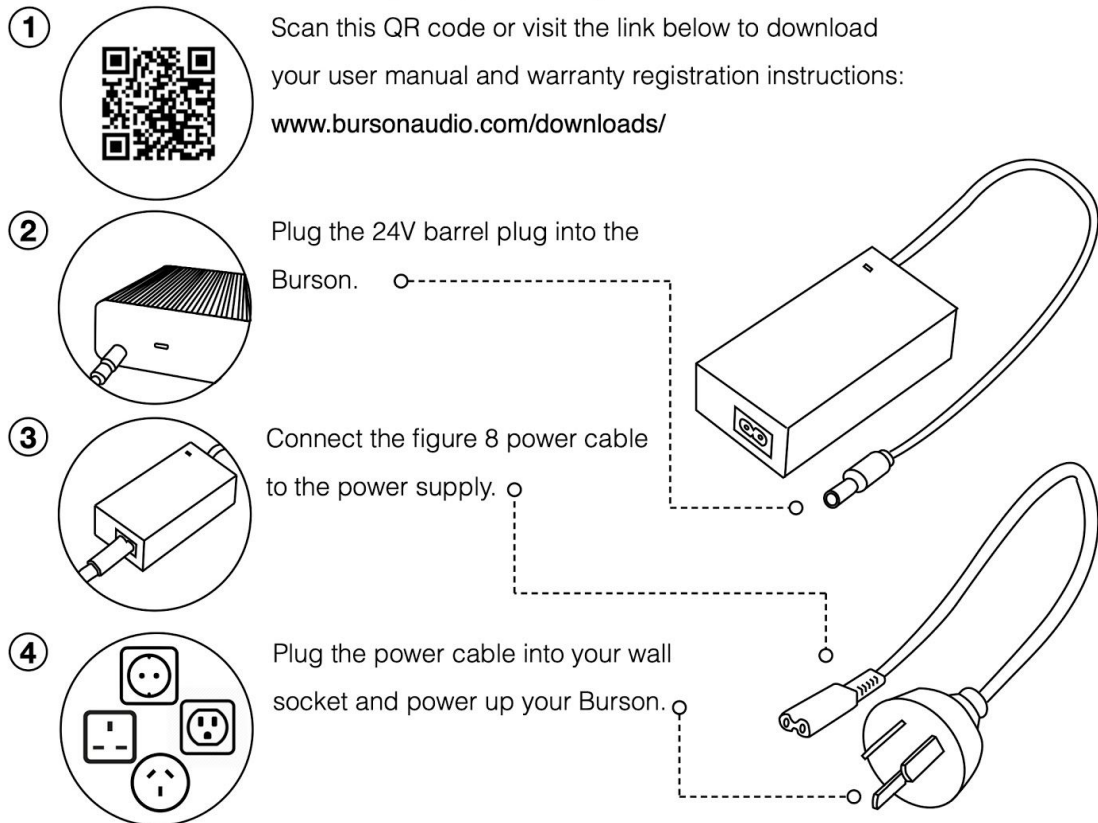

Connections



USB interface software setup guide.

For OSX, iOS, Android system, no driver is needed. For Windows driver download and setup procedures please visit our main website for support: <https://www.bursonaudio.com/downloads/>

(Please download the latest Windows driver: [Burson_UsbAudio_v4.59.0_2019-04-02_setup.exe](#))

Break-in, Warm-up and Caring.

The sound of the Burson Conductor 3 improves steadily within minutes after powered-up. Depending on the resolution of the system and the attentiveness of the listener, you may find that the sound continues to improve over the first several weeks of operation.

Never, connect or disconnect the headphone jack or the RCA cables from the Conductor 3 while music is Conductor playing. This could damage the Conductor 3.

Menu Items:

Input	USB	PCM 32bit 786K / DSD512
	Toslink	PCM 24bit 192K
	Coaxial	PCM 24bit 192K
	Bluetooth	PCM 24bit 96K
Output	Headphone	
	Pre Out	Pre Amp output with volume control
	DAC Out	2V RMS line-level no volume control
Gain Level	High* / Low	High / Low
FIR Filter	Brickwall, CMFR, Reserved, AP Fast*, MP Slow, MP Fast, LP Slow, LP Fast	
DPLL (DSD)	DPLL Off / Low / Mid / High*	
DPLL (PCM)	DPLL Off / Low / Mid / High*	
DE-EMPHASIS	On / Off*	Only turn on if your source is a cassette tape player
RESTORE SETTINGS	YES / NO	

* Default selection marked with*



FIR Filters are part of the digital process built in the DAC chip. These filter settings only affect high-frequency roll-offs. Visual examples of their effects are showing in this post by veteran reviewer Raoul Trifan [\[+\] Learn More](#)


For details on the various filter settings please refer to the official datasheet of the ESS9038 DAC: [\[+\] Learn More](#)

Opamp Change & Upgrade

The Burson Conductor 3 allows opamp changing to customise its sound to the owner's preference. When changing opamps, please be aware of the following:

1. The opamp power supply voltage in the Burson Conductor 3 is +/-15V
2. There are 2 dual opamps and 2 single opamps inside the Conductor 3
3. Please refer to the following diagram for the position and correct orientation of the opamps.

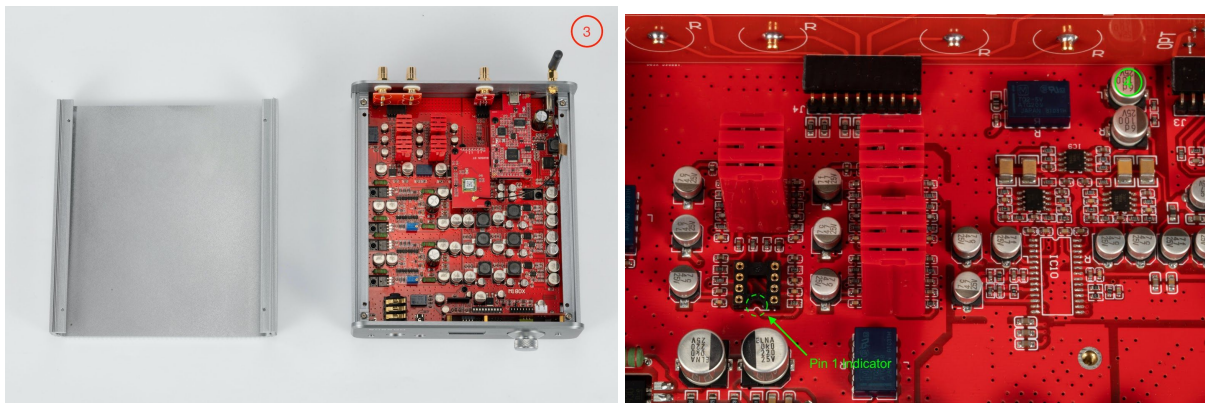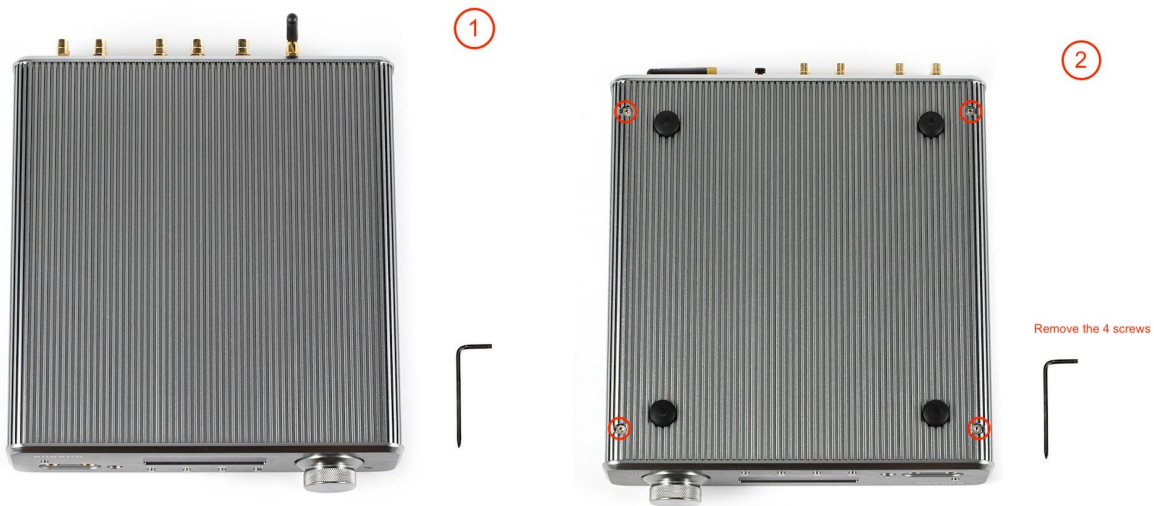

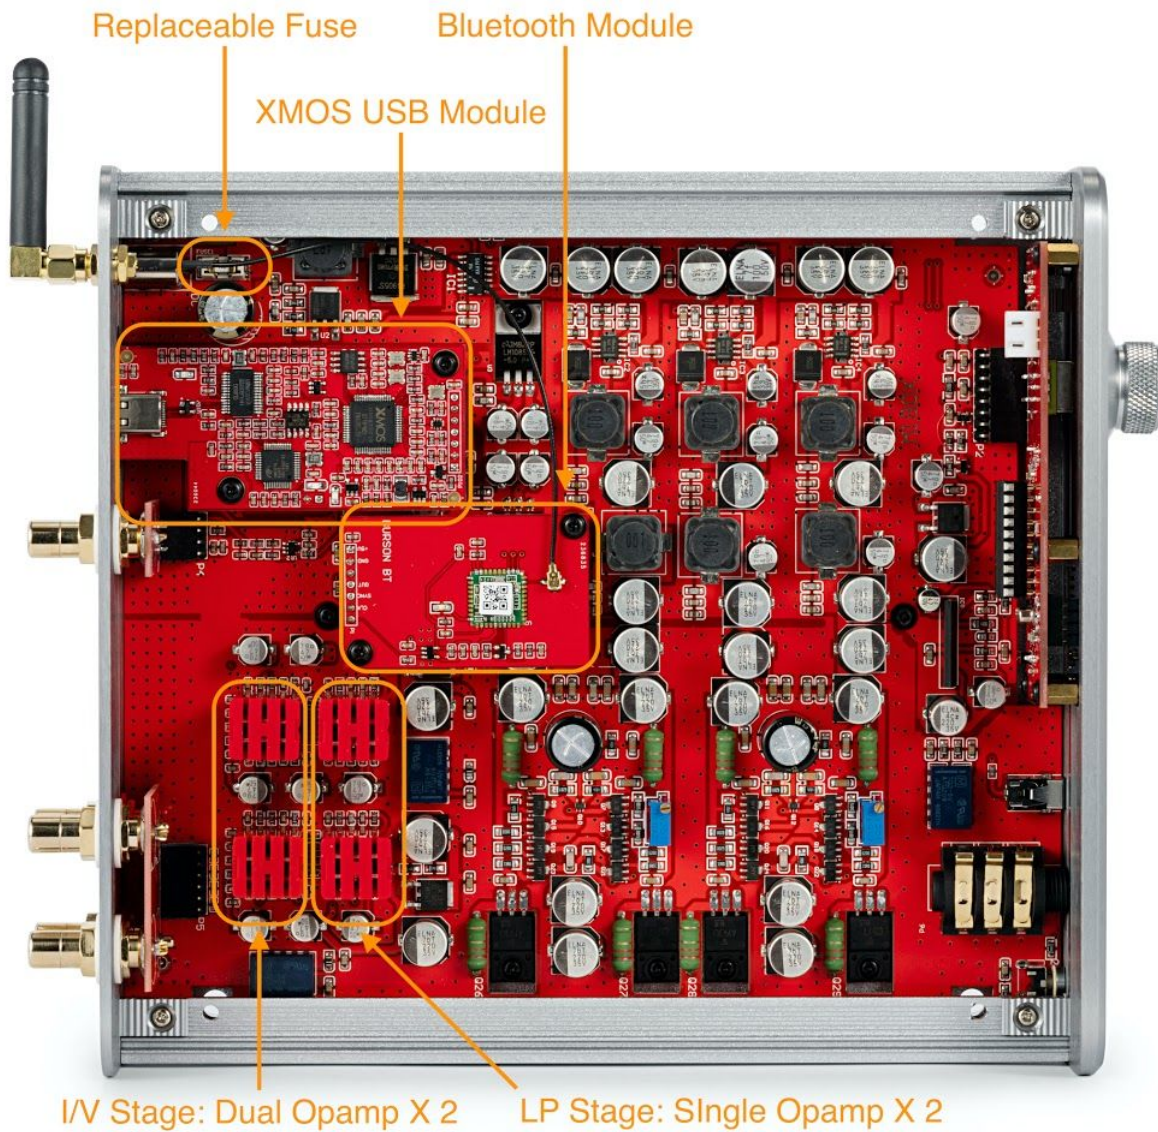

The Initial Powering up

Make sure volume control has been turned to minimal when using your Conductor 3 for the first time. Always power on your source machine first and your power amp last. When powering down your system reverse the steps.

Free Warranty Extension

All Burson Audio products are covered by 24 months + 12 months of warranty (See conditions below).

<https://www.bursonaudio.com/warranty/>.

Warranty Conditions

Burson Audio warrants that this product shall be free from defects in materials and workmanship for: The warranty period begins at the date of sale and is subject to the following requirements and understandings:

1. This is a non-transferable warranty.
2. This product is only warranted in the country sold by Burson / authorised dealer.
3. The authorised seller will handle all warranty claims during the warranty period.
4. The product must not have been modified in any manner whatsoever, or the warranty is immediately voided.
5. The product must not have been stored in a humid, damp environment; nor subjected to weather, water, or salt spray.
6. Burson shall not, under any circumstances, be liable for any incidental or consequential damages arising from the loss of property or other damage or losses due to the failure of a Burson Conductor 3. Burson will not pay for loss of use or inconvenience caused by the failure of a Burson Conductor 3. Burson will not pay for damage caused to other audio components caused by the failure of the Burson Conductor 3 within the limits allowed by Australian Law.
7. The compatibility between our USB receiver and your computer's operating system is not guaranteed during or after the warranty period.