

Side Table Assembly Instructions

Thank you for purchasing your new metal lawn side table from Torrains Mfg. Co., LLC.


Occasionally, when opening your metal lawn table, you may have some discoloration. This is caused from condensation in the packing. It is easily removed with chrome polish and a soft cloth.

Should you encounter issues with your new table, its parts or assembly, please contact us at 888-229-2421, extension 2, or email tmc@torransmfgco.com.


- (a) "+" shaped bolt (2 pcs)
- (b) Screws (4 pcs)
- (c) Nuts (12 pcs)
- (d) Washers (12 pcs)

Step 1

Attach each leg to "+" shaped bolt (a) with washers (d) and nuts (c). Assemble as shown.

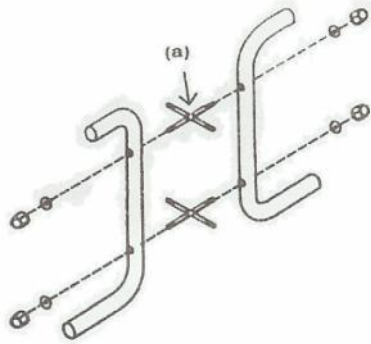

Assemble opposite legs to the "+" shaped bolt. Then attached the remaining legs.

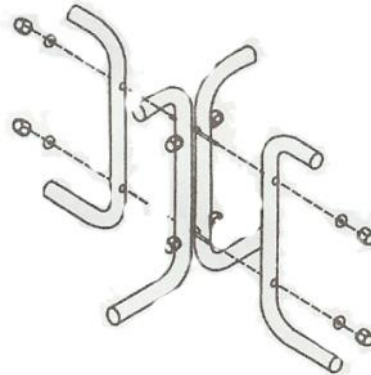

Step 2

Put the table top on the leg assembly and then fix it with screws (b), washers (d) and nuts (c).

Assemble as shown

