


SYRINGE SPECIFICATIONS



Dispensing syringes allow for a controlled and precise flow of material. Manual syringes consist of a barrel, stopper, and plunger for manual deposit of materials. Manual syringes are available either assembled or unassembled and will work with all Jensen Global dispensing tips. Air syringes require a heavy-duty barrel and stopper to safely dispense material up to 100 psi. The size of the syringe is measured in cc or ml and range from 1 cc to 100 cc.

Syringe Specifications

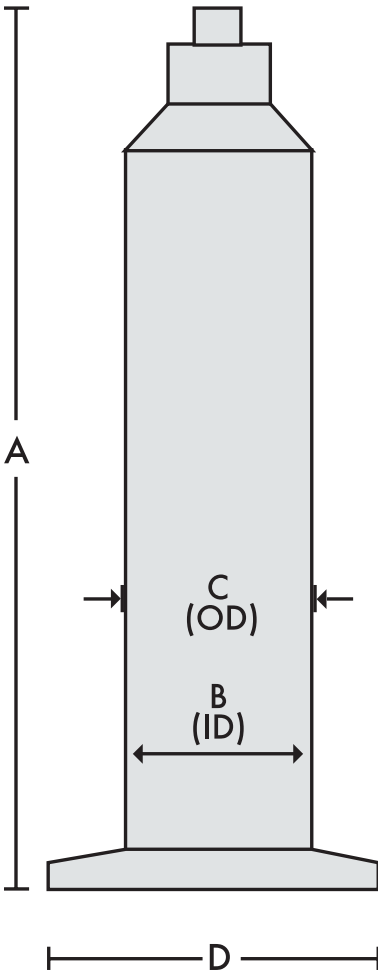

PREMIUM		A	B	C	D
AIR SYRINGE	SIZE	LENGTH (INCH/MM)	ID (INCH/MM)	OD (INCH/MM)	FLANGE (INCH/MM)
Luer Lock	10 cc	3.57/90.76	0.618/15.70	0.728/18.51	1.14/29.02
Luer Lock	30 cc	4.64/118.00	0.883/22.43	1.00/25.44	1.53/38.86
Luer Lock	50 cc	6.93/176.21	0.883/22.43	1.01/25.68	1.53/38.86

STANDARD		A	B	C	D
AIR SYRINGE	SIZE	LENGTH (INCH/MM)	ID (INCH/MM)	OD (INCH/MM)	FLANGE (INCH/MM)
Luer Lock	3 cc	2.95/74.93	0.373/9.448	0.452/11.50	1.243/31.58
Luer Lock	5 cc	2.78/70.62	0.494/12.55	0.58/14.73	1.244/31.60
Luer Lock	10 cc	3.59/91.19	0.614/15.60	0.734/18.65	1.353/34.40
Luer Lock	30 cc	4.60/116.86	0.878/22.31	1.02/25.91	1.76/44.70
Luer Lock	50 cc	7.04/195.35	0.878/22.31	1.02/25.91	1.76/44.70

MANUAL SYRINGE	SIZE	LENGTH (INCH/MM)	ID (INCH/MM)	OD (INCH/MM)	FLANGE (INCH/MM)
Luer Lock	3 cc	2.652/67.360	0.372/9.448	0.468/11.887	0.848/21.539
Luer Lock	5 cc	2.983/75.768	0.478/12.141	0.553/14.046	1.058/26.873
Luer Lock	10 cc	3.830/97.282	0.579/14.706	0.661/16.789	1.157/29.387
Luer Lock	20 cc	4.27/108.458	0.776/19.710	0.874/22.199	1.53/38.862
Luer Lock	30 cc	4.58/116.332	0.876/22.250	0.995/25.273	1.75/44.450
Luer Lock	50 cc	4.896/124.358	1.13/28.702	1.21/30.734	1.95/49.53
Luer Lock	100cc	7.500/190.500	1.241/31.521	1.364/34.645	1.851/47.015
Luer Slip	1 cc	3.164/80.365	0.183/4.648	0.269/6.832	0.758/19.253
Luer Slip	3 cc	2.743/69.672	0.372/9.448	0.468/11.887	0.848/21.539
Luer Slip	5 cc	3.079/78.206	0.478/12.141	0.553/14.046	1.058/26.873
Luer Slip	10 cc	3.871/98.323	0.579/14.706	0.661/16.789	1.157/29.387

TAPER TIP	SIZE	LENGTH (INCH/MM)	ID (INCH/MM)	OD (INCH/MM)	FLANGE (INCH/MM)
Taper Tip	6 cc	3.58/90.932	0.507/12.83	0.600/15.240	1.212/30.784
Taper Tip	10 cc	4.72/119.888	0.627/15.925	0.705/17.907	1.035/26.289
Taper Tip	30 cc	5.15/130.81	0.893/22.682	1.018/25.857	1.742/44.246

