


Operating Instructions



LIGHTING THE CAMPFIRE

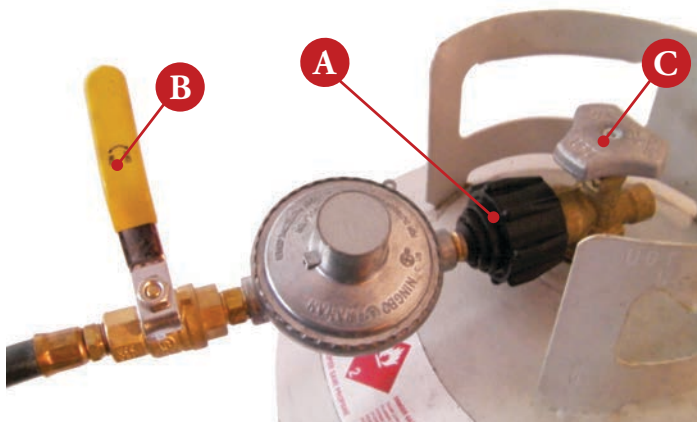

1. Attach POL/QCC (A) to tank valve. Make sure you have a good seal.
2. Close shut off valve (B) by turning clockwise.
3. Open tank valve (C); check for leaks.

Before turning gas on, apply a solution of soapy water to all hose connections. If bubbles appear when gas is turned on, shut off gas supply and tighten connections where bubbles appear. Repeat as necessary.

• Wait 5 min. before relighting, if campfire does not light.

Place lighter flame on burner and slowly open the campfire shut off valve (B), it will take a few seconds for the line to purge the air. Once the purging is complete the burner will light, then adjust the shut off valve (B) for desired fire height.

Campfire Must Be Lit Manually



TURNING THE CAMPFIRE OFF

1. Shut the gas off at the tank (C) then let the fire go out.
2. Turn the shut off valve (B) to the off position.
3. Let the campfire cool before touching or wrapping the hose around the pedestal and replacing the canister on top.