





SOLAR WALL PACK MSL-SWP14

Technical Specifications

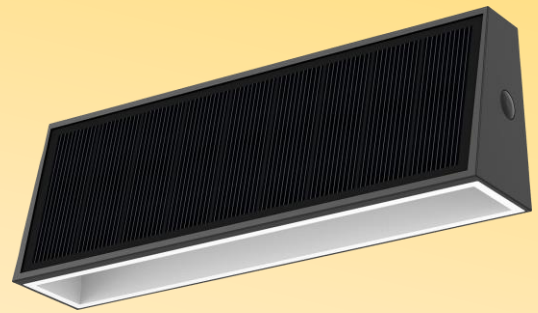


SPECIFICATIONS

Model	MSL-SWP14
Led power	4W
Luminous flux	700LM (200lm up light, 500lm down light)
Solar panel	1.3W
Lithium battery	2AH
Fixture color	Black
Color temperature	4000K
Housing material	ABS + PC
Distribution type	Rotated symmetrical 120°
Color rendering index	CRI>70
Operation Profile	Depend on solar radiation Button switch ON/OFF Always dim on 25% output, till dawn Always dim on 50% output, till dawn Always dim on 75% output, till dawn Always dim on 100% output, till dawn
Working temp.	-10C° ~ +55C° / 14F ~ 131F
IP Rating	IP44
Fixture Dimensions	178MM*64MM 7"x2.51"

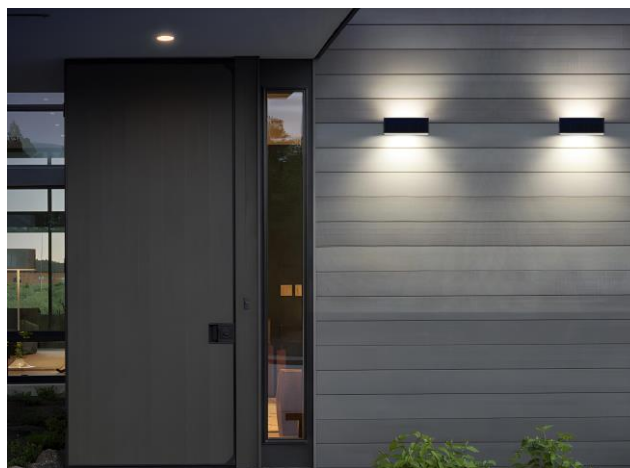


SOLAR WALL PACK MSL-SWP14

Technical Specifications

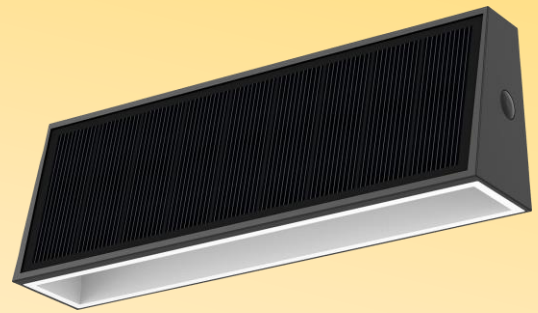

FIXTURE STRUCTURE

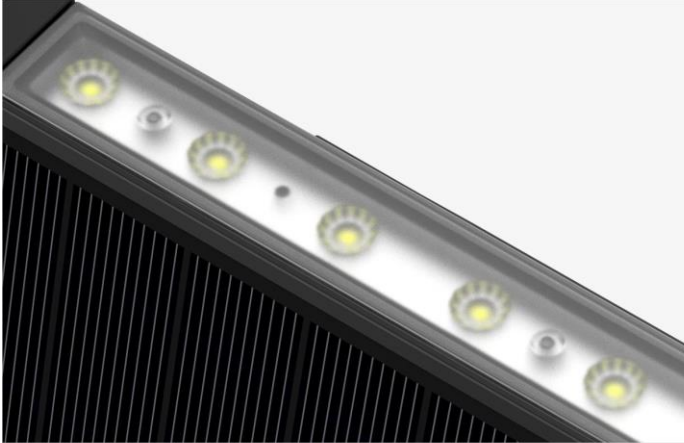

Up light (200lm)



Down light (500lm)





23% charging efficiency




Brackets

FIXTURE DIMENSIONS

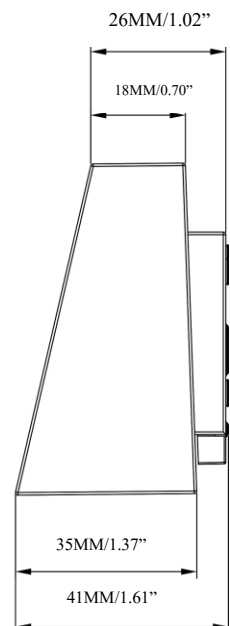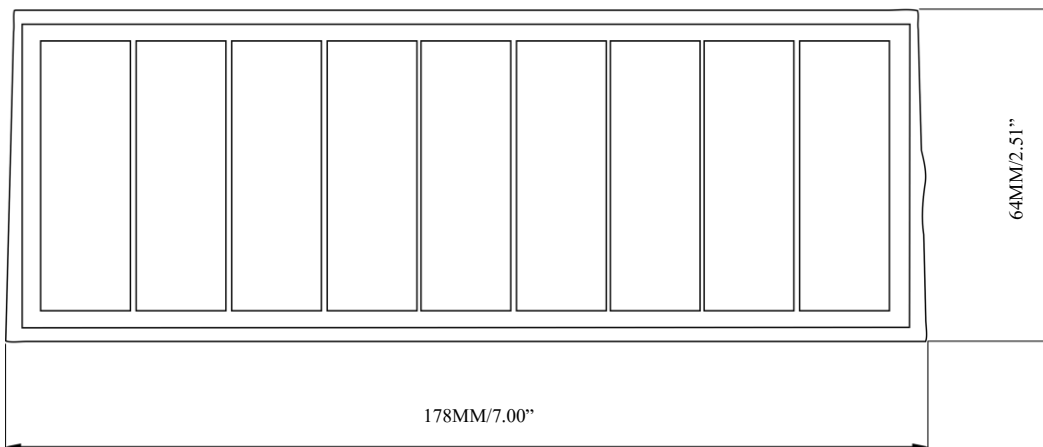

SOLAR WALL PACK MSL-SWP14


Installation Manual

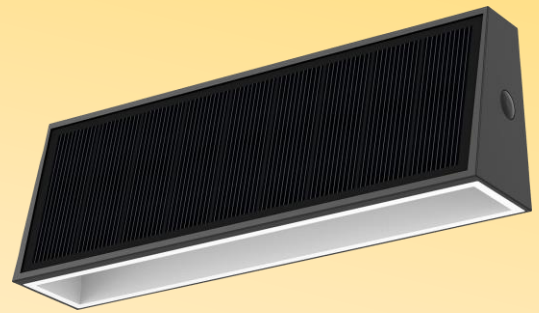


DIMENSIONS INSTALLATION INSTRUCTIONS

Fix the lamp on the wall with the screws.


1

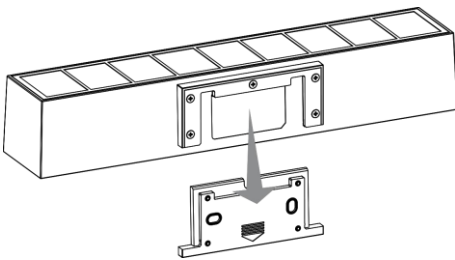


2

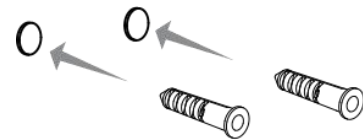

3

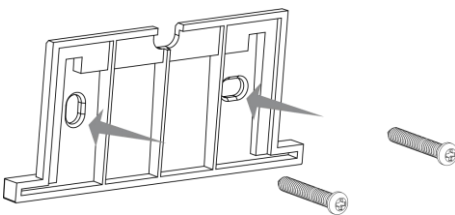

4

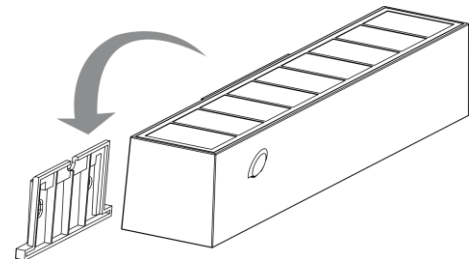

Keep the solar panel face the sunlight directly to ensure it can charge the inside Li-ion battery effectively