




HOW TO PUT THIS SHIT TOGETHER
TUSHY CLASSIC

Check out our installation video at
[HELLOTUSHY.COM/CLASSICINSTALL](https://www.hellotushy.com/classicinstall)
and some common setup hacks at
[HELLOTUSHY.COM/HACKS](https://www.hellotushy.com/hacks)

KNOW YOUR TUSHY

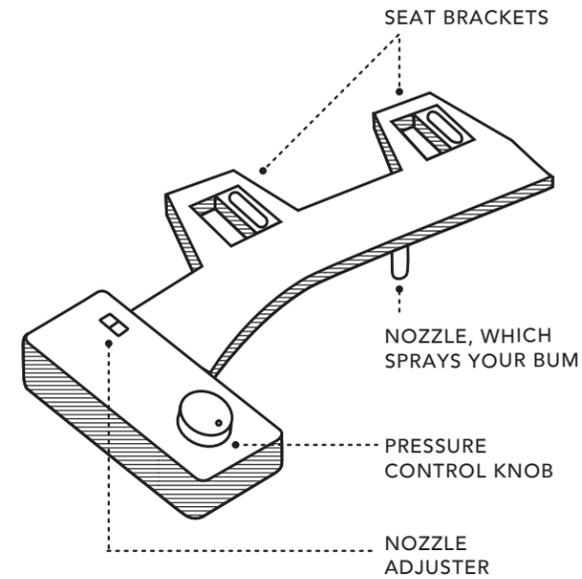

INCLUDED PARTS




YOU MIGHT ALSO NEED




PREP WORK

1. WATER VALVES




Turn off the water valve near the toilet in small increments to avoid damage, especially to older valves. There may be some mineral build up - slow and steady wins the race. Try twisting it in one direction and then the other, each time rotating a little further until it's free to turn all the way around.

2. TOILET TANK



Flush your toilet to drain the tank completely. Hold down that flusher until it empties! (A couple inches of water is okay.)

3. TOILET SEAT

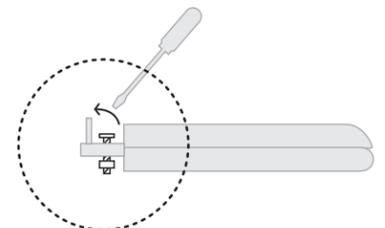

Flip up the screw caps behind the seat with a flat head screwdriver to access the screws. You may need to hold the bolt beneath the screw with your other hand while unscrewing. Remove the seat and set aside. Dealing with a unique toilet seat? Check out [HELLOTUSHY.COM/HACKS](https://www.hellotushy.com/hacks) for some tips.

CONGRATULATIONS

You have seized the bidet! Your butt, the environment and the world will be better off because of it. Install your TUSHY (using our cheeky instructions inside this lil booklet) and flaunt that shiney hiney! Happy pooping.

[HELLOTUSHY.COM](https://www.hellotushy.com)


[HELLOTUSHY.COM/CLASSICINSTALL](https://www.hellotushy.com/classicinstall)

[HELLO@TUSHY.ME](mailto:hello@tushy.me)


[FB.COM/HELLOTUSHY](https://www.facebook.com/hellotushy)

[INSTAGRAM.COM/HELLOTUSHY](https://www.instagram.com/hellotushy)


4. COOL WATER CONNECTION




Disconnect the existing flexible hose from your toilet tank. To unscrew the connection, turn right. (If you have a hard pipe, visit [HELLOTUSHY.COM/PARTS](https://www.hellotushy.com/parts) to get a flexible hose.)




Place the rubber washer in the adapter. Screw the adapter onto the tank connection and then attach the flexible hose to the bottom of the adapter. Do not over tighten. **Optional:** Use teflon tape inside each connection. *



Attach the flexible hose to the adapter for connection to your Tushy. Use a wrench to tighten it if necessary. **

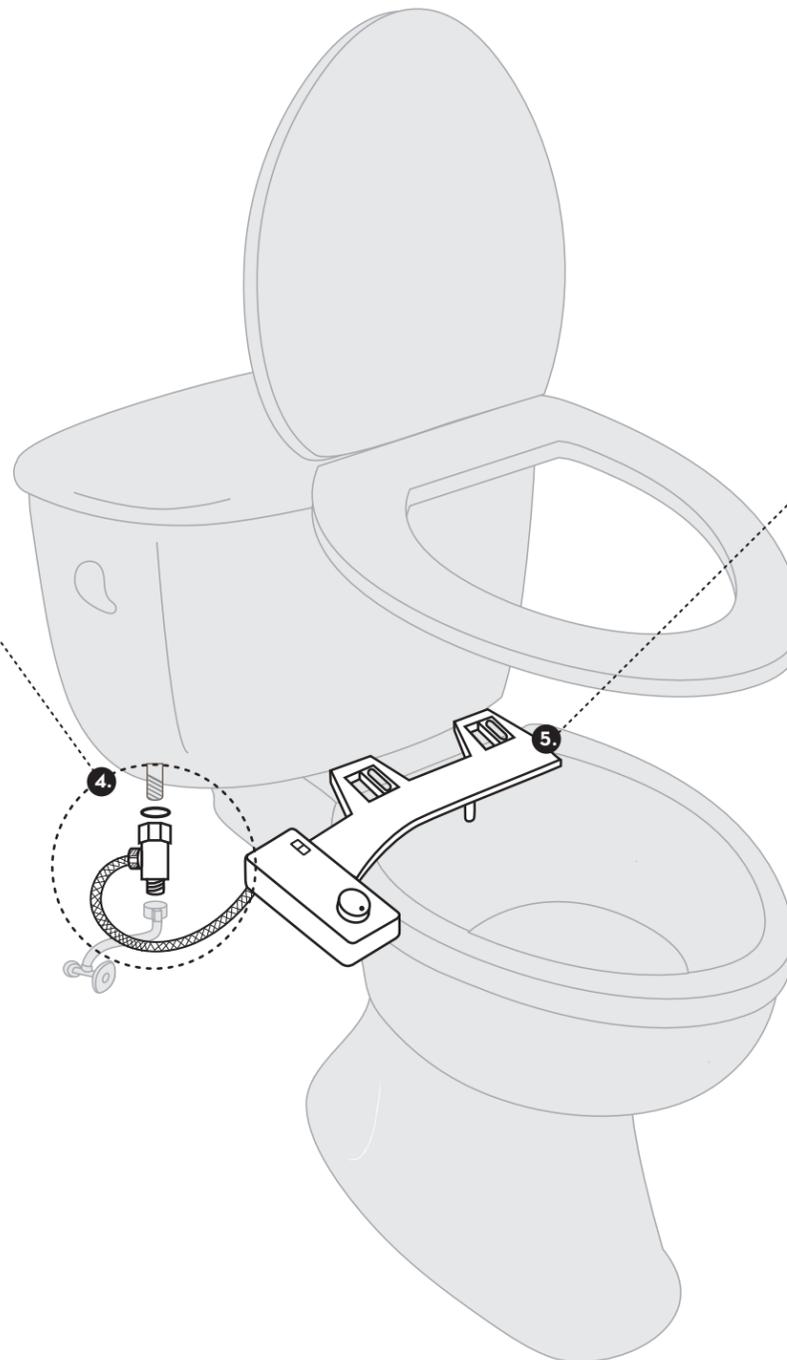

5. FINISHING UP



Connect the other end of the flexible hose to the port under your Tushy.

Make sure all the connections are secure and turn on the water supply. Use teflon tape if there are any leaks.

Now for the big moment ... place the TUSHY on top of your toilet and align the seat brackets with your toilet seat mounting holes. **(Optional:** Use the rubber pads provided between the toilet seat mounting holes and TUSHY to prevent the seat from moving after attaching over TUSHY)

Make sure the nozzle is centered to your toilet bowl for that precise spray of water. Secure the toilet seat on top of the TUSHY by threading the toilet seat bolts through the seat fasteners and the mounting holes. ***

Now sit down, relax, doo your business. Use the pressure control knob & let the spray begin!

Email us your questions at support@tushy.me
We've got your back!

*

PSST!

Over-tightening the adapter can cause damage to the threads and result in water leakage, so use only hand pressure at first. Rotate less than a quarter turn at a time, checking as you go for leaks.

**

Leaky joints?

Plug these freaky leaky connections by wrapping teflon tape on the threading of the pipe clockwise while maintaining some tension on it. Leave some room at the end so that there is no fraying of the tape when you are securing the adapters. [hellotushy.com/tape](https://www.hellotushy.com/tape)

Leg room for the nozzle

Make sure that the bidet sits far enough from the rim of the toilet bowl so the nozzle has enough room to swing up and back. You can do by just playing with the nozzle adjuster on the bidet console.

