


# KNOW YOUR TUSHY

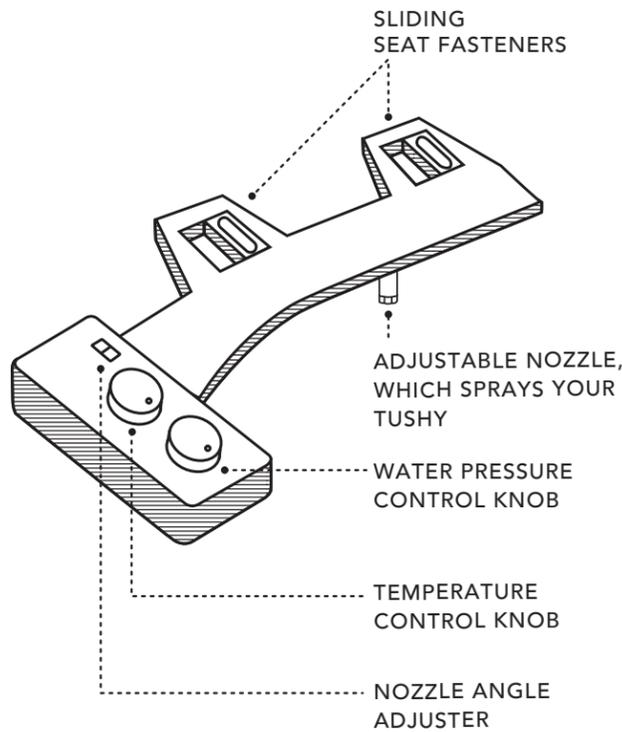

# HOW TO PUT THIS SH\*T TOGETHER


TUSHY SPA

Check out our installation video at [HELLOTUSHY.COM/SPAINSTALL](https://www.hellotushy.com/spainstall) and some common setup tips at [HELLOTUSHY.COM/HACKS](https://www.hellotushy.com/hacks)


TUSHY




## INCLUDED PARTS

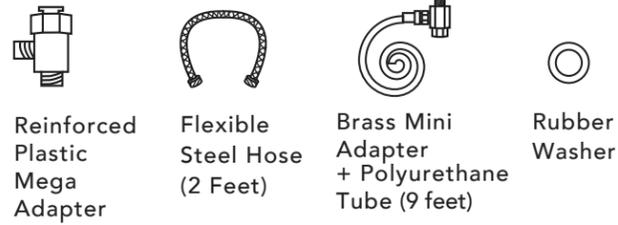

## EXTRAS

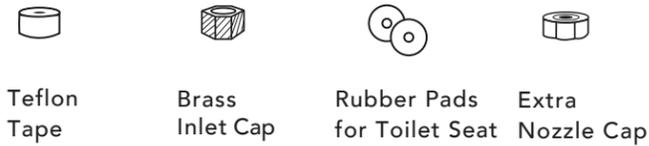

## YOU ALSO NEED




Have a question? Don't be shy!  
Email us your questions at [SUPPORT@HELLOTUSHY.COM](mailto:support@hellotushy.com)

## BEFORE YOU START CHECK YOUR TOILET


### What kind of connection does your toilet have?

If you have a flushometer toilet (left), skirted toilet (right) or an unreachable connection, check out [HELLOTUSHY.COM/HACKS](https://www.hellotushy.com/hacks) for some tips.

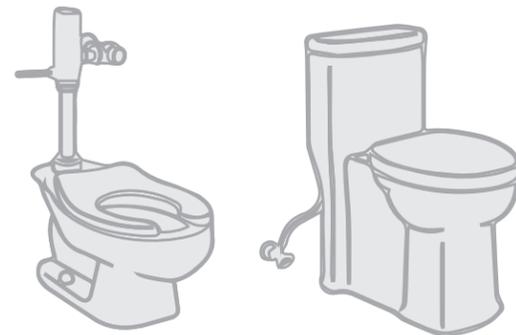

### Do you have a metal pipe instead of a flexible hose?

No problem, visit [HELLOTUSHY.COM/PARTS](https://www.hellotushy.com/parts) or your local hardware store to get a flexible hose. You'll want a flexible steel hose that's 3/8" x 7/8".




## 1. WATER VALVES, TOILET AND SINK

- 1a.** Turn off the warm water valve beneath the sink by turning clockwise.
- 
- 1b.** Then, turn off the water valve beside the toilet by turning clockwise. If the valves are tight, there may be some mineral build up (white calcification) - slow and steady wins the race. If it's stuck, try twisting it in one direction and then the other, each time rotating a little further until it's free to turn all the way around.
- 

## 2. TOILET TANK

Flush your toilet to drain the tank completely. Hold down that flusher until the tank empties nearly completely! A couple inches of water at the bottom of the tank is okay, though.




## 4. COOL WATER CONNECTION

- 4a.** Disconnect the existing flexible hose from your toilet tank by turning it counter clockwise, disconnecting it from the bolt under the tank.
- 
- 4b.** Attach the flexible hose to the bottom of the mega adapter and then screw the top of the mega adapter clockwise onto the tank connection. Be careful not to over-tighten! \*\*
- 
- 4c.** Attach the flexible steel hose to the mega adapter side connection. Use a wrench to tighten it if necessary, but remember: don't over-tighten! \*\*
- 


## 3. TOILET SEAT

Flip up the screw caps behind the seat with a flat head screwdriver to access the screws. You may need to hold the bolt on the underside of the screw with your other hand while unscrewing. Remove the seat and set aside.

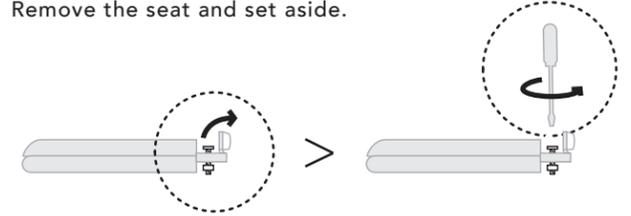

### Dealing with a unique quick-release or mounted toilet seat?

There's a super easy fix. Just remove those toilet seat mounts and place them on top of the TUSHY. Once they're reattached above the TUSHY, you can place the toilet seat back onto the mounts! Check out [HELLOTUSHY.COM/HACKS](https://www.hellotushy.com/hacks) for some more tips/videos.

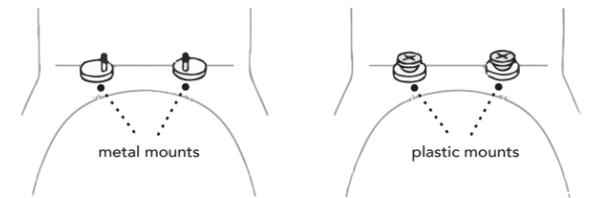

## 5. WARM WATER CONNECTION \*


5a.



Disconnect the existing flexible steel hose from the warm water supply valve by turning it counter clockwise.

**Do you have a metal pipe?**  
No problem, visit [HELLOTUSHY.COM/PARTS](http://HELLOTUSHY.COM/PARTS) or your local hardware store to get a flexible hose. (You'll want a flexible steel hose that's 3/8" x 7/8".)

5b.



Place the rubber washer inside the mini adapter. Fasten the mini adapter to the warm water supply valve by turning clockwise first using your hand and then using a wrench. Make sure it's tight, but don't go nuts. \*\*\*

**Optional:** Use teflon tape inside each connection if it's leaking, or for extra security.

5c.



Reconnect the warm water hose to the top of the mini adapter by turning clockwise using your hand and then using a wrench. Again, make sure it's tight, but don't go nuts.

## 6. FINISHING UP WATER CONNECTIONS


6a.

### CHECKING FOR LEAKS


Take both the flexible steel hose and the plastic tube and point the open ends into the toilet. Turn on and off each water valve one at a time to check the water connections. If you're leak-free, proceed on; if not, check the tightness of the connections \*\* or wrap the connections in teflon tape. \*\*\*

6b.


### WARM WATER CONNECTION



Unscrew the plastic fastener from the hot water port on the underside of the TUSHY console. Thread the other end of the plastic tube through the plastic fastener.




Next, place or twist the plastic tube onto the hot water port under your TUSHY. (If needed, you can soften the end of the tube with hot water or a hair dryer.)





Finally, tighten the plastic fastener clockwise to the hot water port sealing the connection.

6c.

### COOL WATER CONNECTION



Affix the flexible steel hose from the mega adapter to the cold water port on the underside of the TUSHY console.

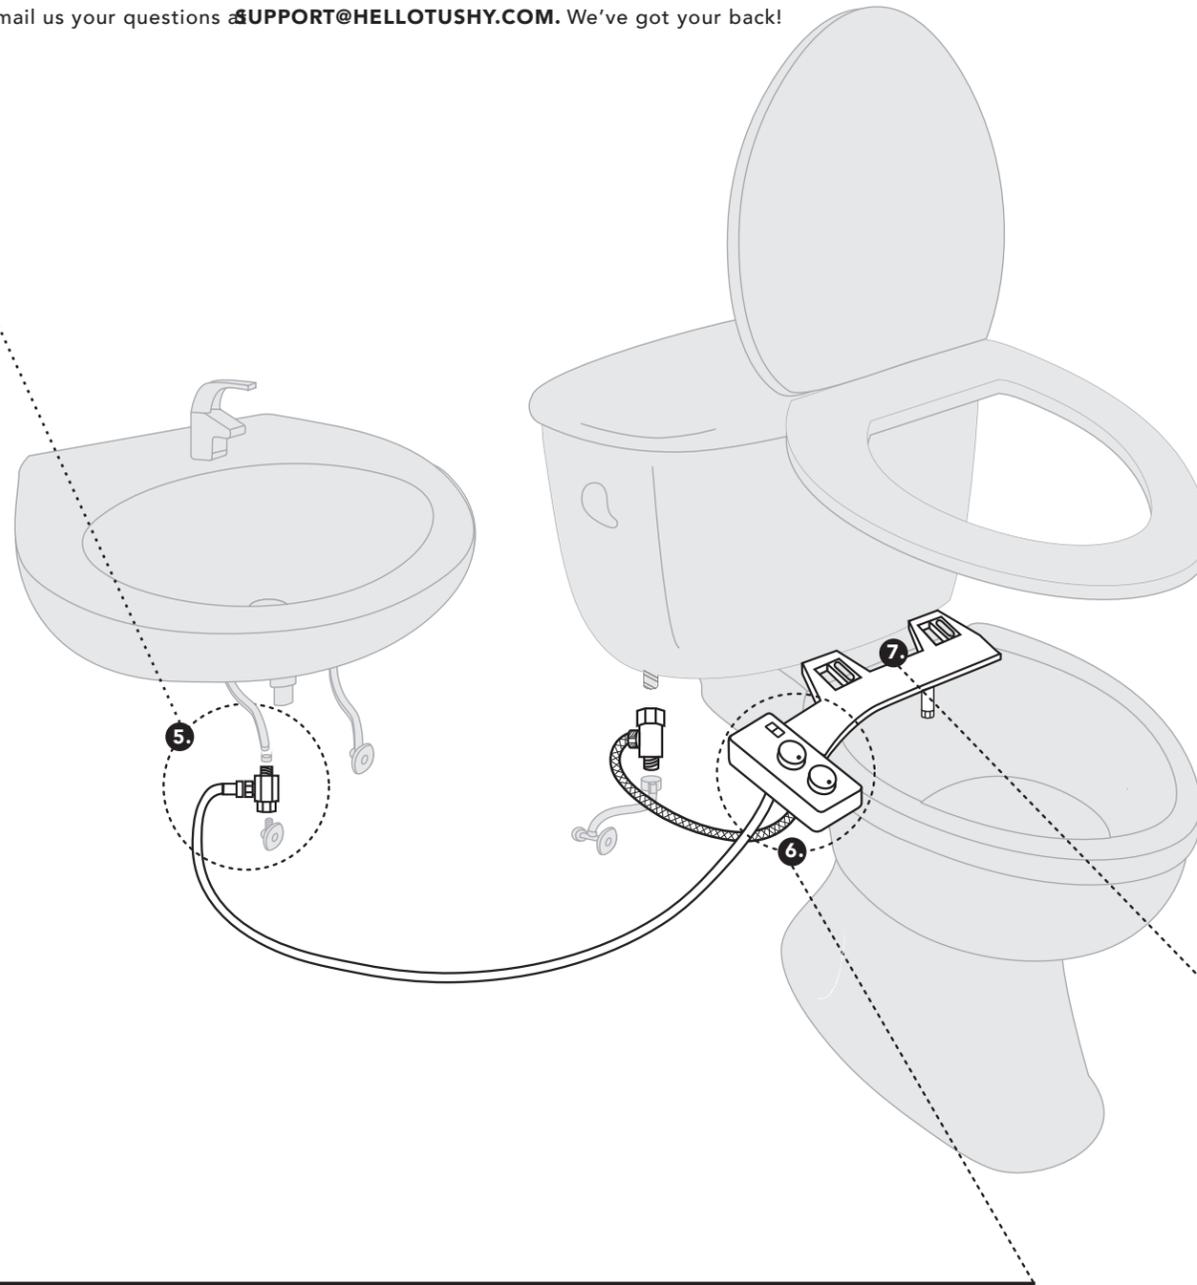

\*

### WARM WATER CONNECTION DIDN'T WORK OUT?

We'll convert yours to a Classic. Let's replace the plastic barb from the warm water port with the inlet cap provided in the box. Pull out the barb and screw on the cap. Voila! You can save the hot water part of the installation for another toilet, another day and still use TUSHY. Visit [HELLOTUSHY.COM/HACKS](http://HELLOTUSHY.COM/HACKS) for a how-to video.

\*\*

### PSST! NOT TOO TIGHT!

Over tightening the adapter can cause damage to the threads and result in water leakage, so use only hand pressure at first.

\*\*\*

### LEAKY JOINTS?

Plug these freaky leaky connections by wrapping teflon tape on the threading of the pipe clockwise while maintaining some tension.

Visit [HELLOTUSHY.COM/TAPE](http://HELLOTUSHY.COM/TAPE) for more details.


\*\*\*\*

### GIVE THE NOZZLE SOME BREATHING ROOM

Leave enough space between the rim of the toilet bowl and the bidet nozzle. Otherwise, it won't be able to adjust spray angles! You can figure out how much space you need by playing with the nozzle adjuster on the bidet console.

## 7. ATTACHING TO THE BOWL


7a.



Now for the big moment... place the TUSHY on top of your toilet and line up the sliding seat fasteners with the holes in between the bowl and the tank used for mounting the toilet seat.


**Tip:** Place the rubber pads, provided in the box, over the holes on the toilet and then place the TUSHY on top for extra grip to limit seat movement.

7b.



Make sure the nozzle is lined up in the center of the back and not too close to the edge of the bowl to allow room for it to be adjusted in use.

7c.



Reattach the toilet seat on top of the TUSHY by threading the toilet seat bolts through the sliding seat fasteners and through the toilet's mounting holes. Fasten the bolts by turning them clockwise.

**Tip:** Hold the underside toilet nuts to tighten from the top more effectively. \*\*\*\*