



Easy Replacement and Installation Instructions

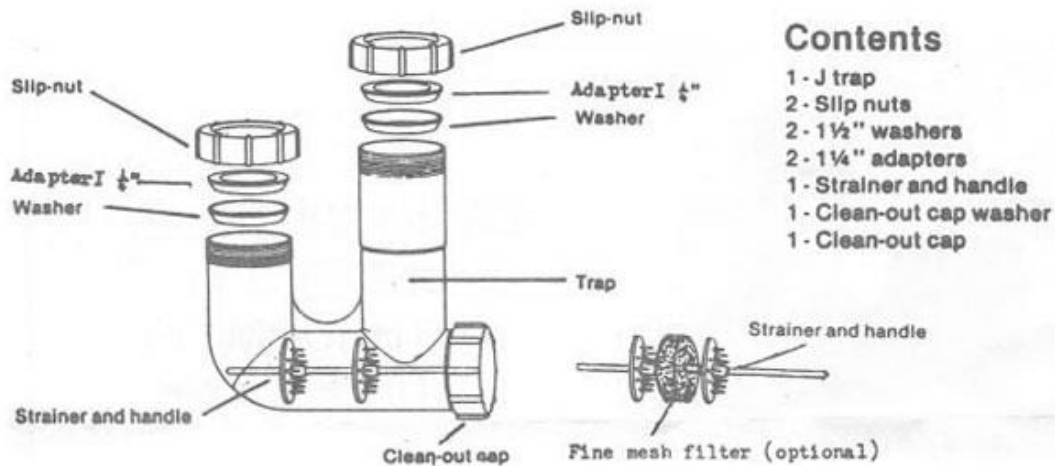

Contents


- 1 - J trap
- 2 - Slip nuts
- 2 - 1 1/2\" washers
- 2 - 1 1/4\" adapters
- 1 - Strainer and handle
- 1 - Clean-out cap washer
- 1 - Clean-out cap



Removal of Old Drain Bend

Unscrew old slip nuts and pull firmly down on old drain bend. You are now ready to install your new Trap.

1. Put new slip-nuts over existing pipe
2. Install new Trap-It
3. For 1 1/4\" pipe, use adapter washers that are enclosed
4. Tighten slip nuts with hand
5. Run water; if leak occurs, tighten with tool
6. CAUTION: do not over-tighten
7. For use with a kitchen disposal, remove strainer

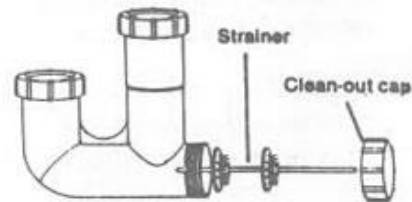

To Clean-out Trap

1. Just remove clean-out cap by unscrewing
2. Pull strainer handle from trap and remove all objects caught
3. Replace strainer and clean-out cap

Made in U.S.A.