K4178 Plumbing Spec Sheet



Plumbing Spec Sheet:

- This spec sheet will cover the K4178 shampoo chair.
- For product dimensions please refer to our websites "Product Specifications" of your shampoo unit.
- All specs are approximate with some tolerances taken.

Note: A professional plumber should be employed to assemble this shampoo unit. This unit is ideal for tile and concrete floors. Wood floors should not be used without a waterproof rubber mat.





Distance from back of the bowl to the center of the drain is 8 inches.

Note: The back of the bowl has a curve and measurement is taken at the center of the bowl.

Workable space inside dimensions are 11 inches deep, 13 inches wide and 12 inches high.

The porcelain bowl mount is 12 inches deep.

The space from the top of the porcelain bowl mount to the floor is 25.5 inches.

Side to side measurement of the porcelain bowl mount is 20 inches.


Note: The porcelain bowl mount is a metal plate that covered with a plastic shroud.

Note: We recommend you place the shampoo unit minimum 30 inches from the wall.

Note: Back panel can be modified for wall mounted plumbing. Please refer to the final note at the end.






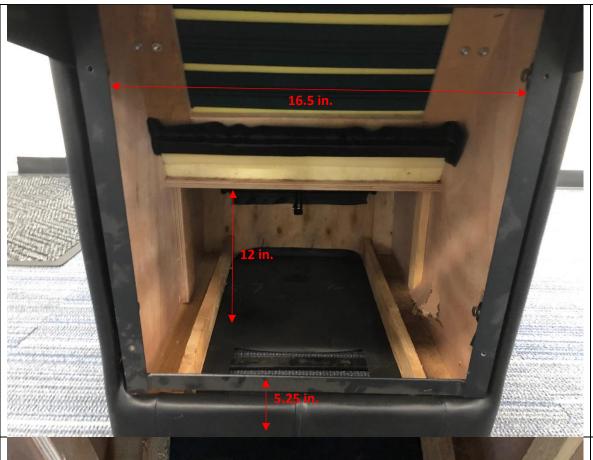

Inside to inside metal bracket measurement is 16.5 inches.

Cloth to lower seat frame measurement is 12 inches.

Bottom of the unit to lower metal bracket is 5.25 inches.

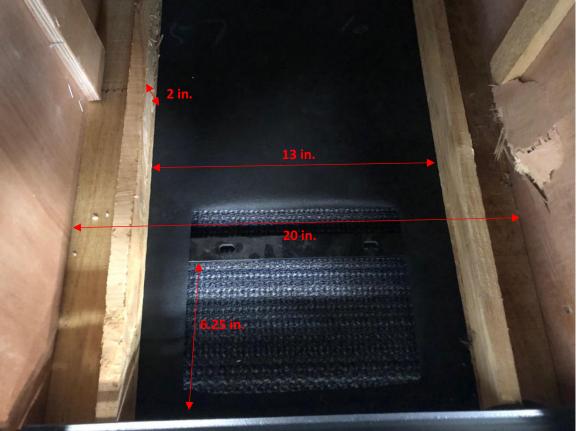

The open space from wall to wall is 20 inches.

The wood supports on the left and right are 2 inches high.

The space between the wood supports is 13 inches.

The space from the inside edge to the metal bracket is 6.25 inches.


Note: The black cloth material on the inside edge to metal bracket can be trimmed to accommodate for any extra space you may need.





Note: Check your local building codes to determine if a vacuum breaker is necessary for your shampoo unit.



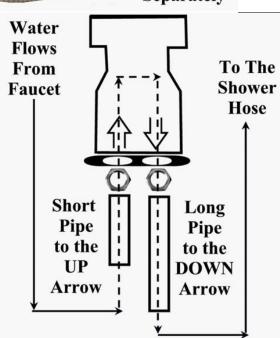

A vacuum breaker prevents water from being siphoned backwards and pressure drop in the public drinking water.

Should the supply pressure drop, the disc springs back, opening the vent holes (which let in outside air), and preventing backflow of water.

Note: Water Pressure at the faucet should never exceed 60PSI. Optimal operating pressure should be 30 to 40 PSI.



Note: Keller International does <u>NOT</u> claim any responsibility for damages due to modifications done to the shampoo unit or damages due to negligence and any damages from improper setup to the plumbing done for this shampoo unit.

