K4400 Plumbing Spec Sheet



Plumbing Spec Sheet:

- This spec sheet will cover the K4400 shampoo chair.
- For product dimensions please refer to our websites "Product Specifications" of your shampoo unit.
- All specs are approximate with some tolerances taken.

Note: A professional plumber should be employed to assemble this shampoo unit. This unit is ideal for tile and concrete floors. Wood floors should not be used without a waterproof rubber mat.



Distance from back of the bowl to the center of the drain is 8 inches.

Note: The back of the bowl has a curve and measurement is taken at the center of the bowl.

Workable space inside dimensions are 17 inches deep, 20 inches wide and 18 inches high.

The porcelain bowl mount is 14.5 inches deep.


The space from the top of the porcelain bowl mount to the floor is 24 inches.

Side to side measurement of the porcelain bowl mount is 20.5 inches.

Note: We recommend you place the shampoo unit minimum 30 inches from the wall.

Note: Back panel can be modified for wall mounted plumbing. Please refer to the final note at the end.



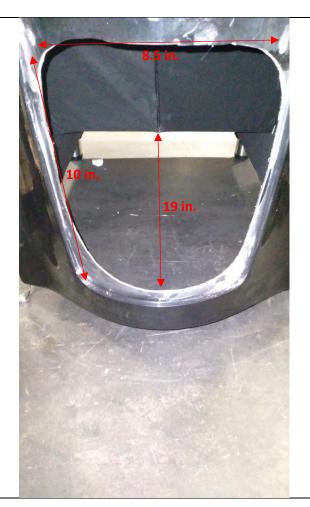


Opening measurements from side to side are 8.5 inches.

Opening measurements from top to bottom are 10 inches.


Measurement from the opening to the underside of the seat is 19 inches.

Note: Measurement was taken from the center of the opening. The opening is curved so the measurement will vary depending where it is taken.

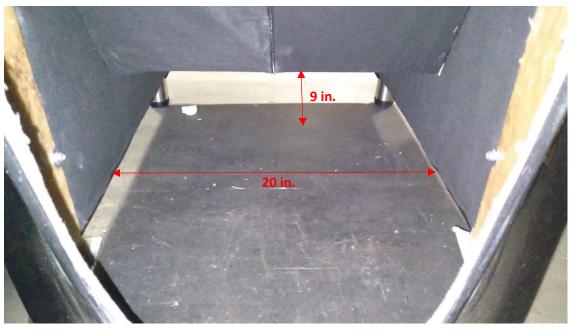

Measurement from the underside of the seat to the floor is 9 inches.

Measurement from side to side is 20 inches.

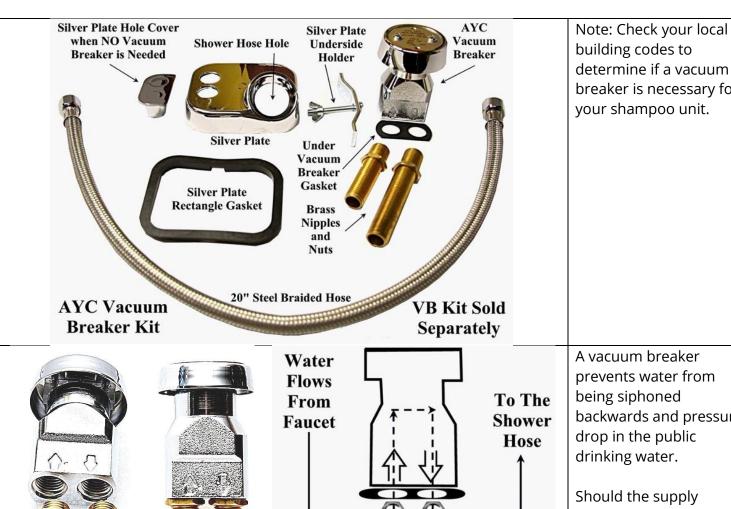

Short

Pipe

to the

UP

Arrow

Long

Pipe

to the

DOWN

Arrow

building codes to determine if a vacuum breaker is necessary for your shampoo unit.

A vacuum breaker prevents water from being siphoned backwards and pressure drop in the public drinking water.

Should the supply pressure drop, the disc springs back, opening the vent holes (which let in outside air), and preventing backflow of water.

Note: Water Pressure at the faucet should never exceed 60PSI. Optimal operating pressure should be 30 to 40 PSI.

AYC

Vacuum Breaker

with

Hardware



Note: Keller International does <u>NOT</u> claim any responsibility for damages due to modifications done to the shampoo unit or damages due to negligence and any damages from improper setup to the plumbing done for this shampoo unit.