


Permanent Split Capacitor Double Shaft Fan & Blower

5.6" Diameter, Two & Three Speed

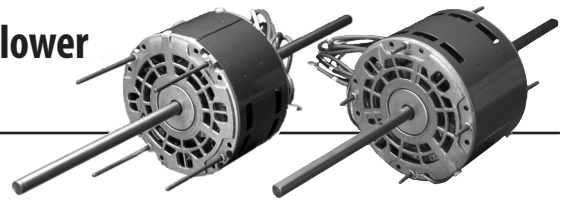

APPLICATIONS:

Design to meet manufacturer's requirements for blowers utilizing a double-shaft motor.

FEATURES:

- Open Dripproof, Air Over, Except Where Noted
- Automatic Reset Thermal Overload Protector
- CCW Rotation Lead End
- Sleeve Bearings Have All Angle Thrust System
- Continuous Duty, Air Over
- Green Ground Lead
- Connection and Capacitor Information Furnished on Nameplate
- Designed for Use with 370V Capacitors
- Hub Rings are 2 1/4" Diameter, Furnished Detached, with Extra Metal Outer Rings for Adapting to 2 1/2" Diameter
- Mounting Holes in Shell for Mounting Capacitor
- When Supplied, Capacitor and Mounting Hardware are Supplied Detached
- 20" Leads
- Class B Insulation
- **Discount Symbol: DS-3HAC**




Figure A




Figure B

Stud Mount, Without Capacitor and Mounting Kit, Three Speed, Economizer® High Efficiency (Fig. A)

HP	RPM/ Spds.	Volts	Catalog Number	List Price	Bearings	Cap MFD	Amps	Shaft N	Shaft XN	Shell XI	Total C	Ship Wgt.	Notes	OEM
1/4	1625/3	230	8725	\$262	Slv	6.0	1.6	7.0	7.0	4.1	18.1	12		
1/8	1075/3	115	1186	\$259	Slv	5.0	2.1	6.0	6.0	3.9	15.8	12	H45	
	1075/3	208-230	1187	\$263	Slv	5.0	0.9	6.0	6.0	3.9	15.8	12	H45	
1/3	1625/3	230	8726	\$271	Slv	7.5	1.9	7.0	7.0	4.3	18.3	13		

Resilient Mounting With Capacitor and Mounting Kit, Two Speed (Fig. B)

HP	RPM/ Spds.	Volts	Catalog Number	List Price	Bearings	Cap MFD	Amps	Shaft N	Shaft XN	Shell XI	Total C	Ship Wgt.	Notes	OEM
1/4	1075/2	115	1244	\$200	Slv	5.0	4.4	7.0	7.0	4.4	19.4	16	RB	
	1625/2	115	1242	\$212	Slv	3.0	3.6	7.0	7.0	3.9	18.9	13	RB	
	1625/2	230	1243	\$218	Slv	3.0	1.8	7.0	7.0	3.9	18.9	12	RB	
1/2	1075/2	230	1248	\$149	Slv	5.0	3.8	7.0	7.0	4.9	19.9	19	RB	

Hub or Stud Mount (Except Where Noted), With Capacitor and Mounting Kit, Three Speed (Fig. B)

HP	RPM/ Spds.	Volts	Catalog Number	List Price	Bearings	Cap MFD	Amps	Shaft N	Shaft XN	Shell XI	Total C	Ship Wgt.	Notes	OEM
1/6	1075/3	115	1216	\$195	Slv	5.0	3.0	8.0	8.0	3.6	20.1	12		
	1075/3	115	1240	\$187	Slv	5.0	2.9	7.0	7.0	3.7	18.7	12	RB	
1/3	1625/3	230	1887	\$271	Slv	5.0	2.2	8.0	8.0	4.3	20.8	13		
	1075/3	230	1213	\$201	Slv	5.0	2.5	8.0	8.0	4.3	20.1	18		
	1075/3	230	5108	\$206	Slv	5.0	2.3	4.3	4.6	4.3	14.2	16		WP
	1075/3	230	1247	\$224	Slv	5.0	2.5	7.0	7.0	4.7	19.7	18	RB	
1/2	1075/3	230	1824	\$235	Slv	5.0	4.5	8.0	8.0	5.4	22.0	19		

Hub or Stud Mount, Without Capacitor and Mounting Kit*, Three Speed (Fig. B)

HP	RPM/ Spds.	Volts	Catalog Number	List Price	Bearings	Cap MFD	Amps	Shaft N	Shaft XN	Shell XI	Total C	Ship Wgt.	Notes	OEM
1/8	1075/3	115	8523	\$199	Slv	5.0	2.1	7.0	9.0	3.7	20.1	11		
1/6	1075/3	115	12160	\$124	Slv	5.0	3.0	8.0	8.0	3.6	20.1	11		
	1075/3	230	3133	\$126	Slv	4.0	1.5	8.0	8.0	3.8	20.4	12		
1/4	1075/3	230	3134	\$189	Slv	5.0	1.9	8.0	8.0	4.6	20.1	13		
1/3	1075/3	230	3135	\$145	Slv	5.0	2.5	8.0	8.0	4.6	21.1	14		
1/2	1075/3	230	3136	\$158	Slv	5.0	4.5	8.0	8.0	5.4	22.0	20		

WP = Whirlpool *To Make Resilient Mount, Order Kits 27 and 4. See Pages 172-173.

Note H45 Totally Enclosed Air Over

Note RB Resilient Mounting

† All marks shown within this document are properties of their respective owners

