# nut on both sides connection type: basic set min. operating pressure: 1 bar

max. operating pressure: 10 bar

· consists of: Thermostat, shower holder

 depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut

· Select push-button on/off control for 3 outlets

simultaneous use of several outlets
maximum flow rate at 3 bar: 26 l/min

· Button: Thermostat is delivered with buttons hand shower, Waterfall, Rain large

· hose nut: for shower hoses with conical or cylindrical

- scope of supply: Thermostat, mixing unit, mounting material, assembly instruction
- not included: basic set

**Product image** 



## hansgrohe

#### RainSelect

Description

product features

off function

3 functions


safety lock at 40° C

.

### Thermostat for concealed installation for 3 functions with integrated shower holderSurfaces: ChromeArticle Number: 15356000

1-1-18-X



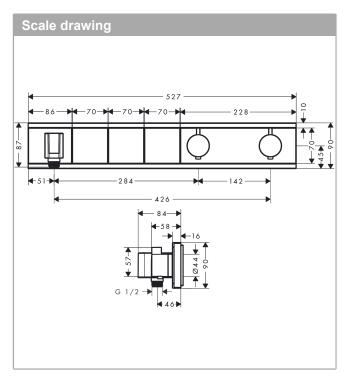

### hansgrohe

#### RainSelect Thermostat for concealed installation for 3 functions with integrated shower holder Surfaces: Chrome Article Number: 15356000

D-D-N-N

#### Installation examples

