

## Ecostat E

### Bath thermostat for exposed installation

Surfaces: **Chrome** Article Number: **15774000**



#### Description

##### product features

- 2 functions
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer
- EcoStop button limits the water consumption to 9 l/min
- flow rate for bath spout at 3 bar: 18,6 l/min
- flow rate of hand shower at 3 bar: 15,4 l/min
- Minimum flow pressure: 1 bar
- min. operating pressure: 1 bar
- safety lock at 40° C
- connection type: s-shaped connections
- scope of supply: Bath thermostat, S-connections, mounting material, assembly instruction

#### Technology



#### Design awards




reddot award 2019  
winner


#### Product image



#### Scale drawing

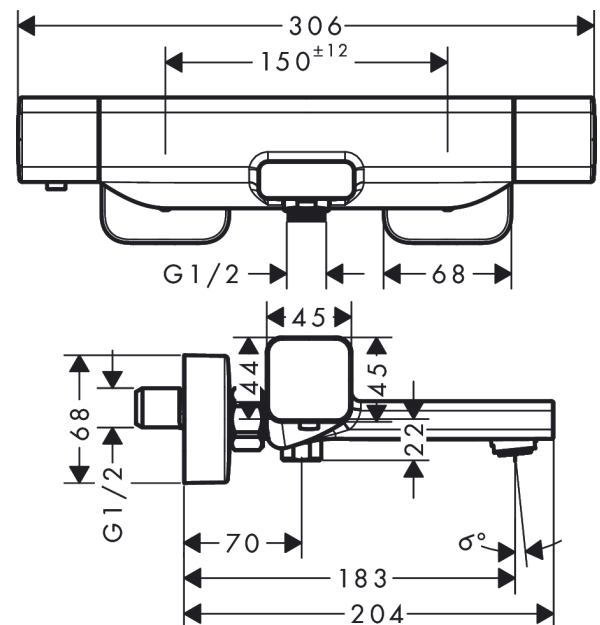

#### Flowchart



- ① Shower outlet with 1B-resistance
- ② Bath spout