

## GEMINUS

INTEGRATED LINEAR LED LIGHT

OrbitX Direct Drive Technology Onboard

Lowest cost  
Uncompromised OrbitX quality




### Dimensions



### Configurations

1200 mm
32 W 4000 lm

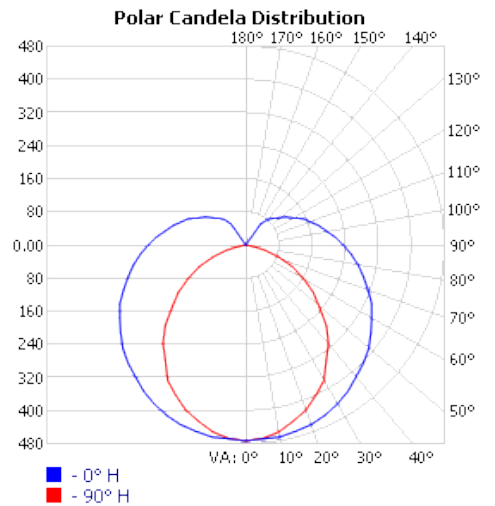

## Guarantee

Operational Guarantee (365d x 24h)	6 years
Light Output Guarantee (365d x 24h)	3 years

## Lifetime

Nominal Lifetime (L70) IES LM-80, TM-21	60 000 hours
--	--------------

## Photometric Data

Luminous Efficacy	133lm/W
Correlated Colour Temperature (CCT)	5000K (options available)
Colour Rendering Index (CRI)	83
Gamut Area Index (GAI)	96
Light Quality	Type A compliant (Lighting Research Centre, New York)
Beam Angle	210°
Stroboscopic Effect (100Hz)	80% flicker free (complies to OHS and MHS Act regulations)

## Electrical Data

Power	See list
Power Factor	>0.98
Operating Voltage	220-240V AC
Minimum Sustained Voltage	No minimum limit, operational from 150V
Maximum Sustained Voltage	250V for 1 minute
On/Off Switching	Unlimited
Delay to Full Brightness	Immediate

## Temperature

T Ambient (max)	+30°C
T Ambient (min)	-40°C

## Safety

Risk of Breakage	Low, polycarbonate housing extruded to 1mm (no glass)
Electrical	IEC60598-1, IEC60598-2-5 compliant
Surge Protection	1.5kV
Fire Rating	UL-94 VO compliant (no flaming droplets)
IP Rating	IP20





## Interference Compliance

Wifi, Barcode Scanner, Radio Frequency Interference	No interference, IEC 61547, SANS 215 (CISPR15) compliant
Total Harmonic Distortion	IEC 61000-3-2 Class D Compliant

## Additional

Install option	Mounted to ceiling with metal clips
----------------	-------------------------------------

Specification tolerance +-10%

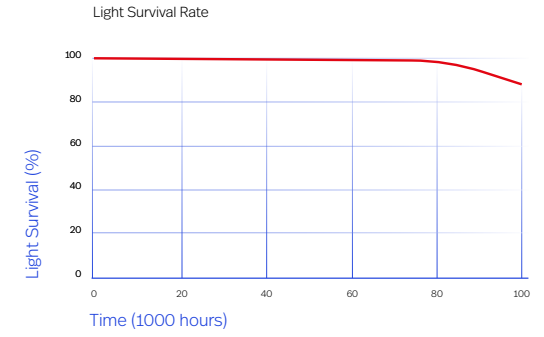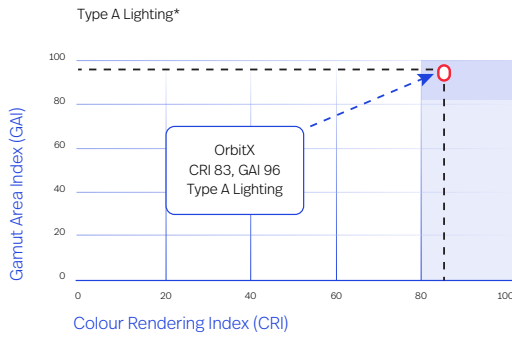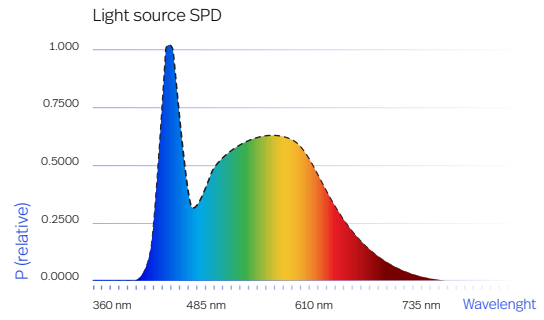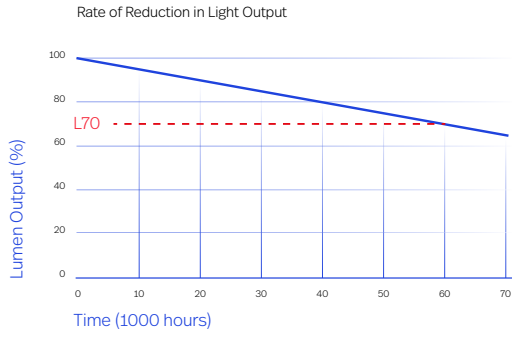

\*Type A Lighting as defined by the Lighting Research Centre, New York

Model Code	Length of Light mm	Power Rating	Units per Box	Box Dimension (l x w x h) mm	Weight (Kg)	IES Files
OXGM1200325	1200 mm	32 W	15	1280 x 185 x 185	10.12	<a href="#">Click to download</a>