



MURAFLO

*PRODUCT: SHOWER TRAY w/CURB – ALL SIZES
COLLECTION: SOFT STONE – ALL COLORS*

MANUFACTURER

MuraFlo

844-MUR-AFLO (687-2356)

<https://www.muraflo.com>

DESCRIPTION

Fully finished tiled and grouted shower tray combining a structural base, with tile, mosaic, trim, and grout.

COLORS & FINISHES

Soft Stone Collection is available in 2 colors. Each color combines ceramic square mosaic with porcelain curb tile, rounded curb trim, and grout.

STRUCTURAL BASE

Strong, lightweight, one-piece, composite core.

Waterproof and sealed on all surfaces.

Integrated flange that extends over the curb.

Tray pitched to drain location.

Pre-installed drain.

PACKAGING

Cardboard box with protective foam inserts.

WEIGHT (BASE WITH FINISH MATERIALS)

42 - 70 lbs.

(Weight is nominal and varies per tray size.)

SOFT STONE COLLECTION – ALL COLORS

Images showcase a center drain. 60" width shower trays also available with side drain placement.



Cool Tones






Warm Notes




STANDARD SIZES & DRAIN LOCATIONS

Dimensions	Center Drain	Left Drain	Right Drain	All
W" x D" Measured from edges of tray (left, right, back, front)	X" Measured from left or right edge to center	X" Measured from left edge to center of drain	X" Measured from right edge to center of drain	Y" Measured from back of tray to center of drain
36 x 36	18	N/A	N/A	17
48 x 32	24	N/A	N/A	15
48 x 34	24	N/A	N/A	16
48 x 36	24	N/A	N/A	17
60 x 30	30	8	8	14
60 x 32	30	8	8	15
60 x 34	30	8	8	16
60 x 36	30	8	8	17


Tolerances: W = $\pm \frac{1}{8}$ "; D = + tile thickness; X = $\pm \frac{1}{8}$ "; Y = $\pm \frac{1}{8}$ "

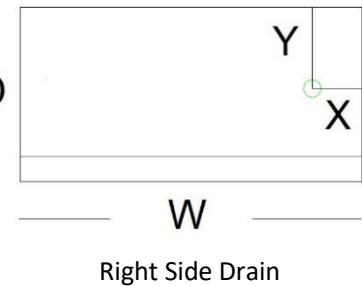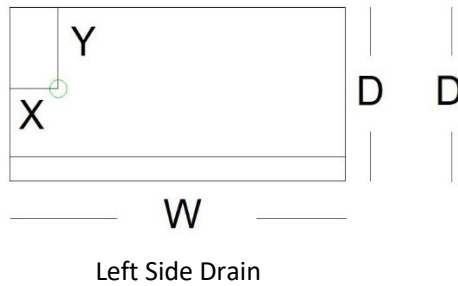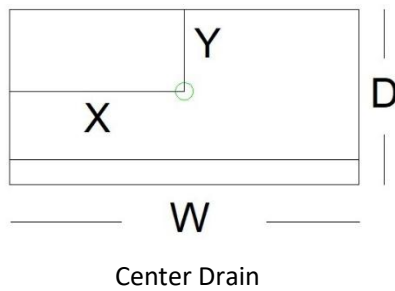

SIDE VIEW DIMENSIONS

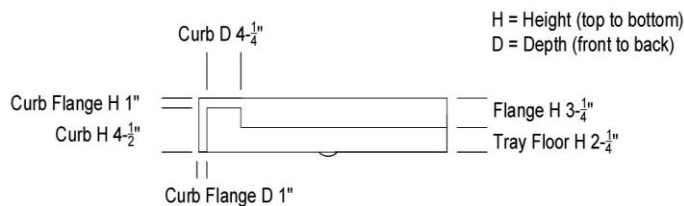

Tolerances: Flange H = $\pm \frac{1}{8}$ " - Tray Floor H = $\pm \frac{1}{4}$ " - Curb H = $\pm \frac{1}{4}$ " - Curb D = $\pm \frac{1}{4}$ "

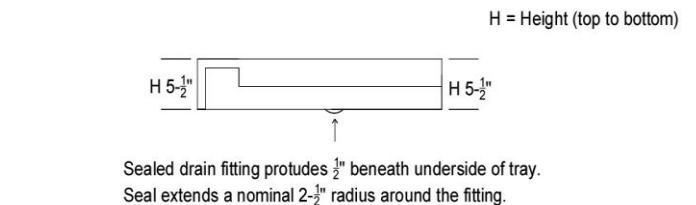

Tolerance: H = $\pm \frac{1}{8}$ "

Integrated flange on left, right, and back sides of tray has a nominal thickness of $\frac{1}{8}$ ".



CODES & STANDARDS

MuraFlo shower trays comply with the following codes:

2009 – 2021 International Residential Code (IRC)
 2009 – 2021 International Plumbing Code (IPC)
 2009 – 2021 Uniform Plumbing Code (IPC)
 2016 – 2022 California Plumbing Code (CPC)
 2017 – 2023 City of Los Angeles Plumbing Code

MuraFlo shower trays are certified to the following standard:

IAPMO PS 106-2015e1,
 Tileable Shower Receptors & Shower Kits

Tested by RADCO Listing & Testing Division

MATERIAL DATA

* Materials are provided by third-party suppliers

Part/Material	Detail	Standards/Codes
Mosaic*	2" x 2" square glazed ceramic mosaic (2 colors)	Meets ANSI A137.1:2022 Standard Specifications for Ceramic Tile. In accordance with ASTM C648, ASTM C373. Meets DCOF.
Curb Tile*	Glazed porcelain (2 colors)	Meets ANSI A137.1:2022 Standard Specifications for Ceramic Tile. In accordance with ASTM C648, ASTM C373.
Curb Profile*	Anodized aluminum round edge trim (1 color)	N/A.
Grout*	High performance, polymer modified (2 colors)	Exceeds ANSI A118.7 Specifications for Ceramic Tile Grouts, Polymer-modified Cement Grout. Meets the listed ANSI A118.3 Specifications for Epoxy Grouts. ISO 13007: Classification CG2WAF.
Drain*	No-caulk, top-connect, shower module drain, with square stainless-steel strainer	Complies with: Uniform Plumbing Code (UPC); International Plumbing Code (IPC); National Plumbing Code (Canada). Certified to standards: ASME A112.18.2-2020/CSA B125.2-20.

Tile and mosaic placement has a +/-3/32" tolerance in all directions.

DISCLAIMERS:

- Ceramic mosaics have variations in color, shade, pattern, texture, and grout joint width, according to dye lot and caliber.
- Ceramic tile, including porcelain, has variations in color, shade, pattern, and texture according to dye lot and caliber.
- Grout has variations in color, shade, and texture.
- Your shower tray's finishes will be unique and will vary from images, samples, and display models.

INSTALLATION

As per owner manual.

Installation films:

<https://www.muraflo.com/pages/installation-films>

CARE AND MAINTENANCE

As per owner manual.

INSTALLATION / USER RISKS

As per owner manual.

LIMITED WARRANTY

Three-year limited warranty, as per owner manual.

E0067-2