


Model/Modelo: LS15-1PL

Lighted 15A Decorator Switch
Interruptor Decorativo
Iluminado de 15A

FEATURES

- Shallow-body design
- Clamp-type terminals for quick and easy installation and removal
- Illuminated paddle when switch is off



INSTALLATION INSTRUCTIONS/ INSTRUCCIONES PARA LA INSTALACIÓN

WARNING

Turn the power off at the circuit breaker before installing this device.

Read and understand these instructions before installing. This device is intended for installation in accordance with the National Electric Code and local regulations. It is recommended that a qualified electrician performs this installation. Make sure to turn off the circuit breaker or fuse(s) and make sure power is off before wiring the device.

Use copper wire only.

Use wires with a minimum temperature rating of 75°C (167°F)

ADVERTENCIAS

Ponga el disyuntor eléctrico en APAGADO antes de instalar este dispositivo.

Lea y verifique que comprende estas instrucciones antes de la instalación. Este dispositivo debe instalarse de acuerdo con el National Electric Code (NEC) de los Estados Unidos y las regulaciones locales. Se recomienda que un electricista calificado realice esta instalación.

Utilice cables de cobre exclusivamente.

Utilice cables con una clasificación mínima de temperatura de 75 °C (167 °F)

www.lider-electric.com

(833) 977-3915

support@lider-electric.com

[f](https://www.facebook.com/lider-electric) [i](https://www.instagram.com/lider-electric) [in](https://www.linkedin.com/company/lider-electric) [@lider-electric](https://www.tiktok.com/@lider-electric)

0205250257-01

SPECIFICATIONS/ ESPECIFICACIONES

Rating.....15 Amp, 120-277VAC
Wire Gauge.....#14--#12 AWG Solid Wire
Strip Length for clamp type terminals.....0.5 inch
Terminal Screws Torque.....14lbf-in


WARRANTY

This device is warranted to be free of material and workmanship defects for 1 year from the date of purchase. Original receipt or proof of purchase from an authorized retailer must be presented upon warranty claim. ALL claims must be verified and approved by Lider-Electric, Inc. Warranties from other Lider-Electric products may vary. This warranty is nontransferable and does not cover normal wear and tear or any malfunction, failure, or defect resulting from misuse, abuse, neglect, alteration, modification, or improper installation. To the fullest extent permitted by the applicable state law, Lider-Electric shall not be liable to the purchaser or end user customer of Lider-Electric products for direct, indirect, incidental, or consequential damages even if Lider-Electric has been advised of the possibility of such damages. Lider-Electric's total liability under this or any other warranty, express or implied, is limited to repair, replacement or refund. Repair, replacement or refund are the sole and exclusive remedies for breach of warranty or any other legal theory.


WIRING DIRECTIONS/ INDICACIONES PARA EL CABLEADO

1. Remove the wall plate.
2. Remove existing switch from wall box and prior to disconnecting wires, identify the wires and label as needed.
3. Remove wires from existing switch.
4. Follow the diagram below to connect the LS15-1PL.

1. Retire la placa de la pared.
2. Quite el interruptor actual de la caja de embutir de la pared y antes de desconectar los cables, identifiquelos y coloque etiquetas según sea necesario.
3. Quite los cables del interruptor existente.
4. Siga las indicaciones del diagrama que se muestra a continuación para conectar el interruptor con sensor LS15-1PL.

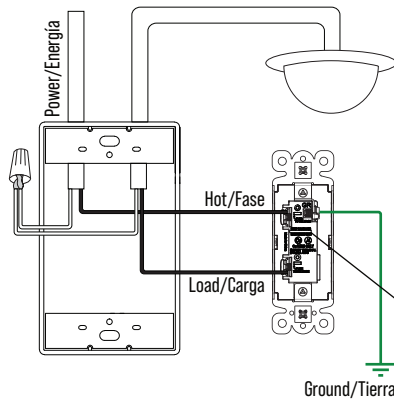

Illuminates when the Switch is off
Se ilumina cuando el interruptor está apagado

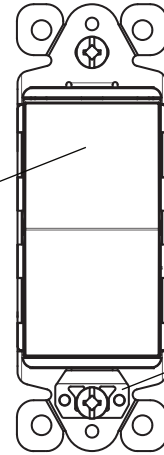

Self-Grounding Clip
Clip de Auto-Conexión a Tierra

