

****Take care in uncrating and moving.**

****Use safe lifting practices or a mechanical material lift to help set the top slab.**

1) Be sure the surface you plan to install on is flat and level.

2) Set legs in desired position. They must be plumb and parallel with each other. Measure the stone top to be sure the legs are located correctly.


3) We recommend using a construction adhesive, such as Loctite PL, or an epoxy, such as Loctite 5 minute epoxy, between the legs and top for the sturdiest installation. The adhesive must be formulated for use with marble to prevent possible staining.

Care & Maintenance:

Your bench has been factory sealed using a high quality impregnating sealer. Time and environmental factors slowly degrade this seal and re-application will be necessary. Clean with a soft rag and a stone cleaner.

Test the sealer several times per year by splashing a few drops of water on the surface. If beading occurs, the seal is still good. If the water spreads or soaks into the stone, it is time to re-apply.

Use only stone cleaners and stone sealers that are specifically for use on marble and follow the manufacturers instructions.

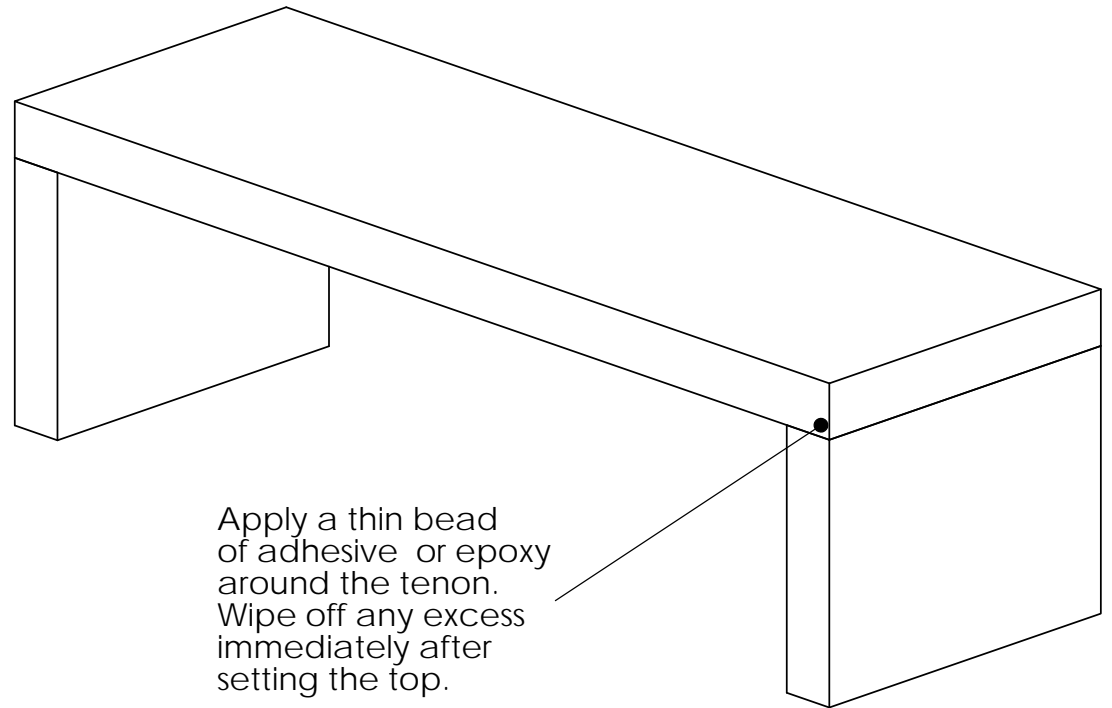

Sierra Bench Installation

COPYRIGHT 2009 STONE FOREST, INC.