MAGNAFLOW
Performance EXHAUST

Mufflers, Converters,
Systems and Tips

2008 Mitsubishi Lancer 2.0L

2.25" U-Bolt Clamp

Inlet Pipe Assy

2.5" TORCA Clamp

Muffler Assy.

Tail Pipe Assy.

2.5" TORCA Clamp
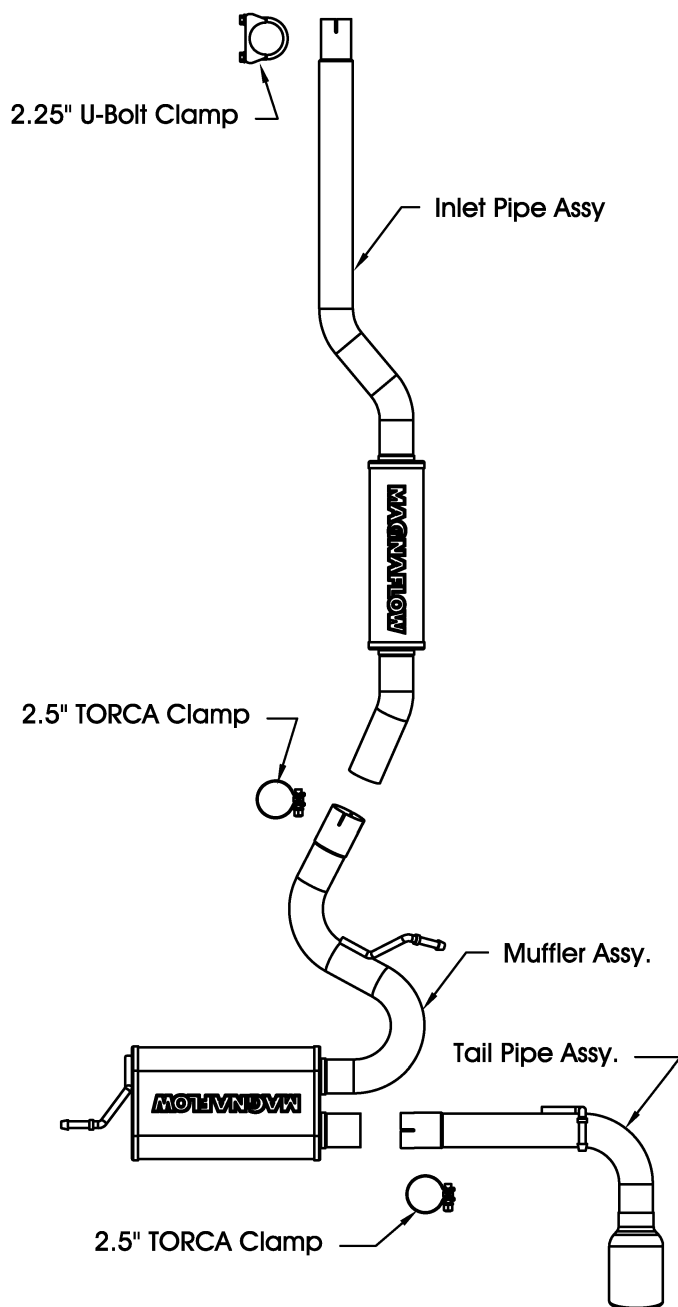
Warning: *When working on, under, or around any vehicle exercise caution. Please allow the vehicle's exhaust system to cool before removal, as exhaust system temperatures may cause severe burns. If working without a lift, always consult vehicle manual for correct lifting specifications. Always wear safety glasses and ensure a safe work area. Serious injury or death could occur if safety measures are not followed.*

Step 1: (Carefully read all instructions before installation) Disconnect the vehicle's battery before removal of the OEM exhaust. This will allow the computer to reset itself with the new system, and prevent electrical accidents.

Step 2: Remove the OEM system by first cutting the inlet pipe 3" behind the bracket behind the catalytic converter. Carefully remove the rest of the OEM system. Retain the original mounting hardware and rubber insulators as they will be need to install your new MAGNAFLOW system.

Step 3: Slip the inlet pipe of the new system over the cut portion of the OEM system and secure with the provided 2.25" U-Bolt clamp. Working front to rear install the rest of the new system locating the hangers into the appropriate locations.

Step 4: With all components mounted loosely, adjust the system for overall aesthetics and clearance of frame & bodywork. (MAGNAFLOW recommends at least 1/2" of clearance between the exhaust system and any body panels to prevent heat-related body damage or fire.)

Step 5: Once a final position has been chosen for the new system, evenly tighten all fasteners from front to rear. The supplied band clamps must be VERY tight to properly align the pipes and prevent leaks (Approximately 40ft-lbs). U-bolt clamps should be tightened to approximately 30-35ft-lbs. Inspect all fasteners after 25-50 miles of operation and retighten if necessary.

MAGNAFLOW Performance Exhaust recommends professional installation on all their products

Technical support: 1-800-959-9226   ext. 4500