



## **MAP WRX-5G-CB**

### **Install Instructions**



## **What's in the box :**

- 1x MAP 2022 WRX Front Pipe
- 1x MAP 2022 WRX Mid Pipe
- 2x MAP 2022 WRX Axlebacks
- 2x 3.5" Dual Exhaust Tips (options available)
- 1x 3" V-Band Clamp
- 2x 2.5" V-Band Clamp
- 1x Anti-seize Packet

# Tools needed



## You will need :

3/8ths ratchet

12mm socket

13mm socket

14mm socket

# Step 1



Remove front pipe spring bolts (14mm)

## Step 2



Remove both side muffler bolts  
X4 (14mm)

# Step 3



Remove front pipe from exhaust hanger

# Step 4




Remove both mufflers from their  
2 hangers

# Step 5



Install MAP catback midpipe, securing to the factory turbo back exhaust with included bolts

# Step 5.1

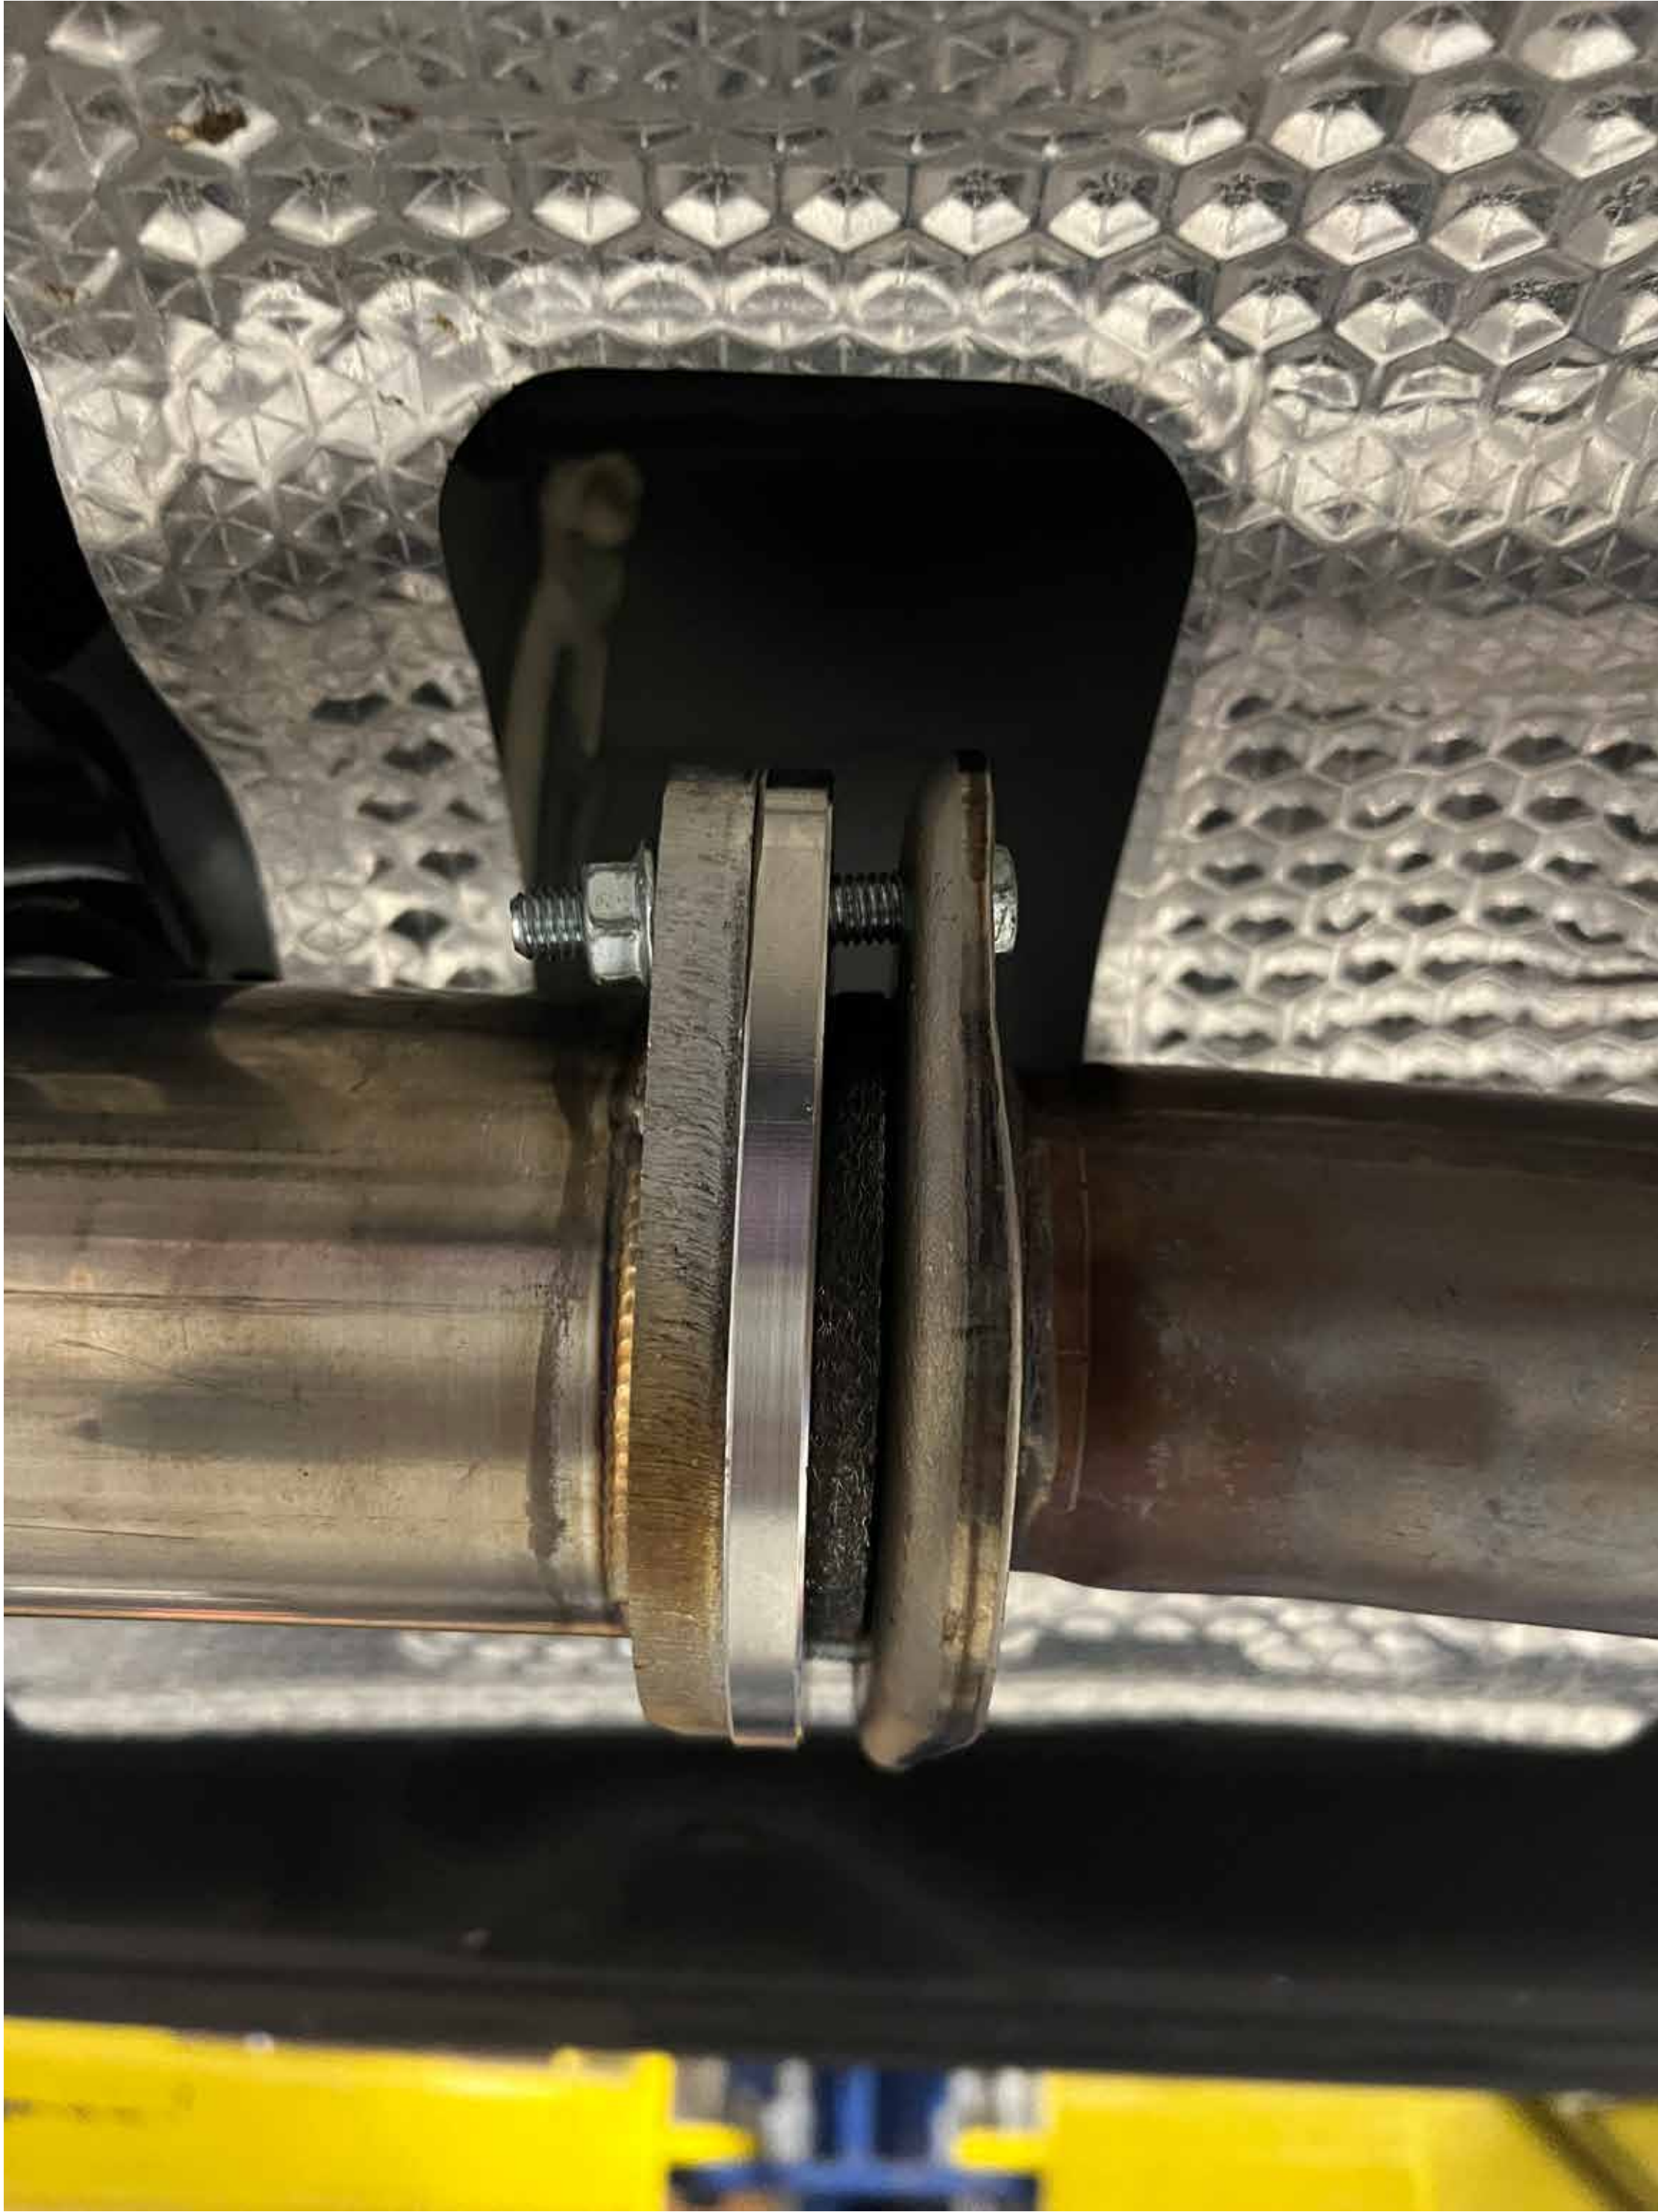

If installing in conjunction with a factory downpipe, use optional exhaust flange adapter



# Step 6




Connect the front pipe to the Y pipe and LOOSELY secure with included vband. **Use anti seize**

# Step 7



Install both mufflers to their respective hangers and secure with vband loosely. **Use anti seize**

## Step 8

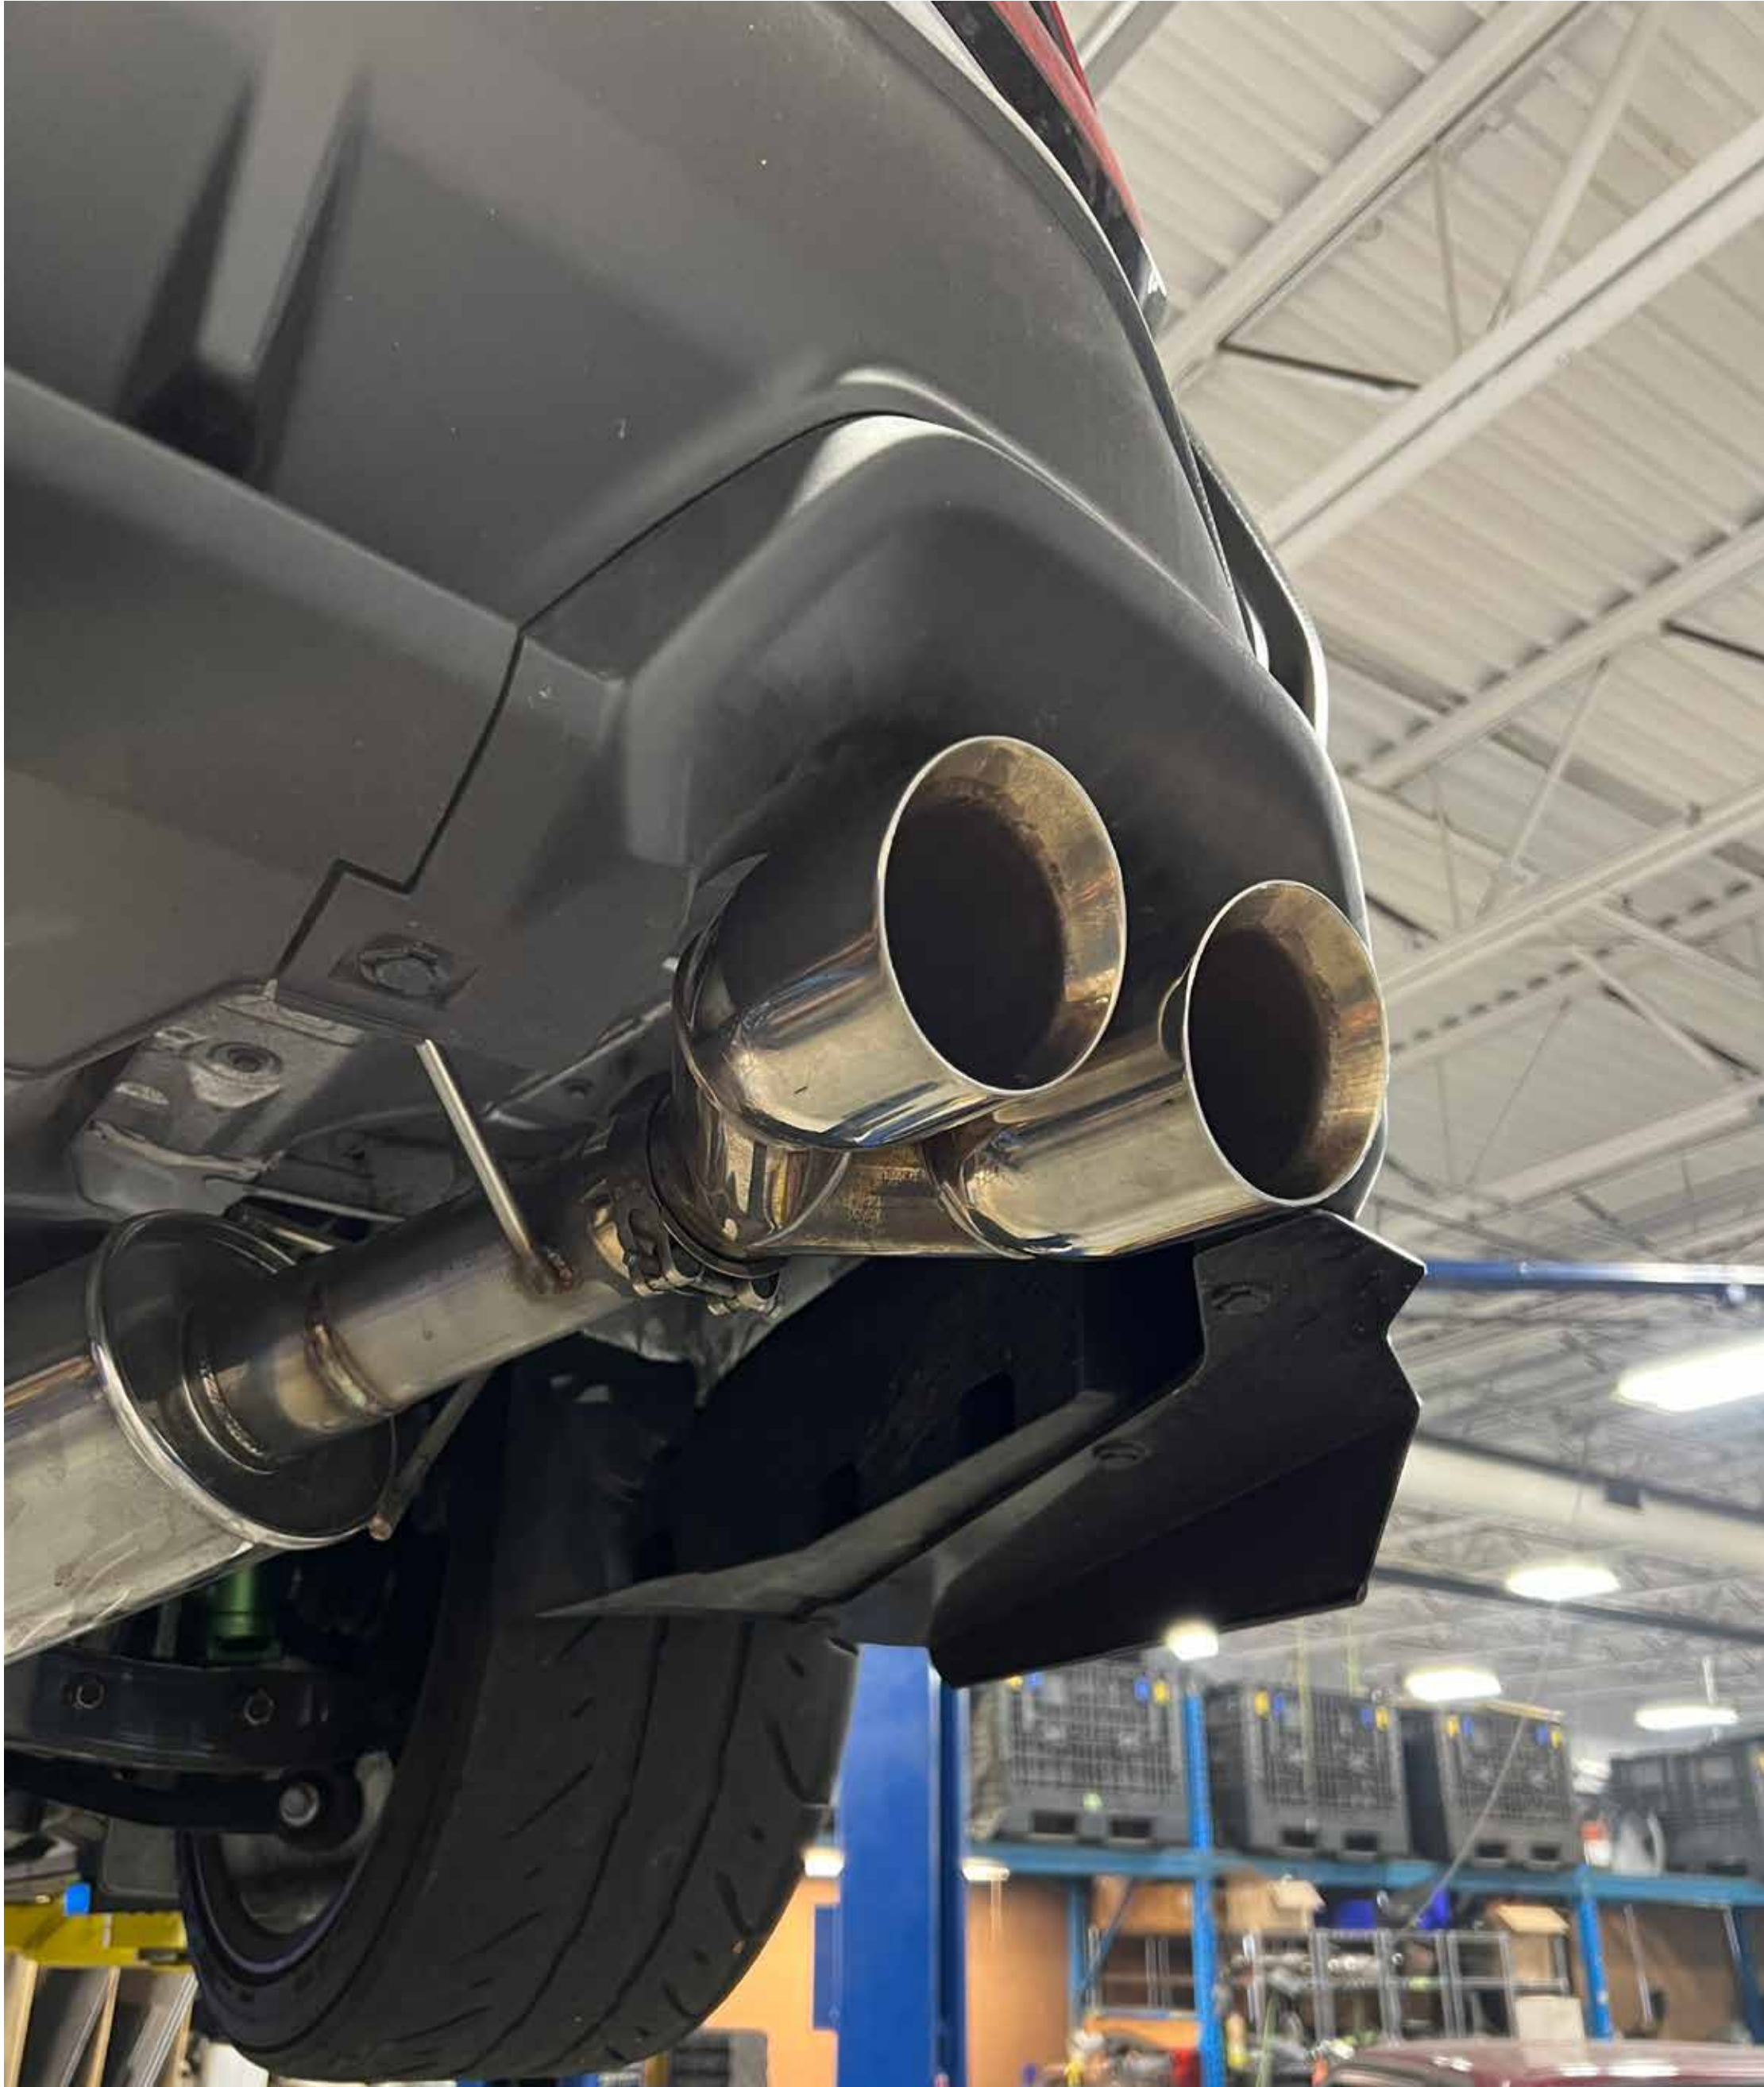

Install included MAP tips and clamps onto mufflers. Adjust to desired fitment and tighten clamps with hand tools. Be sure to place clamps at the end of the tips to ensure proper clamping force.

**Use anti seize on threads**

# Step 9




Adjust Y pipe and muffler connections to dial in tip fitment within the bumper shroud, tighten from midpipe working backwards until all vbands are tight


We hope you enjoy your purchase! Reach out to us with any issues or concerns.



1-888-627-3736

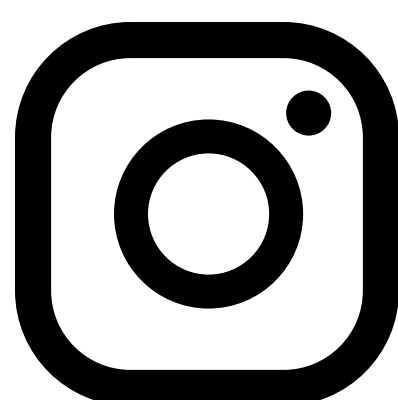

@maperformance

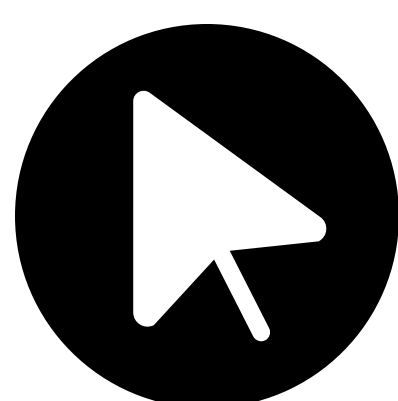

support@maperformance.com



www.facebook.com/modernautomotiveperformance/

