




Classic®

WALL HANGER COLLECTION


SPECIFICATIONS

FINIAL	LENGTH
Pineapple	1 3/8"
Round	3/4"
Urn	1 1/4"
Crown	1 7/8"
Acorn	1 1/4"
ROD GAUGE	Solid
ROD DIAMETER	1/2"

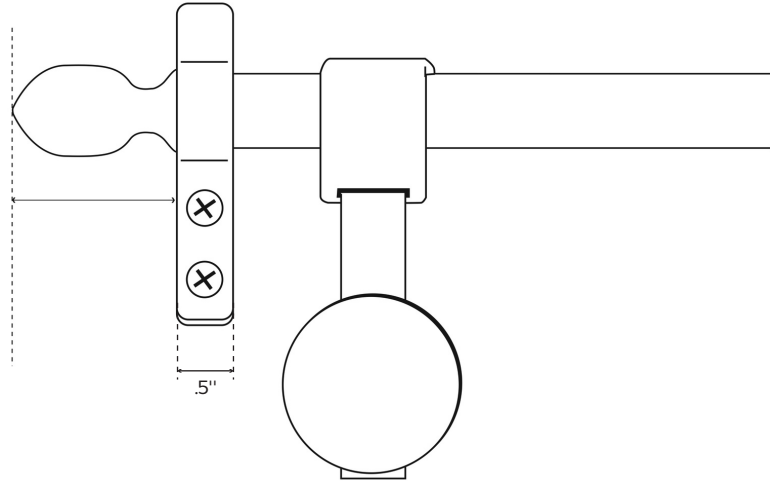

Zoroufy® Classic rods slide into each bracket approximately 1/2".
Finials attach to the bracket.

INSTALLATION INSTRUCTIONS

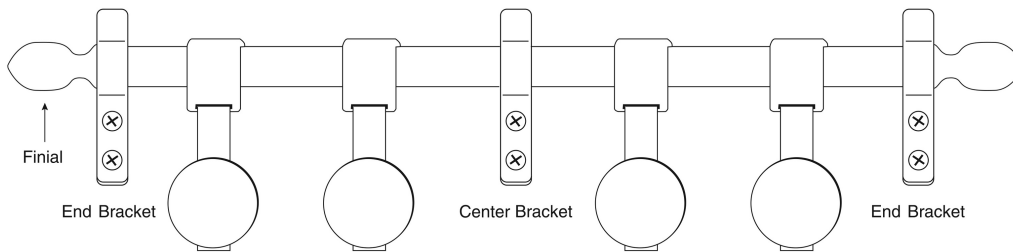

Classic Wall Hanger (under 72")

1. Attach the finials to the end brackets using the screws provided in the finials.
2. Hold the rod in the desired position against the wall and mark the position of holes in the left end bracket.
3. While supporting the opposite side, install the left end bracket.
4. With the rod in the left end bracket, slide the center bracket over the rod and install in the center.
5. Slide the right end bracket onto the opposite end of the rod and install.
6. Attach the clips to the rug, tapestry, or quilt and secure in place by tightening the disc. Place the clips over the rod.

Classic Wall Hanger (over 72")

1. Attach the finials to the end brackets using the screws provided in the finials.
2. Hold the first rod in the desired position against the wall and mark the position of holes in the left end bracket.
3. While supporting the opposite side, install the left end bracket.
4. With the rod in the left end bracket, slide the first center bracket over the first rod and install in the center.
5. Install the double center bracket on the opposite end of the first rod by inserting rod half-way. Insert the second rod into the double center bracket and secure rods by tightening the small screws.
6. Slide the second center bracket over the second rod and install in the center.
7. Install the right end bracket on the end of the second rod.
8. Attach the clips to the rug, tapestry, or quilt and secure in place by tightening the disc. Place the clips over the rod.

Wall anchors must be used if bracket screws are not installed into a stud.

ALL PARTS ARE LACQUER COATED TO RESIST TARNISHING. DO NOT USE BRASS CLEANER OR OTHER ABRASIVES. TO CLEAN, SIMPLY WIPE WITH A SOFT DRY CLOTH. PERIODICALLY CHECK AND TIGHTEN ALL SCREWS AND HARDWARE.