


see what Delta can doSM

STEAMBATH INTERFACE

■ Transitional Square

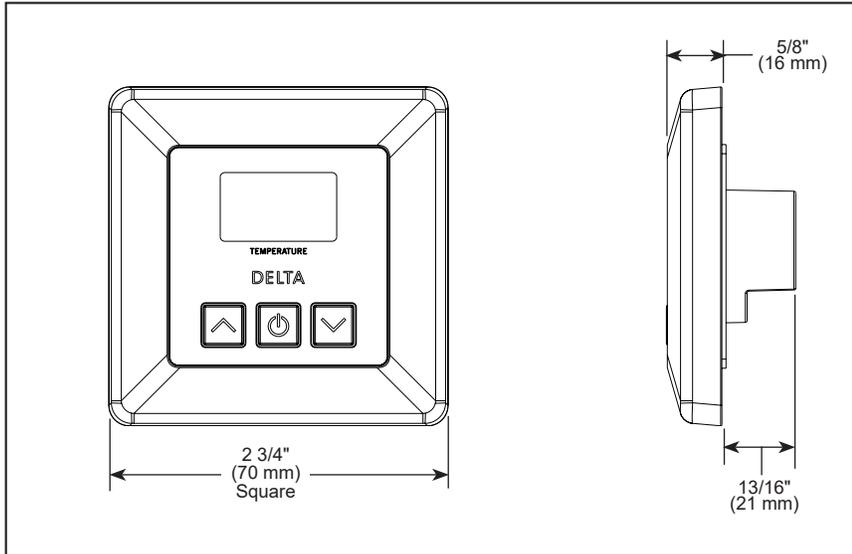


FEATURES:

- Preset time and programmable temperature
- Digital display of ambient and set temperature

STANDARD SPECIFICATIONS:

- Surface Mount - 1 1/2" hole required
- Must mount inside the steam room
- The multi-conductor cable should be run through 3/4" conduit to protect cable from damage and to facilitate easy replacement
- Mount control near seating area and not above Steam head
- Control should be mounted 48" above the floor
- Steam head to be mounted 12" to 18" above the finished floor or 6" above the rim of the tub and as far from the seating area as possible.
- Required Electrical Service: Low-voltage connection from 5P-EST series steam generators via multi-conductor cable (supplied with generator)
- Model is not compatible with 5GE-SMP series generators

EP103305 PACKAGE CONTENTS

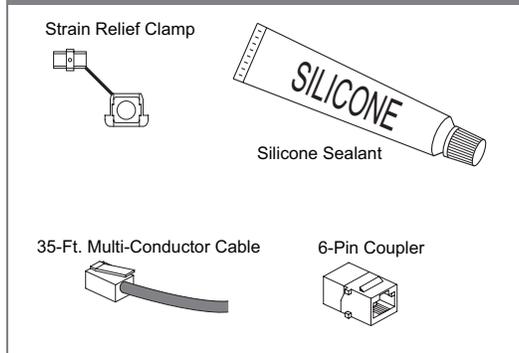

▲ Designate Proper Finish Suffix

WARRANTY

- Please see separate warranty documentation