



FILMTEC™ Membranes

FILMTEC Small Commercial Elements

Features

FILMTEC™ reverse osmosis (RO) elements offer the highest quality water for small commercial systems purifying less than one gallon per minute (0.2 m³/d) of RO water.


- FILMTEC membranes are available in a variety of sizes to meet a wide range of space requirements.
- FILMTEC XLE extra low energy elements operate at the lowest pressure in the industry, resulting in lower energy costs and enabling system builders to use lower cost components.
- In addition to the highest quality water and the lowest energy costs, FILMTEC membranes also deliver savings by providing the industry's longest lasting and most reliable performance.

Product Specifications

| Product | Part Number | Active Area ft ² (m ²) | Applied Pressure psig (bar) | Permeate Flow Rate gpd (m ³ /d) | Stabilized Salt Rejection (%) |
|-----------|-------------|--------------------------------------------------|--------------------------------|-----------------------------------------------|----------------------------------|
| TW30-2026 | 80635 | 7 (0.7) | 225 (15.5) | 220 (0.83) | 99.5 |
| TW30-2514 | 80639 | 7 (0.7) | 225 (15.5) | 200 (0.76) | 99.5 |
| TW30-2521 | 80641 | 13 (1.2) | 225 (15.5) | 325 (1.23) | 99.5 |
| XLE-2521 | 154530 | 13 (1.2) | 100 (6.9) | 365 (1.38) | 99.0 |
| TW30-4014 | 80605 | 20 (1.9) | 225 (15.5) | 525 (1.99) | 99.5 |
| TW30-4021 | 80608 | 36 (3.3) | 225 (15.5) | 900 (3.41) | 99.5 |
| XLE-4021 | 154540 | 36 (3.3) | 100 (6.9) | 1,025 (3.88) | 99.0 |

1. Permeate flow and salt rejection based on the following test conditions: TW30 elements are tested on a 2,000 ppm NaCl feed stream, XLE performance based on a 500 ppm NaCl feed stream, pressure specified above, 77°F (25°C) and the following recovery rates; TW30-2026 – 10%, TW30-2521, XLE-2521, TW30-4021, XLE-4021 – 8%, TW30-2514, TW30-4014 – 5%.
2. Permeate flows for individual elements may vary +/-20%.
3. For the purpose of improvement, specifications may be updated periodically.

Figure 1

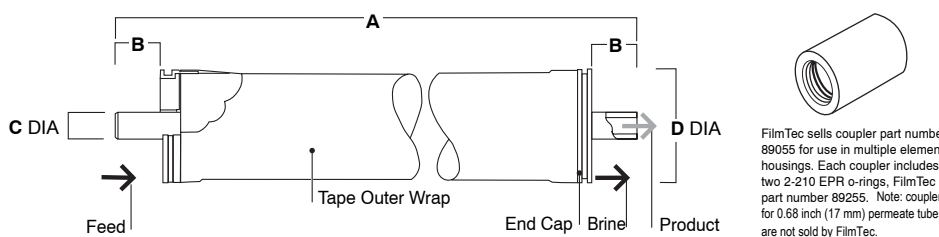

| Product | Maximum Feed Flow Rate gpm (m ³ /h) | Dimensions – Inches (mm) | | | |
|------------------------|---------------------------------------------------|--------------------------|-----------|-----------|----------|
| | | A | B | C | D |
| TW30-2026 ¹ | 5 (1.1) | 26.0 (660) | 1.18 (30) | 0.68 (17) | 1.8 (46) |
| TW30-2514 | 6 (1.4) | 14.0 (356) | 1.19 (30) | 0.75 (19) | 2.4 (61) |
| TW30-2521 | 6 (1.4) | 21.0 (533) | 1.19 (30) | 0.75 (19) | 2.4 (61) |
| XLE-2521 | 6 (1.4) | 21.0 (533) | 1.19 (30) | 0.75 (19) | 2.4 (61) |
| TW30-4014 | 14 (3.2) | 14.0 (356) | 1.05 (27) | 0.75 (19) | 3.9 (99) |
| TW30-4021 | 14 (3.2) | 21.0 (533) | 1.05 (27) | 0.75 (19) | 3.9 (99) |
| XLE-4021 | 14 (3.2) | 21.0 (533) | 1.05 (27) | 0.75 (19) | 3.9 (99) |

1. TW30-2026 has double o-rings on each end of the permeate tube. Couplers for 0.68 inch (17 mm) permeate tubes are not sold by FilmTec. 1 inch = 25.4 mm
2. Refer to FilmTec Design Guidelines for multiple-element systems.
3. TW30-2026 elements fit nominal 2.0 inch pressure vessels. TW30-2514, TW30-2521 and XLE-2521 elements fit nominal 2.5 inch I.D. pressure vessels. TW30-4014, TW30-4021, and XLE-4021 elements fit nominal 4 inch I.D. pressure vessels.

Operating Limits

- Membrane Type Polyamide Thin-Film Composite
- Maximum Operating Temperature 113°F (45°C)
- Maximum Operating Pressure 600 psig (41 bar)
- Maximum Pressure Drop 13 psig (0.9 bar)
- pH Range, Continuous Operation^a 2 - 11
- pH Range, Short-Term Cleaning (30 min.)^b 1 - 13
- Maximum Feed Silt Density Index (SDI) 5
- Free Chlorine Tolerance^c <0.1 ppm

^a Maximum temperature for continuous operation above pH 10 is 95°F (35°C).

^b Refer to Cleaning Guidelines in specification sheet 609-23010.

^c Under certain conditions, the presence of free chlorine and other oxidizing agents will cause premature membrane failure. Since oxidation damage is not covered under warranty, FilmTec recommends removing residual free chlorine by pretreatment prior to membrane exposure. Please refer to technical bulletin 609-22010 for more information.

Important Information

Proper start-up of reverse osmosis water treatment systems is essential to prepare the membranes for operating service and to prevent membrane damage due to overfeeding or hydraulic shock. Following the proper start-up sequence also helps ensure that system operating parameters conform to design specifications so that system water quality and productivity goals can be achieved.

Before initiating system start-up procedures, membrane pretreatment, loading of the membrane elements, instrument calibration and other system checks should be completed.

Please refer to the application information literature entitled "Start-Up Sequence" (Form No. 609-02077) for more information.

Operation Guidelines

Avoid any abrupt pressure or cross-flow variations on the spiral elements during start-up, shutdown, cleaning or other sequences to prevent possible membrane damage. During start-up, a gradual change from a standstill to operating state is recommended as follows:

- Feed pressure should be increased gradually over a 30-60 second time frame.
- Cross-flow velocity at set operating point should be achieved gradually over 15-20 seconds.
- Permeate obtained from first hour of operation should be discarded.

General Information

- Keep elements moist at all times after initial wetting.
- If operating limits and guidelines given in this bulletin are not strictly followed, the limited warranty will be null and void.
- To prevent biological growth during prolonged system shutdowns, it is recommended that membrane elements be immersed in a preservative solution.
- The customer is fully responsible for the effects of incompatible chemicals and lubricants on elements.
- Maximum pressure drop across an entire pressure vessel (housing) is 30 psi (2.1 bar).
- Avoid static permeate-side backpressure at all times.

FILMTEC™ Membranes

For more information about FILMTEC membranes, call the Dow Liquid Separations business:

North America: 1-800-447-4369
Latin America: (+55) 11-5188-9222
Europe: (+32) 3-450-2240
Pacific: +60 3 7958 3392
Japan: +813 5460 2100
China: +86 21 2301 9000

<http://www.filmtec.com>

Notice: The use of this product in and of itself does not necessarily guarantee the removal of cysts and pathogens from water. Effective cyst and pathogen reduction is dependent on the complete system design and on the operation and maintenance of the system.

Notice: No freedom from any patent owned by Seller or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Seller assumes no obligation or liability for the information in this document. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

