


MOGeometry

From Flint Hills of Kansas to the Foothills of Ogden, the MOG was designed to go fast, in confidence, over any terrain you deem appropriate to MOG.

With six frame sizes and three unique fork rakes (most brands only offer 1 or 2) the MOG has been designed to ensure that optimal handling is achieved regardless of frame size.

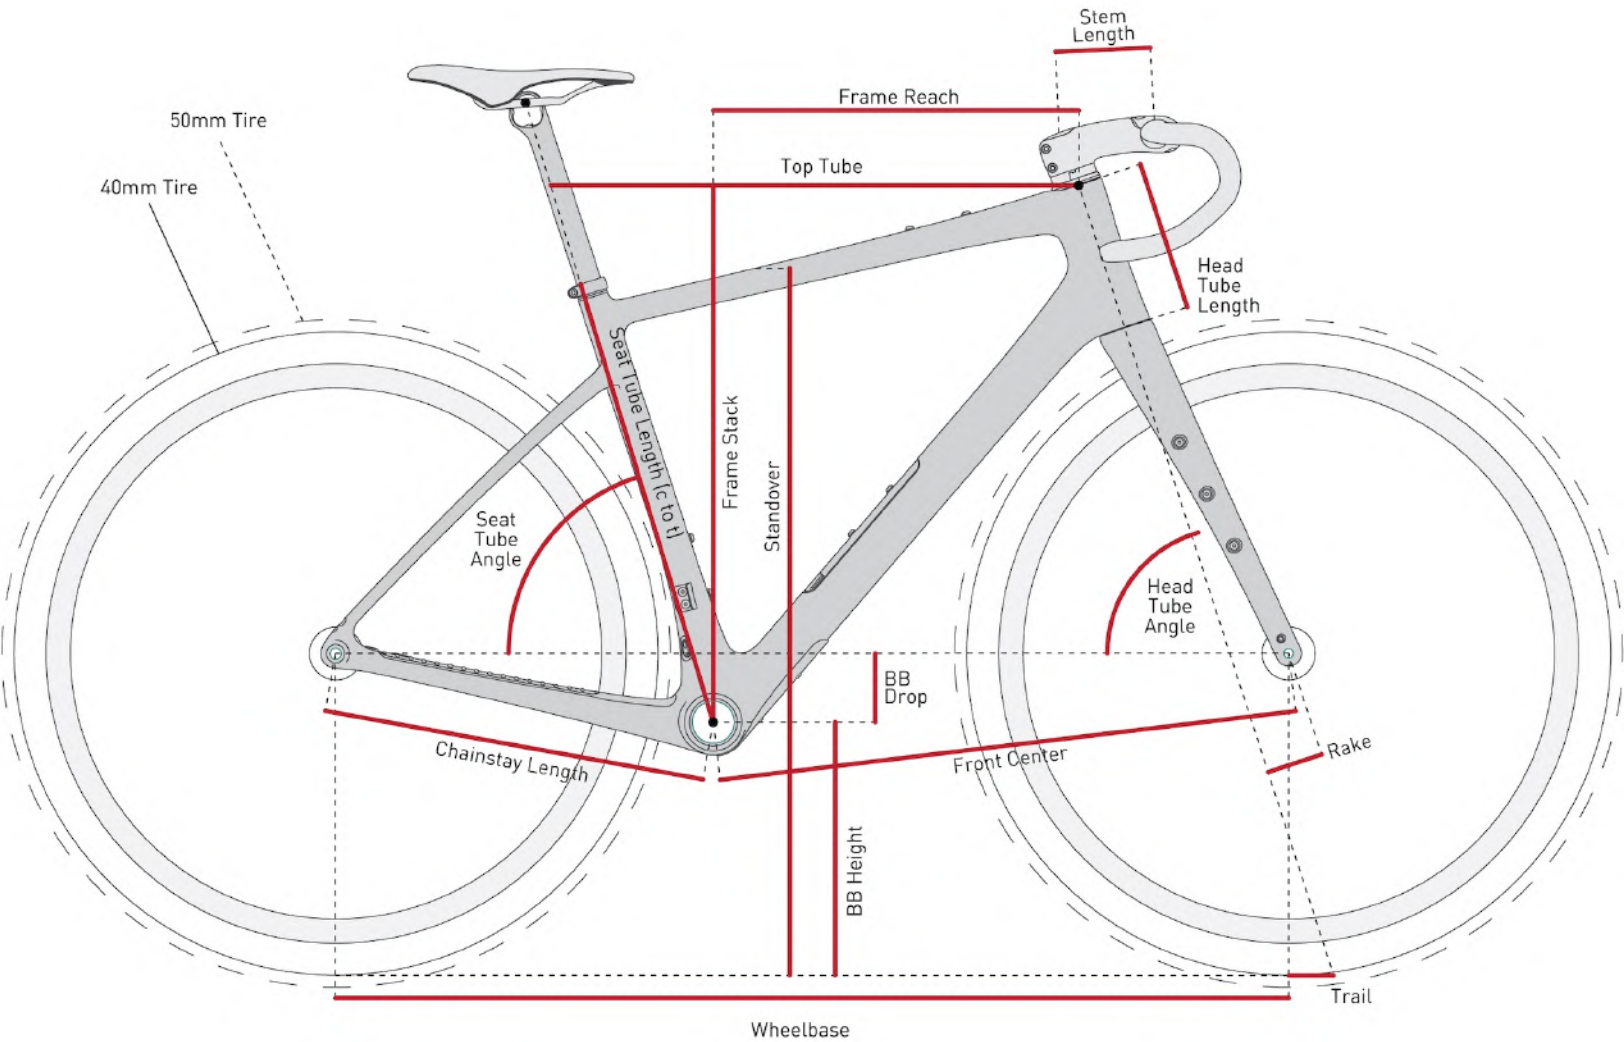

	MOG Geometry					
	49	52	54	56	58	60
Reach	367	378	389	397	405	415
Stack	520	543	565	587	605	630
STL(c-top)	439	459	480	500	518	540
SA	74.5	74	73.75	73.5	73.2	72.75
HA	71	71	71.25	71.25	71.5	71.5
HTL	92	117	140	163	183	209
BBD	77	77	75	75	73	73
CSL	420	420	420	420	420	420
WB	993	1012	1027	1042	1053	1071
FC	580	599	613	629	639	657
RC	412.9	412.9	413.2	413.2	413.6	413.6
RAKE	57	57	55	55	53	53
TTL (effective)	511	534	554	571	588	611
BB Height @ 50	289	289	291	291	293	293
BB Height @ 44	279	279	281	281	283	283
BB Height @ 40	277	277	279	279	281	281
BB Height @ 35	273	273	275	275	277	277
Standover @ 50	714	734	756	776	796	819
Standover @ 44	705	725	747	767	787	809
Standover @ 40	702	722	744	764	784	807
Standover @ 35	698	718	740	760	780	803
Trail @ 50	65.5	65.6	66	66	66.4	66.4
Trail @ 44	62.3	62.3	62.8	62.8	63.2	63.2
Trail @ 40	61.4	61.4	61.9	61.9	62.4	62.4
Trail @ 35	60.1	60.1	60.6	60.6	61.1	61.1