

BUNN®

AXIOM 4/2 TWIN (4U/ 2L Warmers)

Medium volume brewing solution with simple switch controls

16.4 in x 19.1 in x 21.4 in

Capacity (Servings/Hour): 240
(8 ounces servings)




- Cold brew lock-out and automatic warmer time-out ensure high quality, fresh tasting coffee
- Electronic diagnostics and built-in tank drain make service easier
- Front of machine programming simplifies installation
- For high lime areas, BrewLOGIC® technology calculates flow rate and adjusts brew time to maintain consistent pot levels
- Pot level, cold brew lock-out and tank temperature set easily from advanced touch pad on front of machine
- All stainless steel construction
- Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; coffee strength controlled with variable by-pass.
- Energy-saver mode reduces tank temperature during idle periods
- Ensures coffee brew quality with cold brew lock out capability
- Hot water faucet
- Six individually controlled warming stations
- SplashGard® funnel deflects hot liquids away from the hand
- Twin brew head system

Related products

- 20115.0000 Regular Paper Filters 1000/case
- 20157.0001 Gourmet C Funnel Paper Filters 1000/cs
- 20217.0000 Funnel
- 39000.0001 WATER FILTER, EQHP-10L
- 39000.0004 WATER FILTER, EQHP-10
- 39000.0010 WATER FILTER, SCALE-PRO
- 06100.0101 64oz Blk Hndl Easy Pour Decanter(1pk)
- 06100.0102 64oz Blk Hndl Easy Pour Decanter(2pk)
- 06100.0103 64oz Blk Hndl Easy Pour Decanter(3pk)
- 06100.0106 64oz Blk Hndl Easy Pour Decanter(6pk)
- 06100.0112 64oz Blk Hndl Easy Pour Decanter(12pk)
- 06100.0124 64oz Blk Hndl Easy Pour Decanter(24pk)

Product No	Channel	Product Category	Water Access	Electrical (Voltage)
38700.0014	Amusement and Leisure College and University Convenience Store Full Service Healthcare Lodging and Hospitality Quick Serve Restaurant	Coffee Brewer	Plumbed	120/208-240
UPC	Coffee Server Type	Coffee Capacity Range	Brewer Type	Number of Warmers
72504083674	Decanter	Medium	Automatics	Four Upper / Two Lower
Finish	Funnel Locks	Number of Wires (+GND)	Cord Attached	BrewLOGIC
Stainless	No	3	No	Yes

2D Format CAD Available	Minimum Input Pressure	Maximum Input Pressure	Inlet Water Fitting	Digital Brewer Control
Yes	20 PSI	90 PSI	3/8" Male Flare Fitting	Yes
Faucet Location	Funnel Type	Machine Depth	Machine Width	Machine Height
Upper	Stainless Steel	21.4 in	16.4 in	19.1 in
Shipping Box Length	Shipping Box Width	Shipping Box Height	Shipping Weight	Volume of shipped box
25.2 in	19.3 in	21.1 in	52.26 lb	5.94 ft3

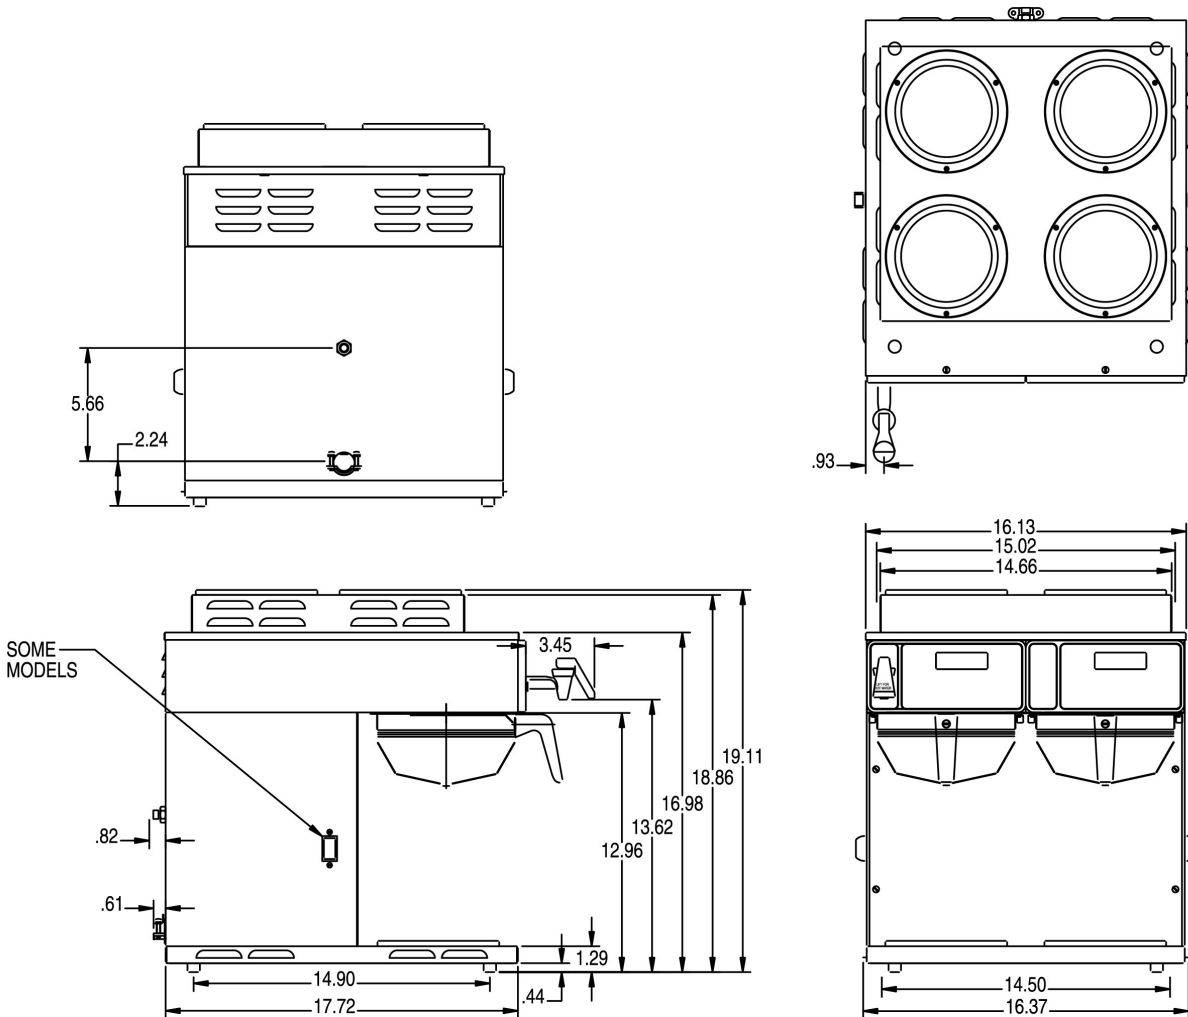

Electric & Capacity

Electrical Configuration Option
 Volts-Factory Wired: 120/208-240
 Phase-Factory Wired: 1

Watts-Factory Wired: 6700
Hertz-Factory Wired: 60
Amps-Factory Wired: 27.9
Capacity (Servings/Hour):240

To see illustrated parts manuals, visit bunn.com/support/manuals

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions, or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com. All dimensions shown in inches.